

GSM 850_Head_0625

Frequency: 836.6 MHz; Duty Cycle: 1:1.99986; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 40.968$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(9.73, 9.73, 9.73); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1846

RHS/Touch_GPRS 4 slots_ch 190/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0808 W/kg


RHS/Touch_GPRS 4 slots_ch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.388 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.0804 W/kg

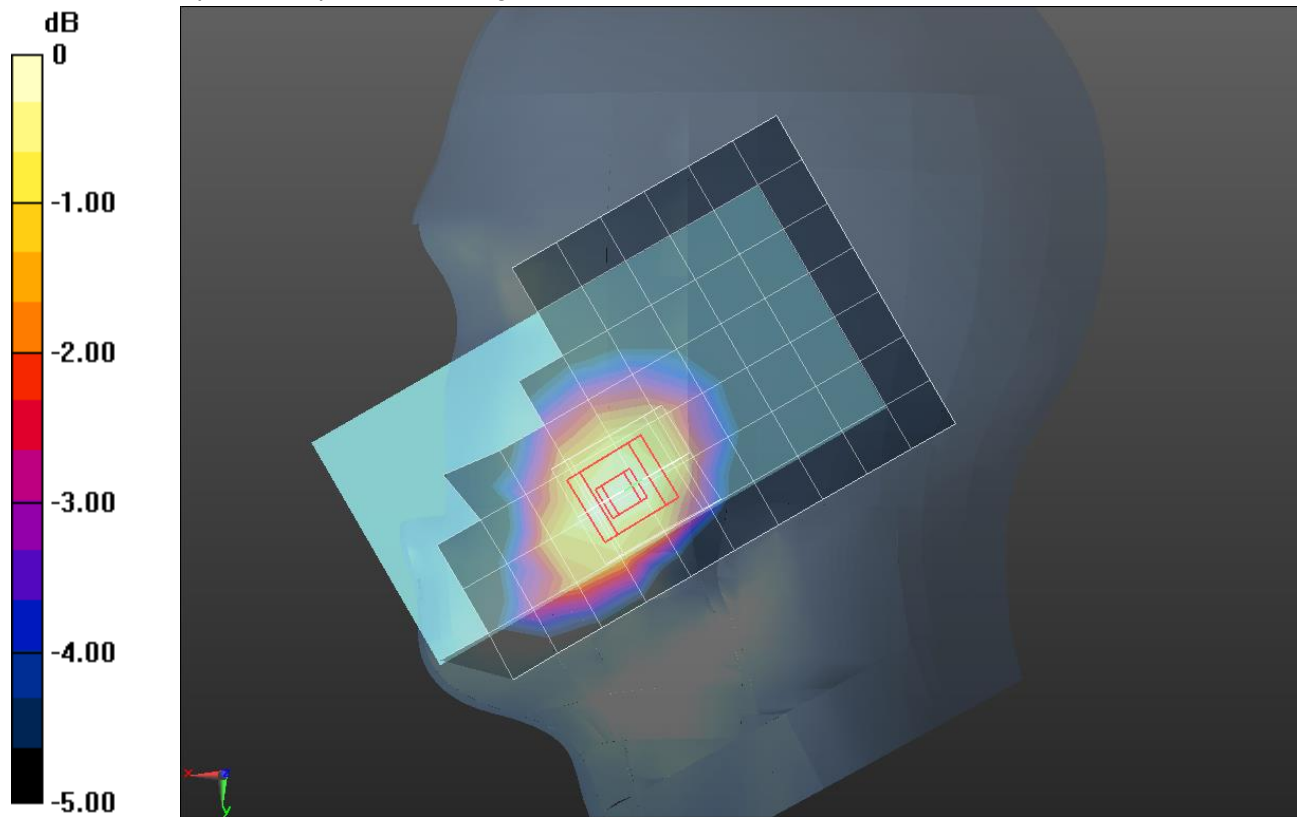

0 dB = 0.0804 W/kg = -10.95 dBW/kg

GSM 850_Body_0625

Frequency: 836.6 MHz; Duty Cycle: 1:1.99986; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.017$ S/m; $\epsilon_r = 53.644$; $\rho = 1000$ kg/m³


DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(10.19, 10.19, 10.19); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1167

Rear/GPRS 4 slots_ch 190 10mm/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.301 W/kg

Rear/GPRS 4 slots_ch 190 10mm/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.77 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.427 W/kg
SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.143 W/kg
Maximum value of SAR (measured) = 0.336 W/kg

Rear/GPRS 4 slots_ch 190 10mm/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.77 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.333 W/kg
SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.162 W/kg
Maximum value of SAR (measured) = 0.283 W/kg

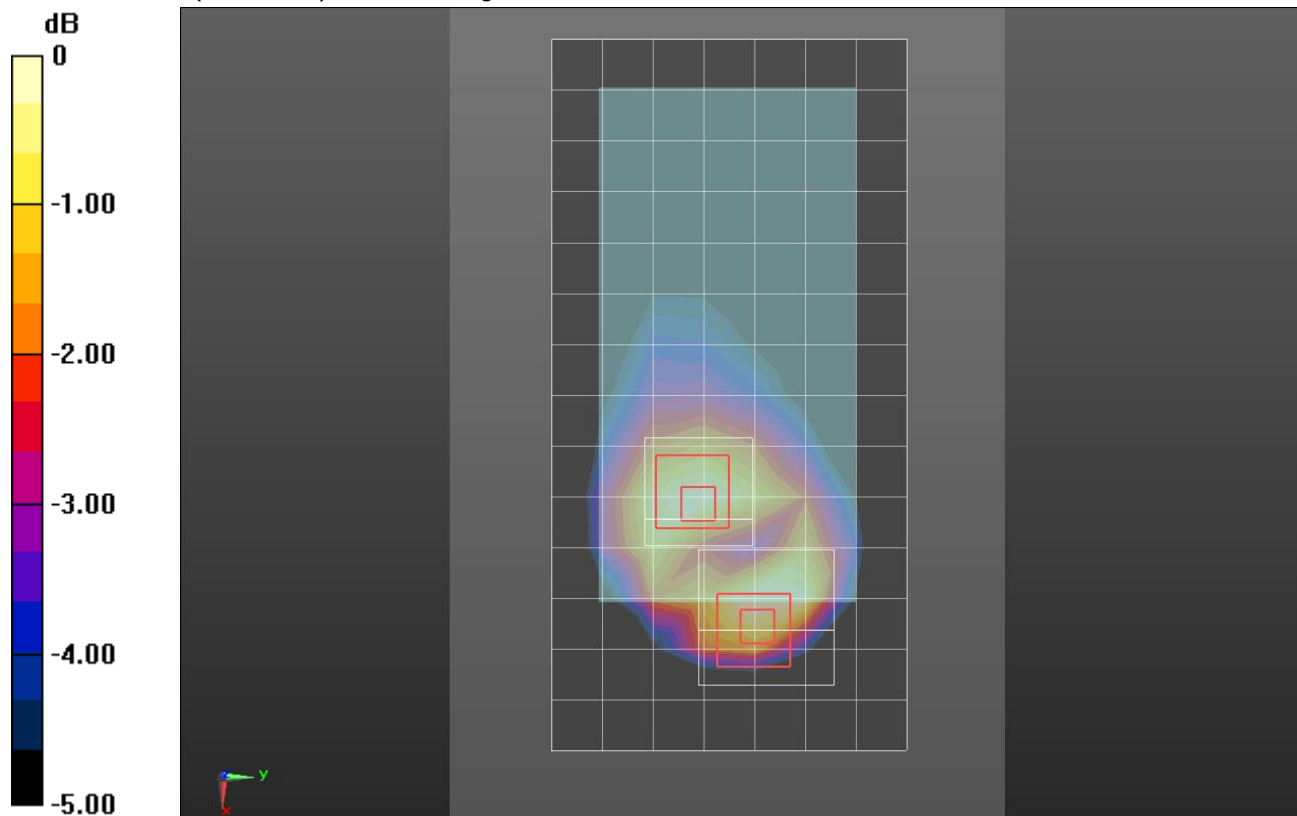


GSM 1900_Head_0627

Frequency: 1880 MHz; Duty Cycle: 1:1.99986; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 38.477$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(7.87, 7.87, 7.87); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

LHS/Touch_GPRS 4 slots_ch 661 2 2/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0920 W/kg

LHS/Touch_GPRS 4 slots_ch 661 2 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.489 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.120 W/kg
SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.047 W/kg
Maximum value of SAR (measured) = 0.0978 W/kg

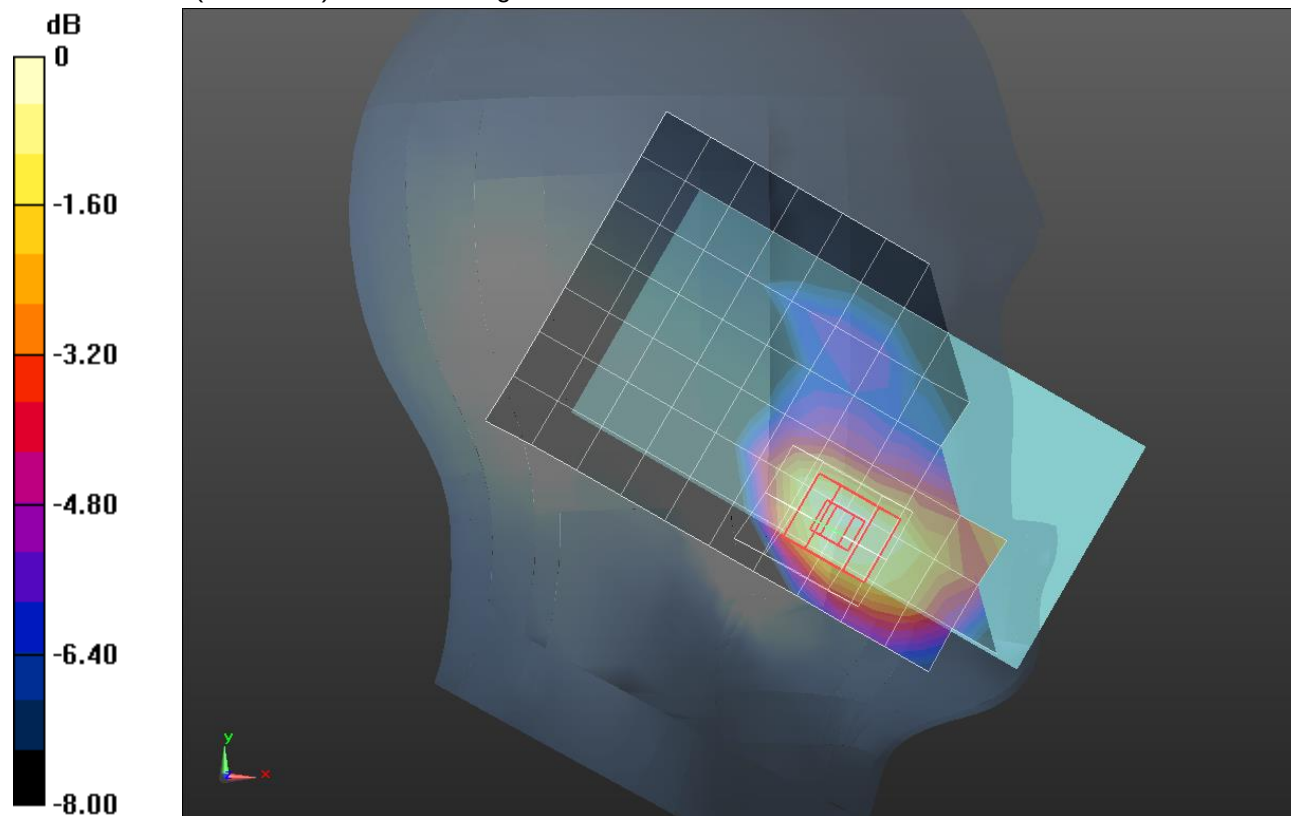

0 dB = 0.0978 W/kg = -10.10 dBW/kg

GSM 1900_Body_0628

Frequency: 1909.8 MHz; Duty Cycle: 1:1.99986; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.581$ S/m; $\epsilon_r = 53.257$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(7.82, 7.82, 7.82); Calibrated: 2015-02-12;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx

Rear/GPRS 4 slots_ch 810 10mm/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.40 W/kg


Rear/GPRS 4 slots_ch 810 10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.91 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

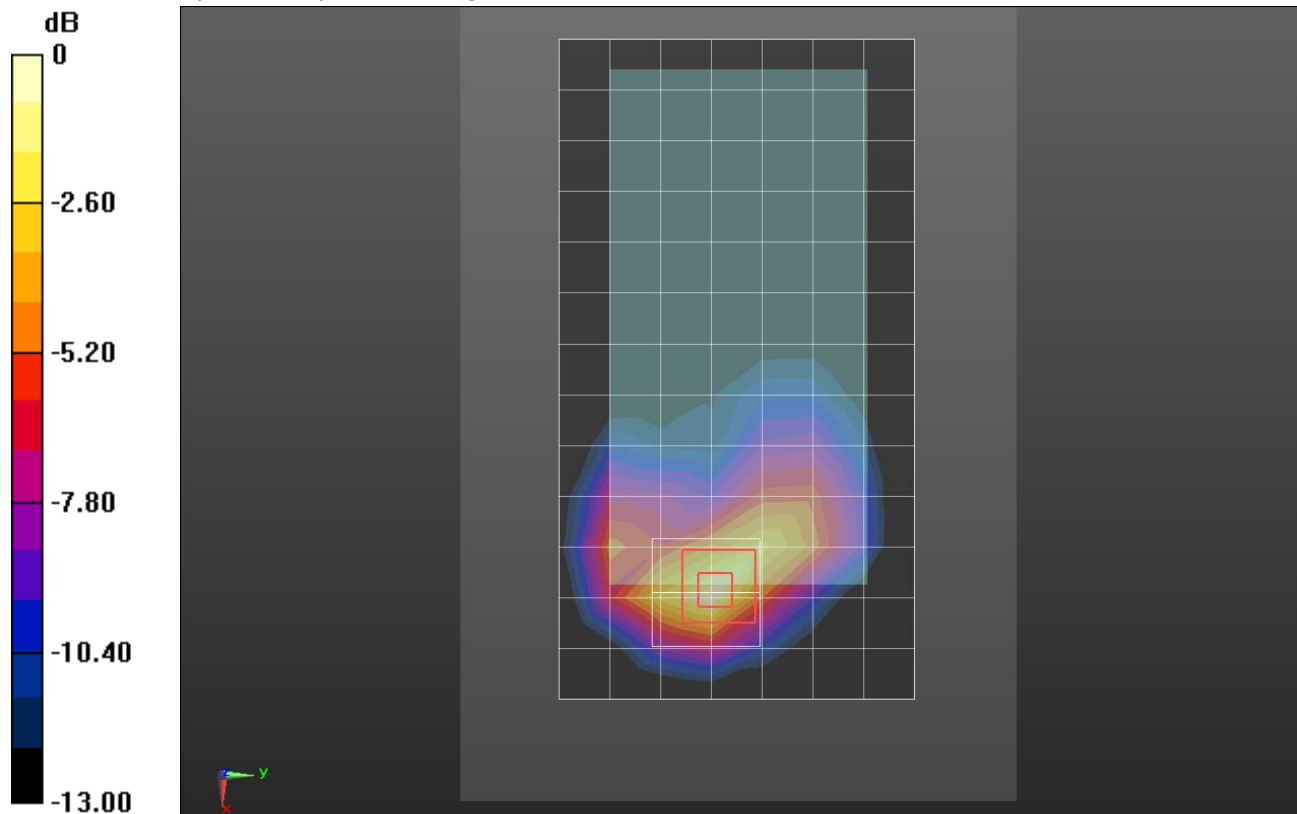

0 dB = 1.39 W/kg = 1.43 dBW/kg

WCDMA Band V_Head_0628

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.22$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(9.73, 9.73, 9.73); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1846

RHS/Touch_RMC Rel .99_ch 4183/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0759 W/kg


RHS/Touch_RMC Rel .99_ch 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.261 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0762 W/kg

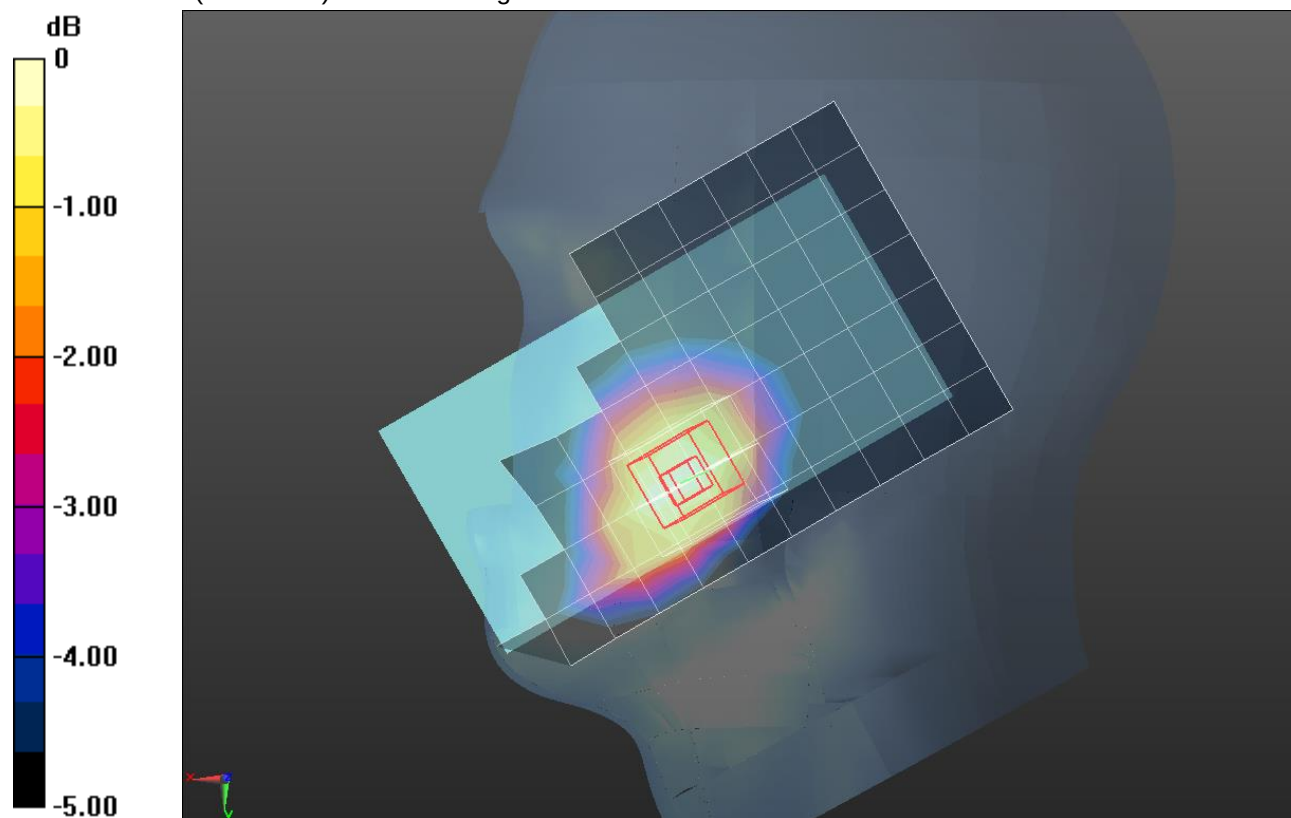

WCDMA Band V_Body_0628

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 53.286$; $\rho = 1000$ kg/m³


DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(9.35, 9.35, 9.35); Calibrated: 2015-02-12;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx

Rear/Rel.99 RMC ch_4183 10mm/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.352 W/kg

Rear/Rel.99 RMC ch_4183 10mm/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 18.90 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.453 W/kg
SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.154 W/kg
 Maximum value of SAR (measured) = 0.347 W/kg

Rear/Rel.99 RMC ch_4183 10mm/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 18.90 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.331 W/kg
SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.161 W/kg
 Maximum value of SAR (measured) = 0.282 W/kg

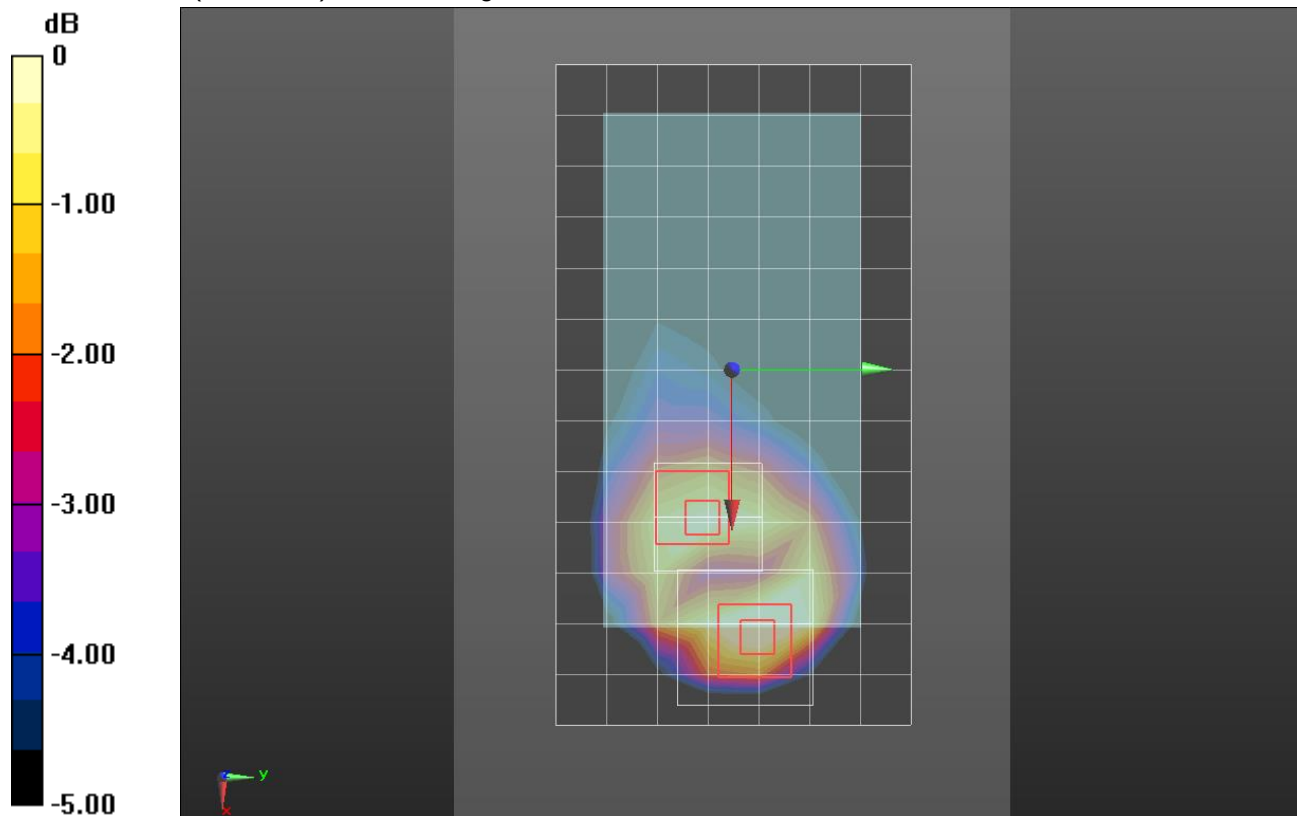

0 dB = 0.282 W/kg = -5.50 dBW/kg

WCDMA Band II_Head_0627

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 38.477$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(7.87, 7.87, 7.87); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

LHS/Touch_RMC Rel .99_ch 9400/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0598 W/kg


LHS/Touch_RMC Rel .99_ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.377 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0574 W/kg

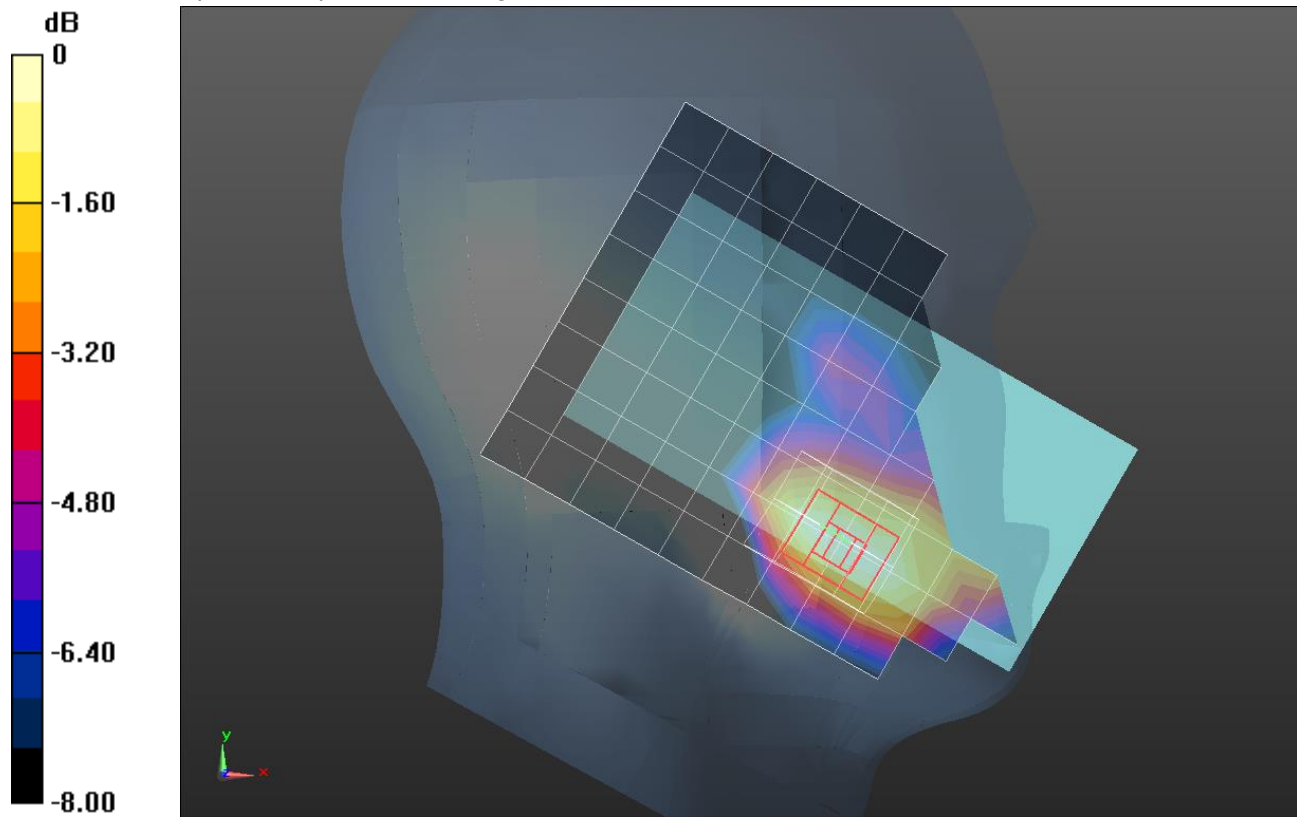

0 dB = 0.0574 W/kg = -12.41 dBW/kg

WCDMA Band II_150702

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.562$ S/m; $\epsilon_r = 53.964$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(7.77, 7.77, 7.77); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2001

Front/Rel.99 RMC ch_9400 15mm 2/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.455 W/kg


Front/Rel.99 RMC ch_9400 15mm 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.40 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.538 W/kg

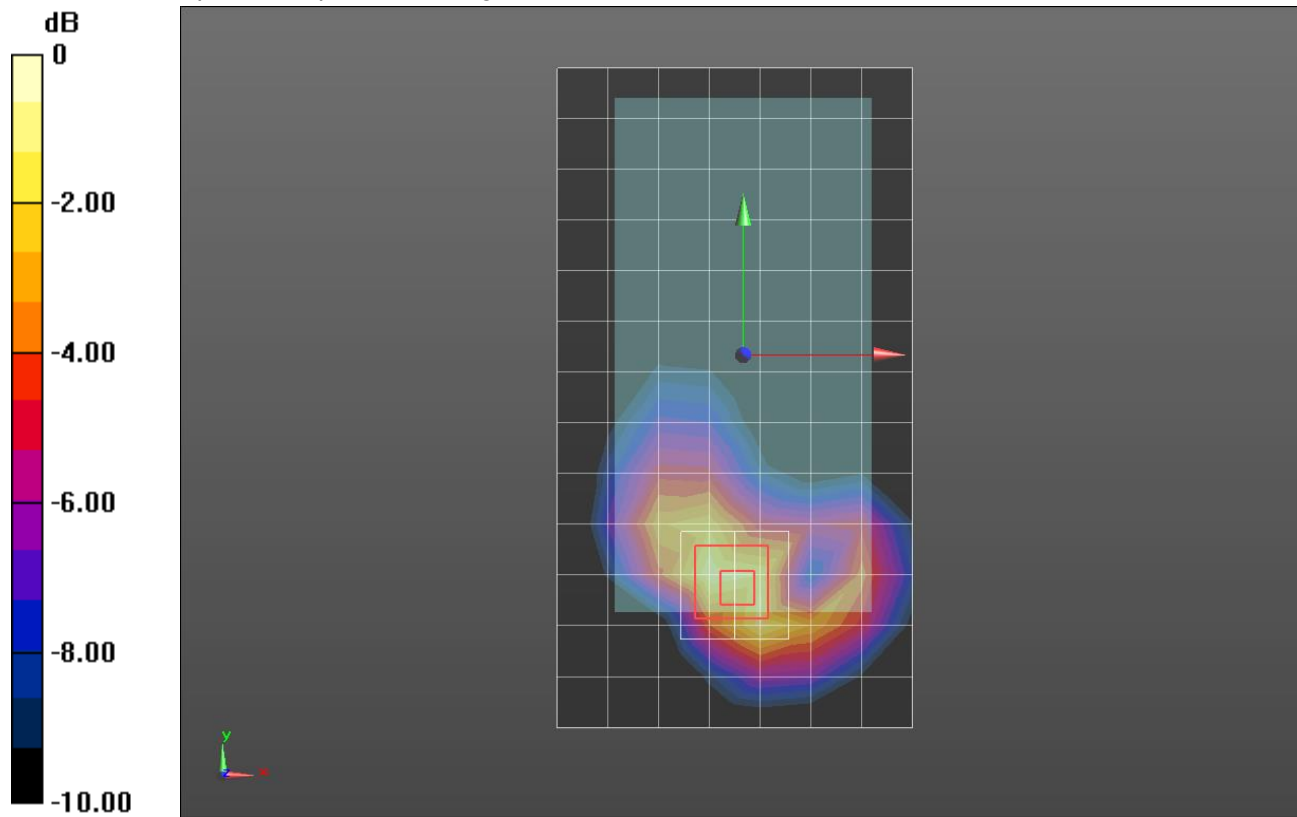

0 dB = 0.538 W/kg = -2.69 dBW/kg

LTE Band 4_Head_0627

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.303$ S/m; $\epsilon_r = 38.968$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(8.14, 8.14, 8.14); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

LHS/Touch_QPSK 1/0 ch 20175/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.131 W/kg


LHS/Touch_QPSK 1/0 ch 20175/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.31 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

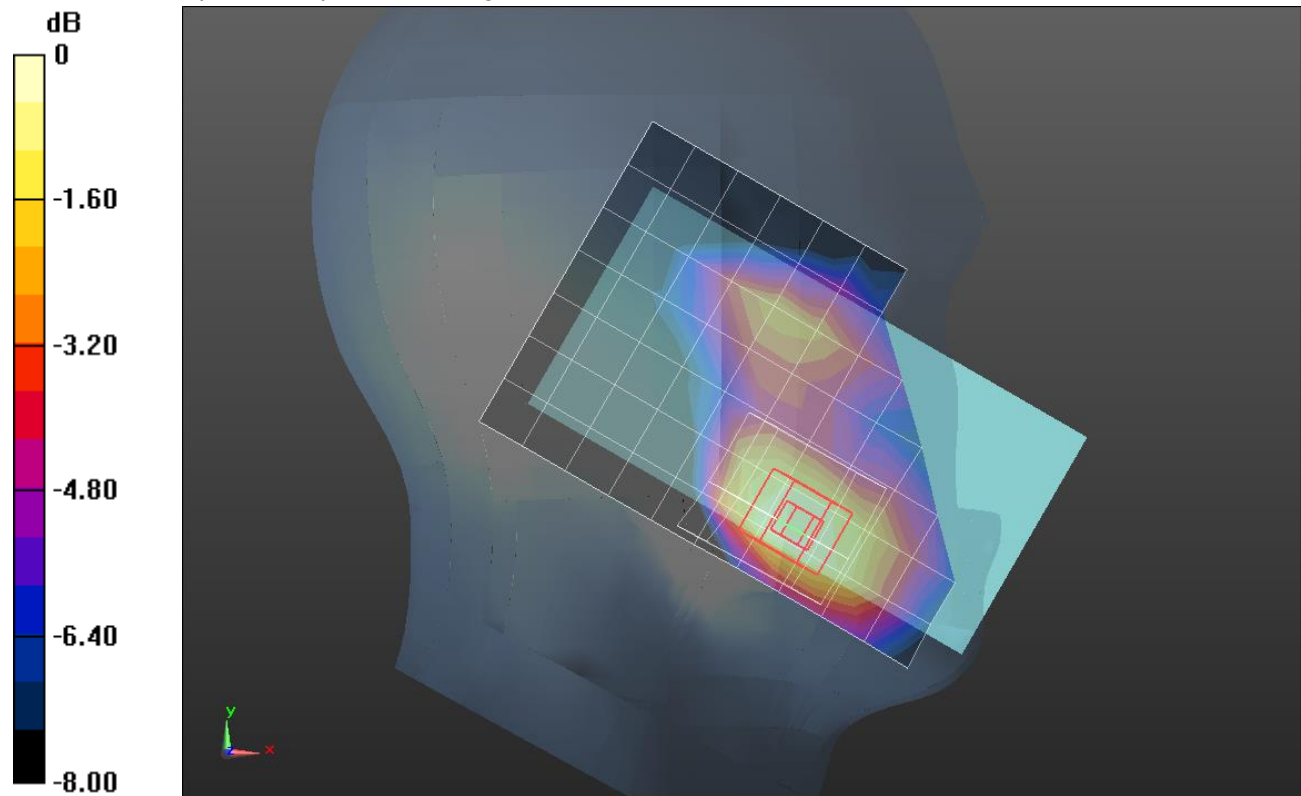

0 dB = 0.144 W/kg = -8.42 dBW/kg

LTE Band 4_Body_0710

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 54.622$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(8.19, 8.19, 8.19); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2001

Rear/QPSK RB 1/0 ch 20175 10mm 2/Area Scan (15x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.861 W/kg


Rear/QPSK RB 1/0 ch 20175 10mm 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.32 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 0.985 W/kg

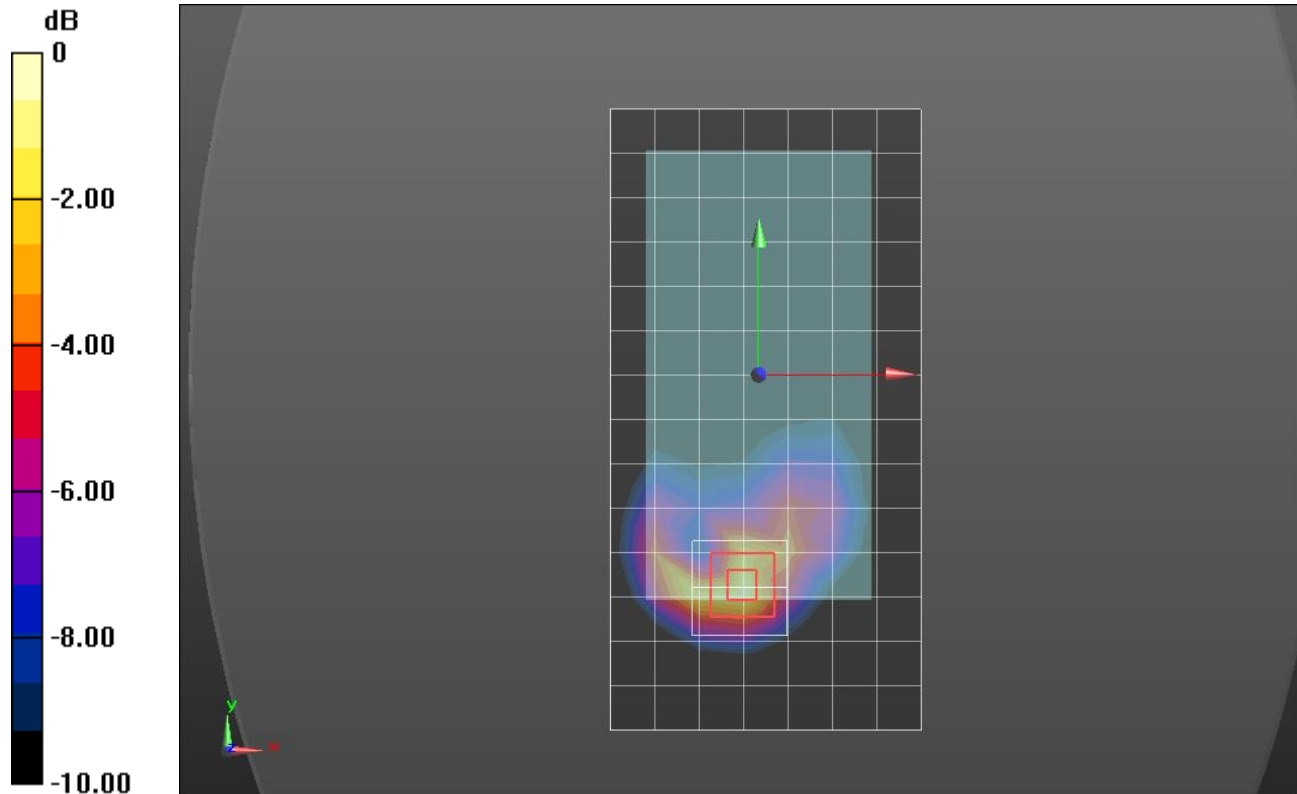

0 dB = 0.985 W/kg = -0.07 dBW/kg

LTE Band 12_Head_0706

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 42.113$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(10.68, 10.68, 10.68); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1855

RHS/Touch_QPSK RB 1/25 ch 23095/Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0449 W/kg


RHS/Touch_QPSK RB 1/25 ch 23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.384 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0462 W/kg

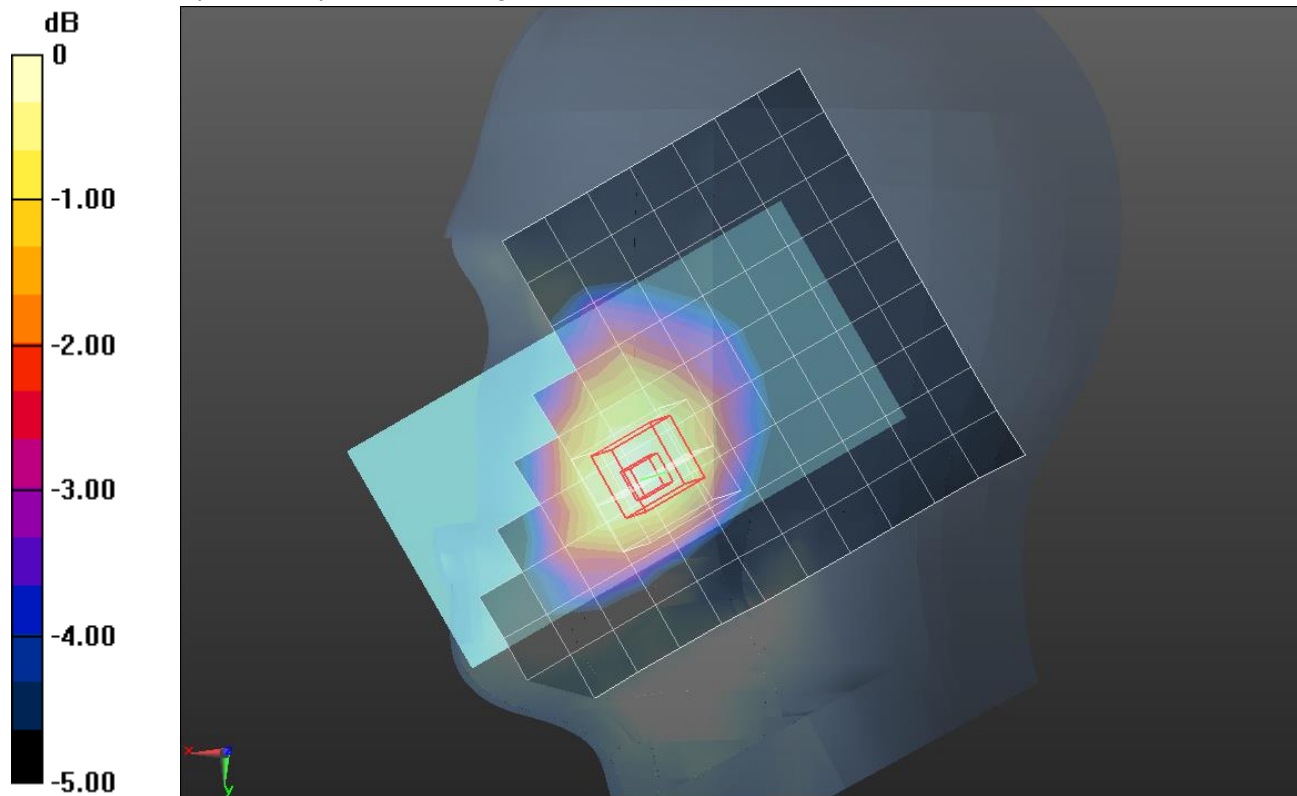

0 dB = 0.0462 W/kg = -13.35 dBW/kg

LTE Band 12_Body

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 54.567$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(9.65, 9.65, 9.65); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1166

Rear/QPSK RB 1/25 ch 23095/Area Scan (14x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.228 W/kg

Rear/QPSK RB 1/25 ch 23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.98 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.246 W/kg


Rear/QPSK RB 1/25 ch 23095/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.98 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

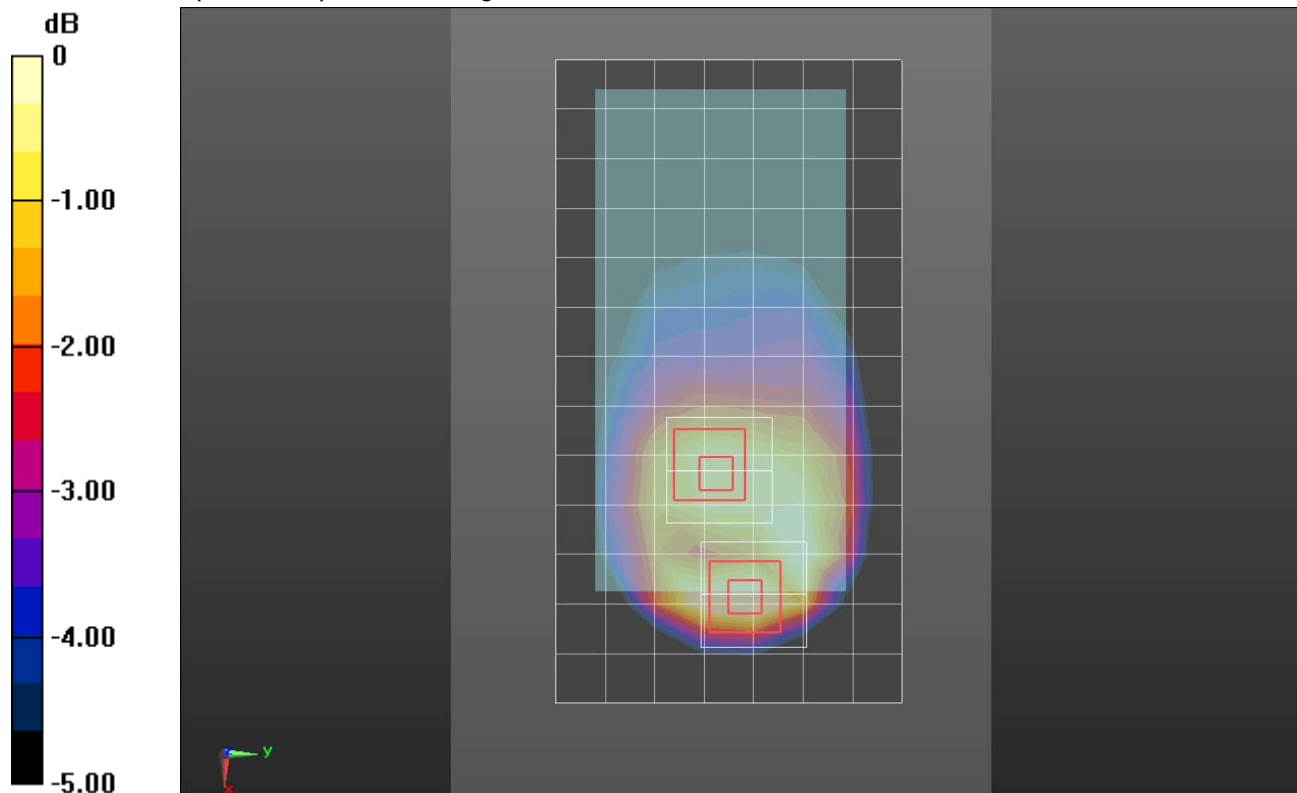

0 dB = 0.184 W/kg = -7.35 dBW/kg

LTE Band 25_Head_0627

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 38.466$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(7.87, 7.87, 7.87); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

LHS/Touch_QPSK 1/0 ch 26365/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0625 W/kg


LHS/Touch_QPSK 1/0 ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.527 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0657 W/kg

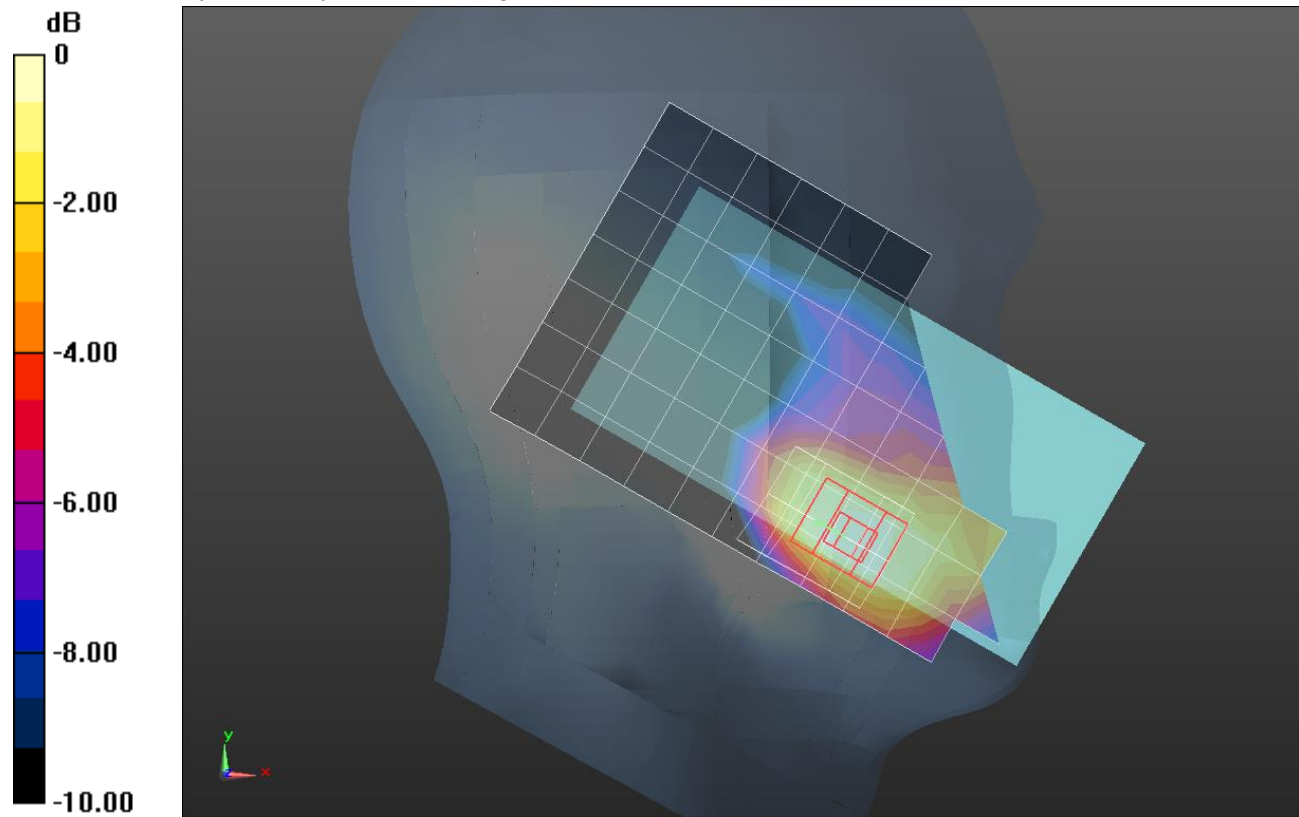

0 dB = 0.0657 W/kg = -11.82 dBW/kg

LTE Band 25_Body_SAR_0710

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.565$ S/m; $\epsilon_r = 53.958$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(7.77, 7.77, 7.77); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2001

Rear (Reduction)/QPSK RB 1/0 ch 26365 10mm/Area Scan (14x8x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.718 W/kg

Rear (Reduction)/QPSK RB 1/0 ch 26365 10mm/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.16 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.964 W/kg

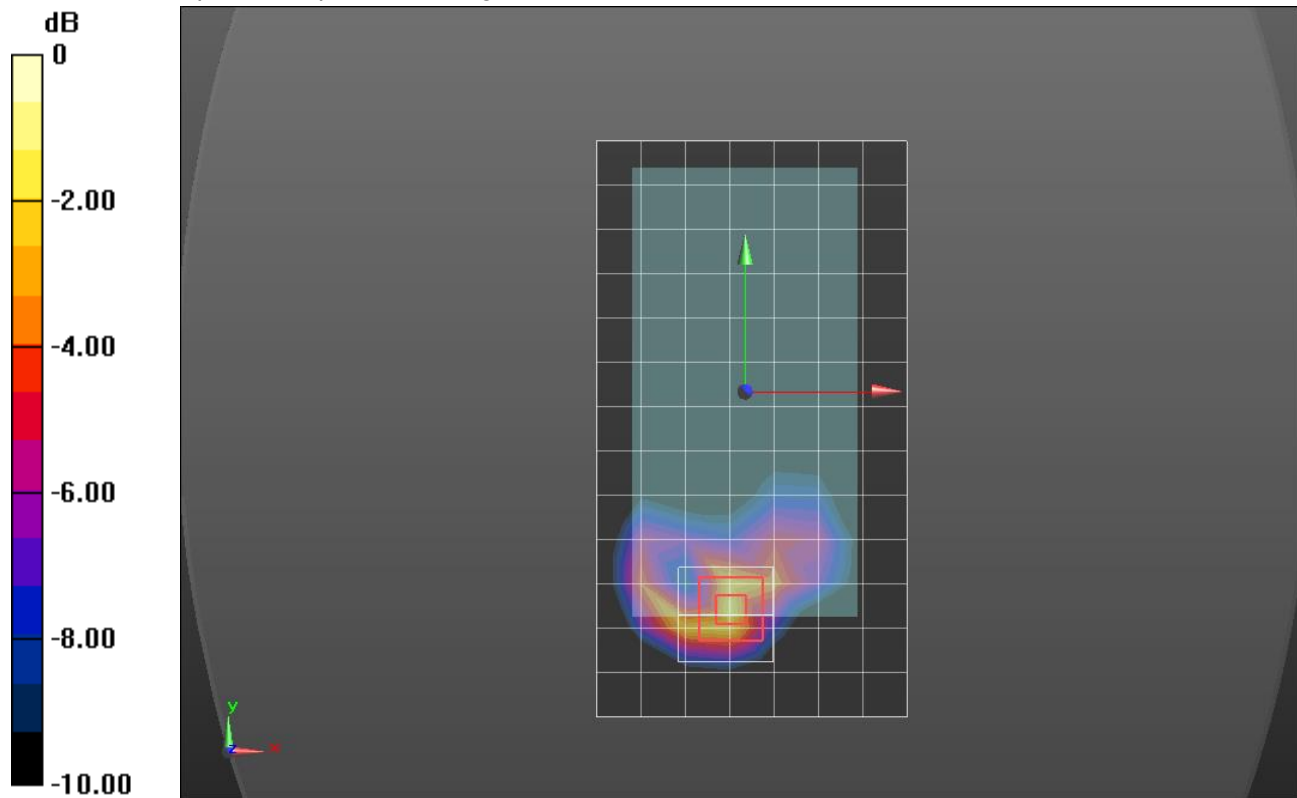

0 dB = 0.964 W/kg = -0.16 dBW/kg

LTE Band 26_Head_0706

Frequency: 831.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.262$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(9.73, 9.73, 9.73); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1846

RHS/Touch_QPSK 1/0 ch 26865/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0520 W/kg


RHS/Touch_QPSK 1/0 ch 26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.411 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0495 W/kg

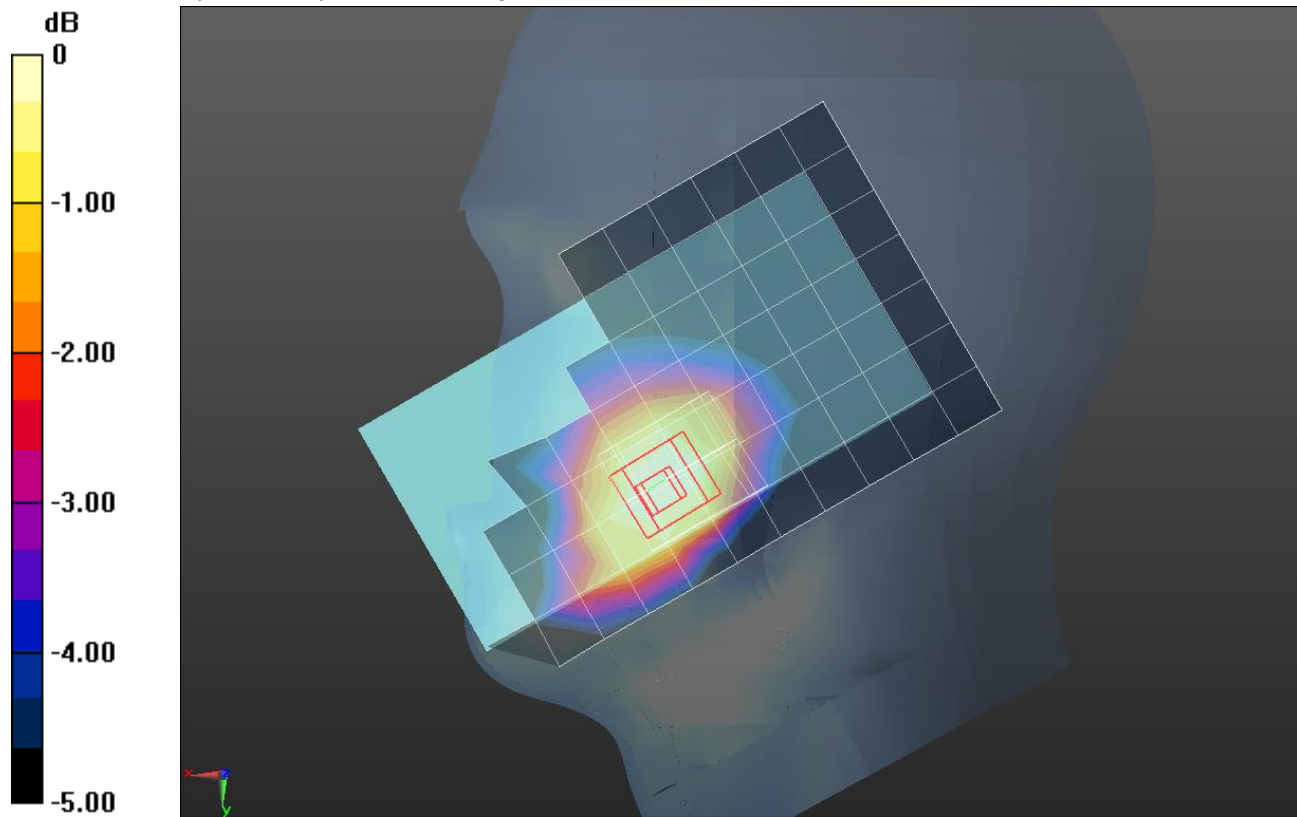

0 dB = 0.0495 W/kg = -13.05 dBW/kg

LTE Band 26_0627

Frequency: 831.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 1.012$ S/m; $\epsilon_r = 53.655$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(10.19, 10.19, 10.19); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1167

Rear/QPSK RB 1/0 ch 26965/Area Scan (14x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.269 W/kg

Rear/QPSK RB 1/0 ch 26965/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.66 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.272 W/kg


Rear/QPSK RB 1/0 ch 26965/Zoom Scan 2 (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.66 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

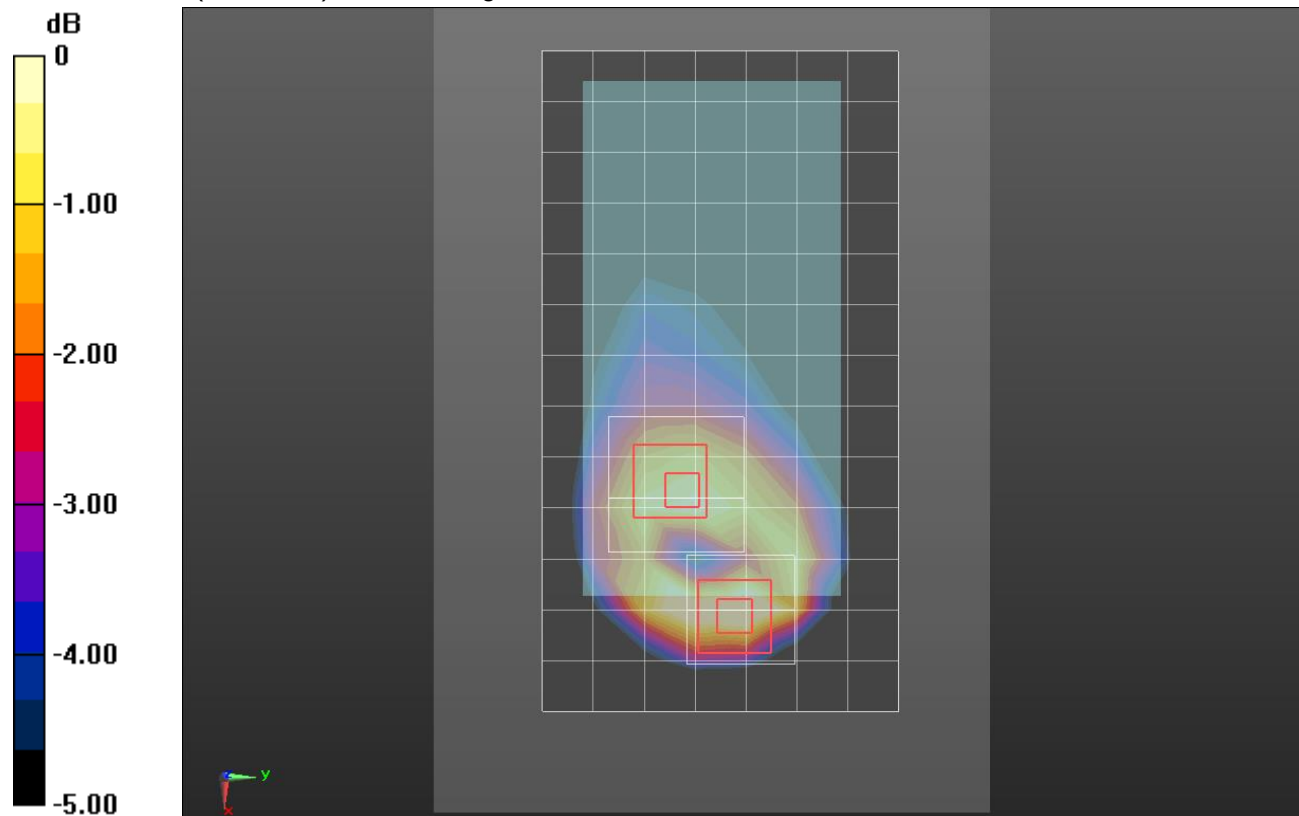

0 dB = 0.201 W/kg = -6.97 dBW/kg

LTE Band41_0702

Frequency: 2593 MHz; Duty Cycle: 1:1.59956; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 39.153$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(7.26, 7.26, 7.26); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:1854

LHS/Touch QPSK RB 1/0 ch 40620/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.226 W/kg


LHS/Touch QPSK RB 1/0 ch 40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.48 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

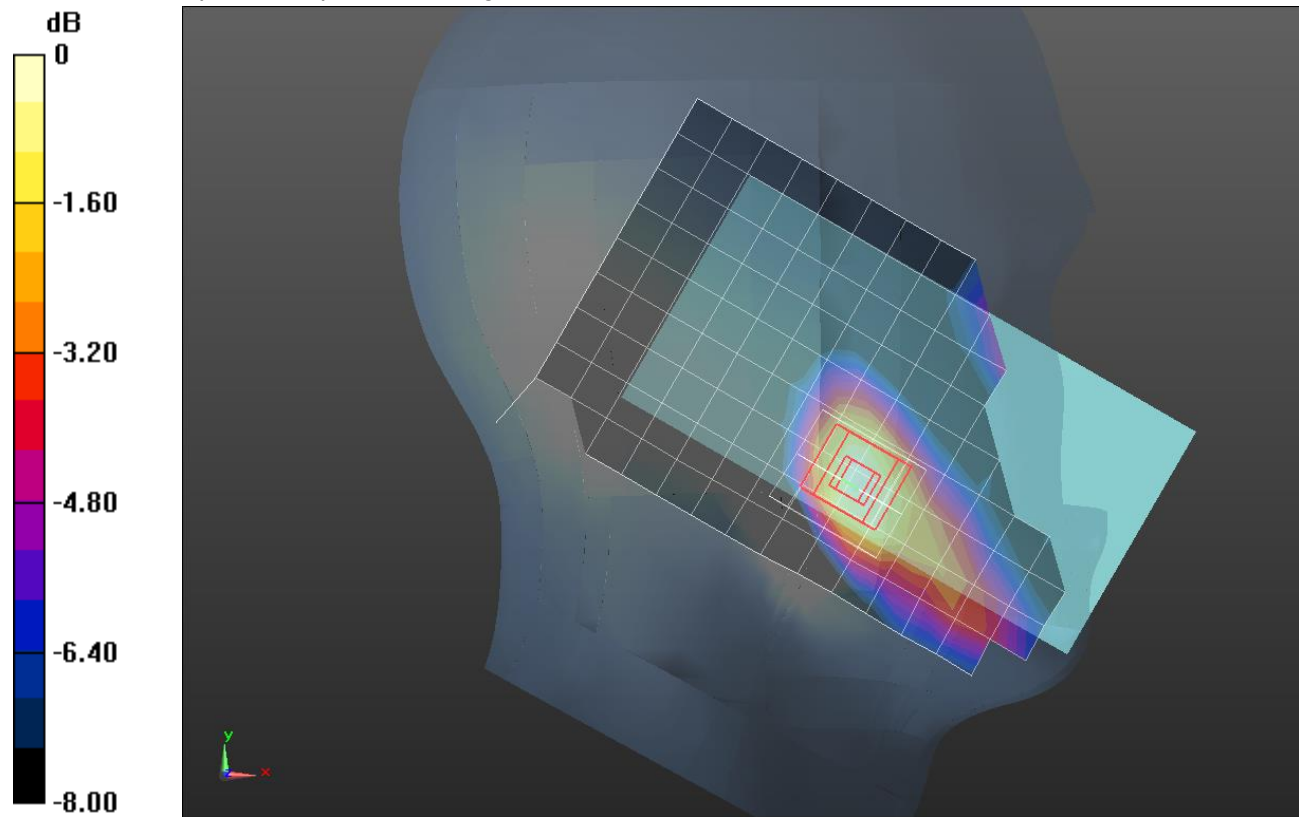

0 dB = 0.221 W/kg = -6.56 dBW/kg

LTE Band 41_0703

Frequency: 2549.5 MHz; Duty Cycle: 1:1.59956; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 2550$ MHz; $\sigma = 2.144$ S/m; $\epsilon_r = 51.419$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(7.05, 7.05, 7.05); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1167

Front/QPSK RB 1/0 ch. 40185/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.13 W/kg

Front/QPSK RB 1/0 ch. 40185/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.00 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.467 W/kg

Maximum value of SAR (measured) = 1.26 W/kg



Front/QPSK RB 1/0 ch. 40185/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.00 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.805 W/kg

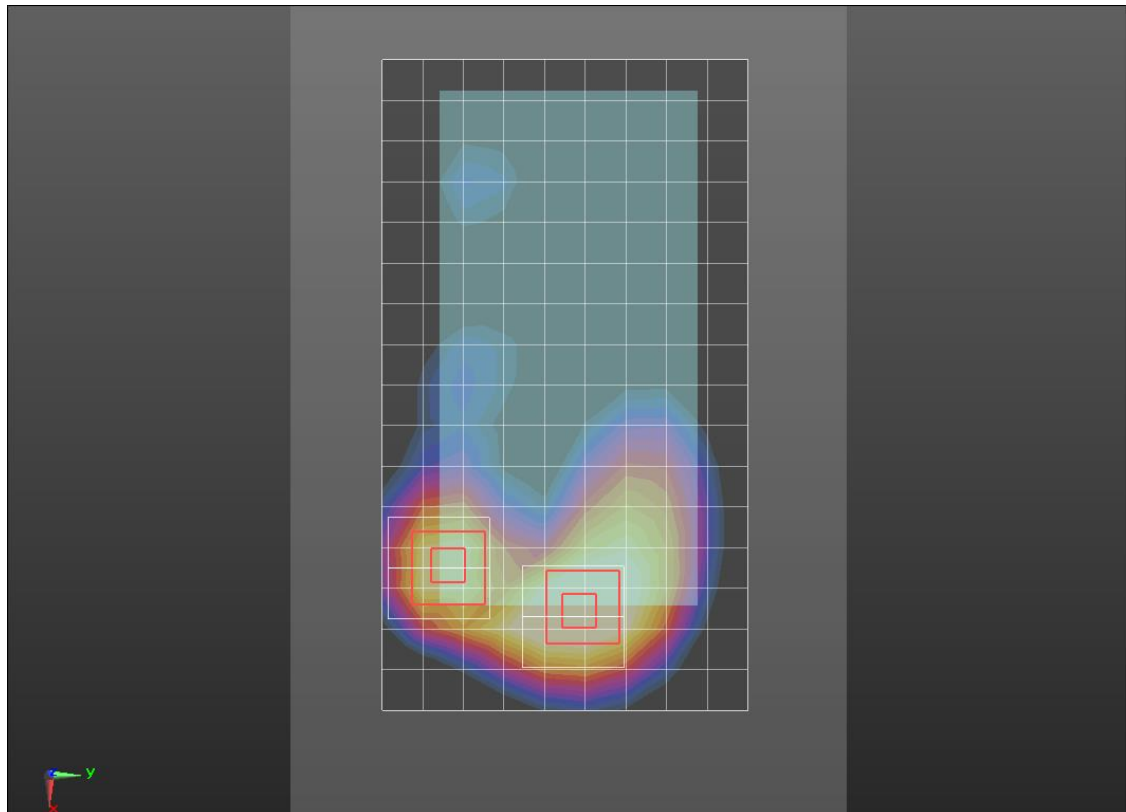

0 dB = 0.805 W/kg = -0.94 dBW/kg

Wi-Fi 2.4GHz_0710_2

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.837$ S/m; $\epsilon_r = 38.267$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(7.21, 7.21, 7.21); Calibrated: 2015-02-12;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Right); Type: QD000P40CD; Serial: TP:xxxx

RHS/Tilt_802.11b_ch 6 Chain 1/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.498 W/kg


RHS/Tilt_802.11b_ch 6 Chain 1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.24 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.480 W/kg

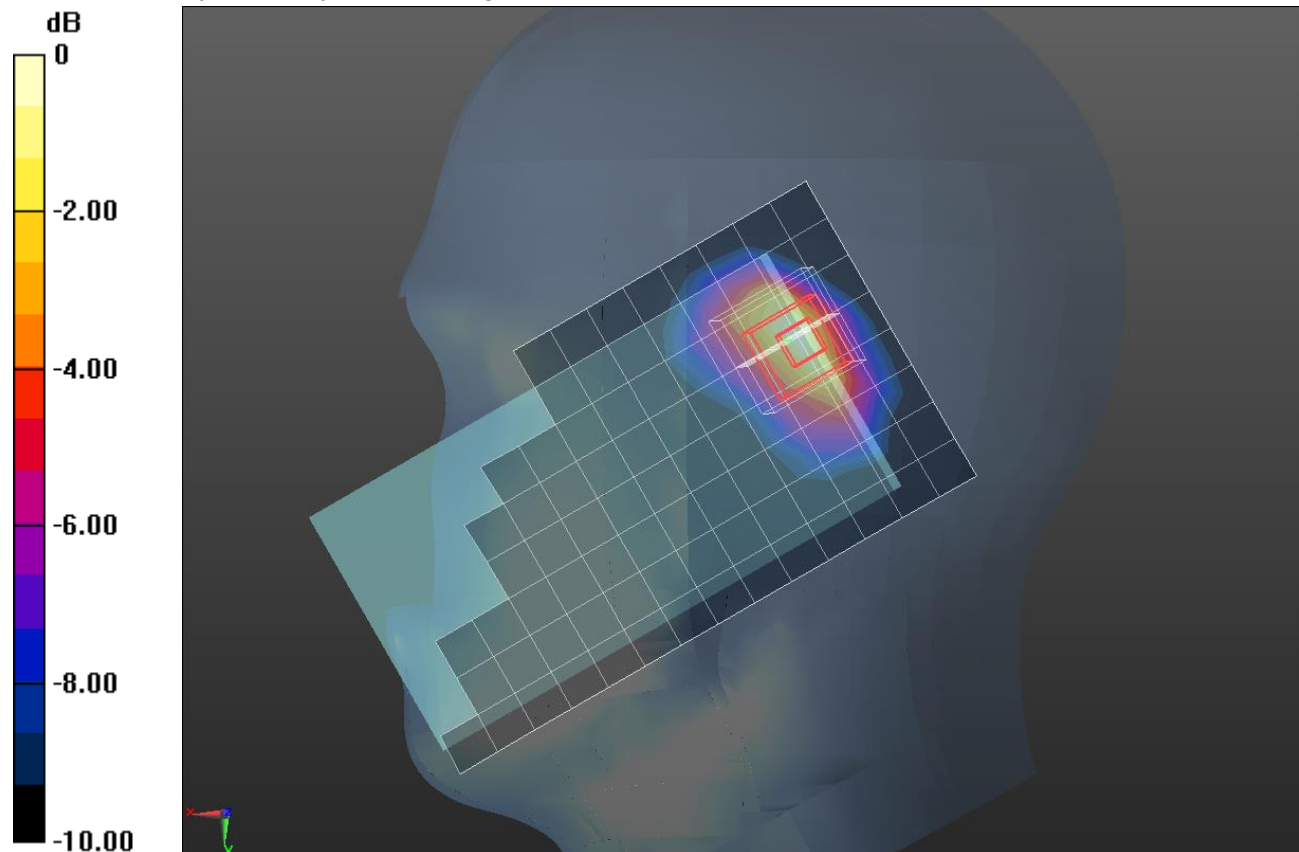

0 dB = 0.480 W/kg = -3.19 dBW/kg

Wi-Fi 2.4GHz_0710

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.009$ S/m; $\epsilon_r = 52.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7323; ConvF(7.3, 7.3, 7.3); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:2005

Edge 1/802.11b_ch 6 Chain 1/Area Scan (10x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.131 W/kg


Edge 1/802.11b_ch 6 Chain 1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.619 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

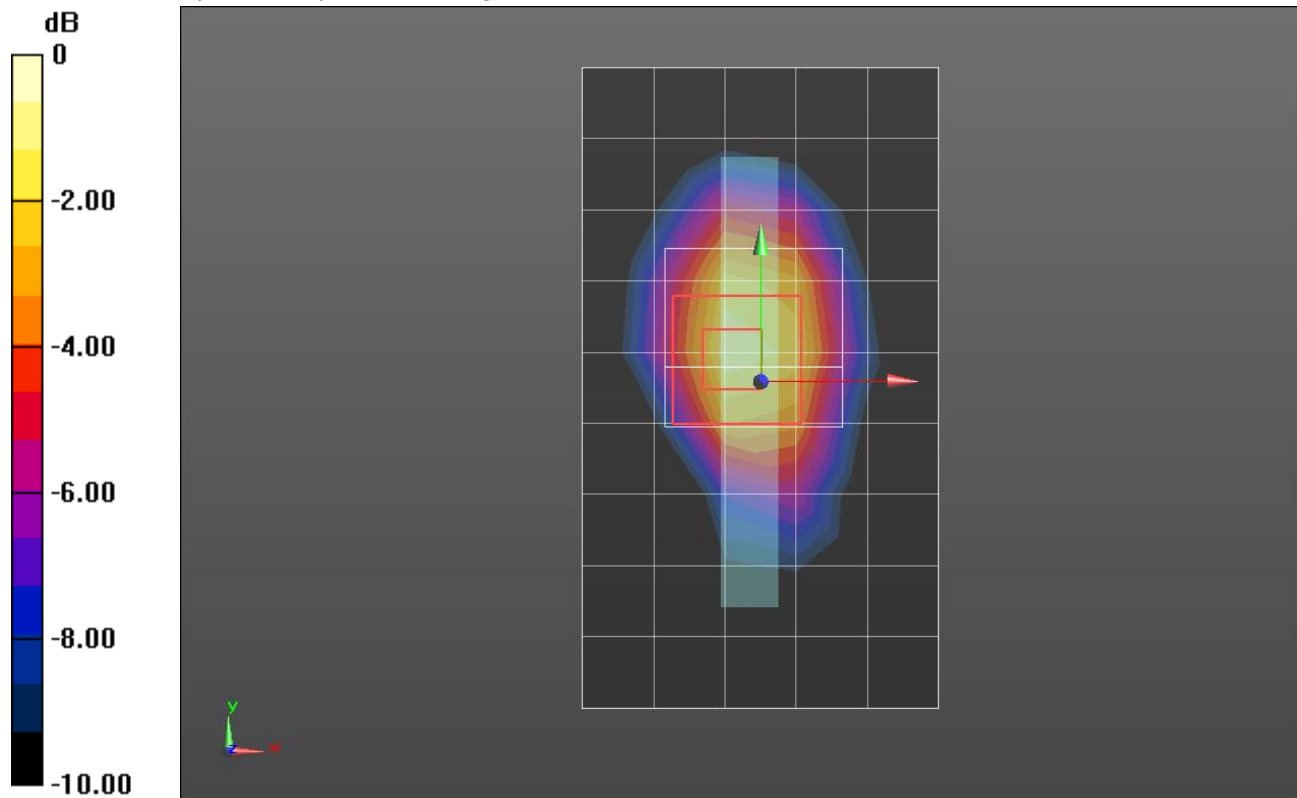

0 dB = 0.156 W/kg = -8.07 dBW/kg

Wi-Fi 5.3GHz_SISO

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.653$ S/m; $\epsilon_r = 36.254$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(5.11, 5.11, 5.11); Calibrated: 2015-07-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

RHS/Touch_802.11a_ch 52 chain 1/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.748 W/kg


RHS/Touch_802.11a_ch 52 chain 1/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.01 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.730 W/kg

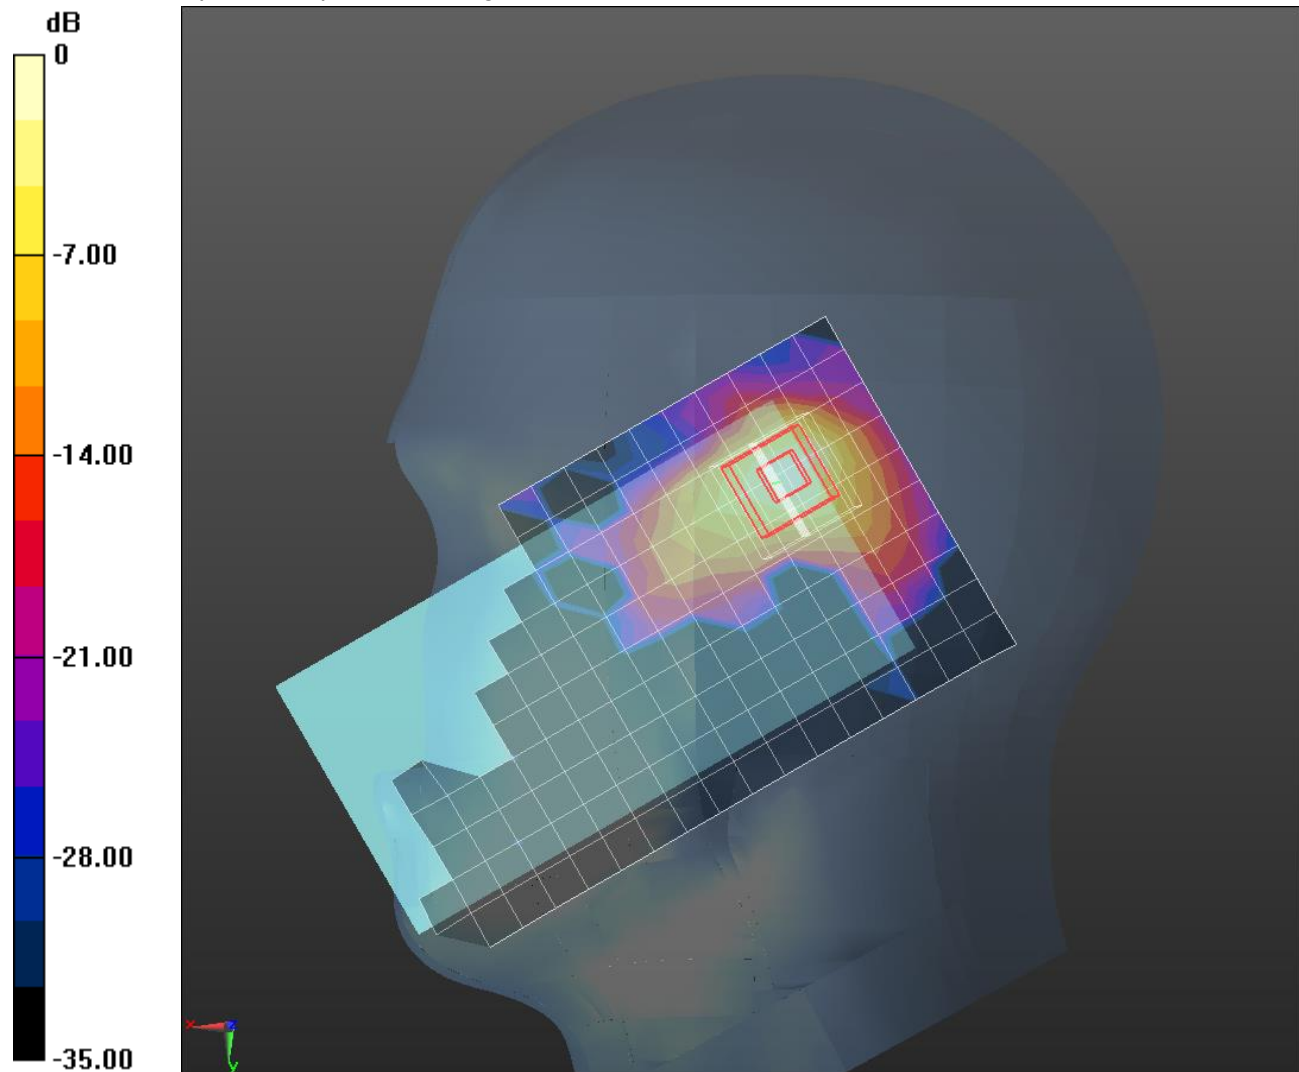

0 dB = 0.730 W/kg = -1.37 dBW/kg

Wi-Fi 5.3GHz_SISO

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.402$ S/m; $\epsilon_r = 47.181$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn614; Calibrated: 2014-09-18
- Probe: EX3DV4 - SN7314; ConvF(4.26, 4.26, 4.26); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1167

Front/802.11n_ch 52 Chain 1/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.106 W/kg


Front/802.11n_ch 52 Chain 1/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.224 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

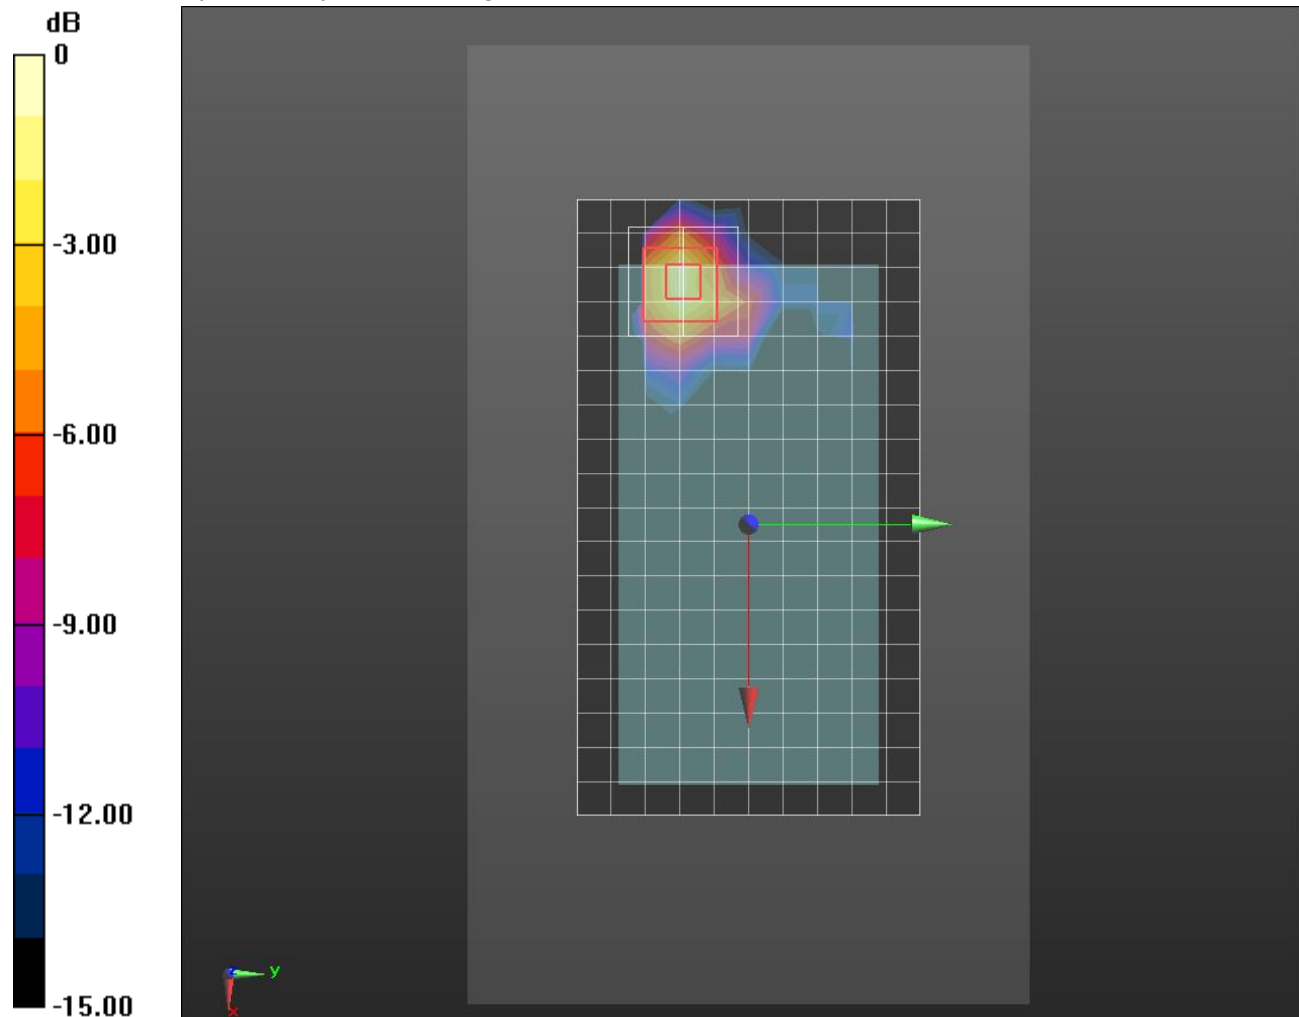

0 dB = 0.129 W/kg = -8.89 dBW/kg

Wi-Fi 5.5GHz_0808

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5520$ MHz; $\sigma = 4.876$ S/m; $\epsilon_r = 34.483$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(4.84, 4.84, 4.84); Calibrated: 2015-07-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

RHS/Tilt_802.11a_ch 104 Chain1/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.647 W/kg



RHS/Tilt_802.11a_ch 104 Chain1/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.33 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.871 W/kg

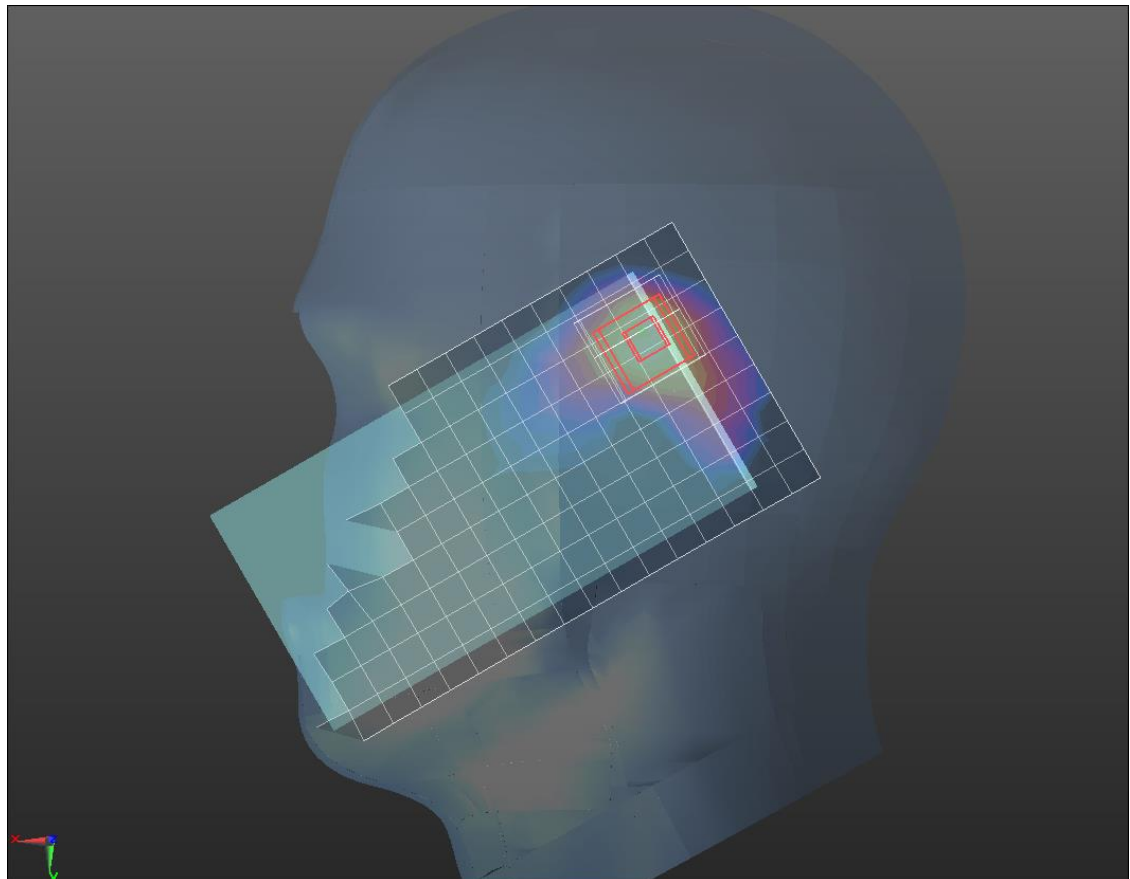

0 dB = 0.871 W/kg = -0.60 dBW/kg

Wi-Fi 5.5GHz_SISO

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.73$ S/m; $\epsilon_r = 46.769$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn614; Calibrated: 2014-09-18
- Probe: EX3DV4 - SN7314; ConvF(3.99, 3.99, 3.99); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1167

Front/802.11a_ch 104 Chain 1/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.217 W/kg


Front/802.11a_ch 104 Chain 1/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.578 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

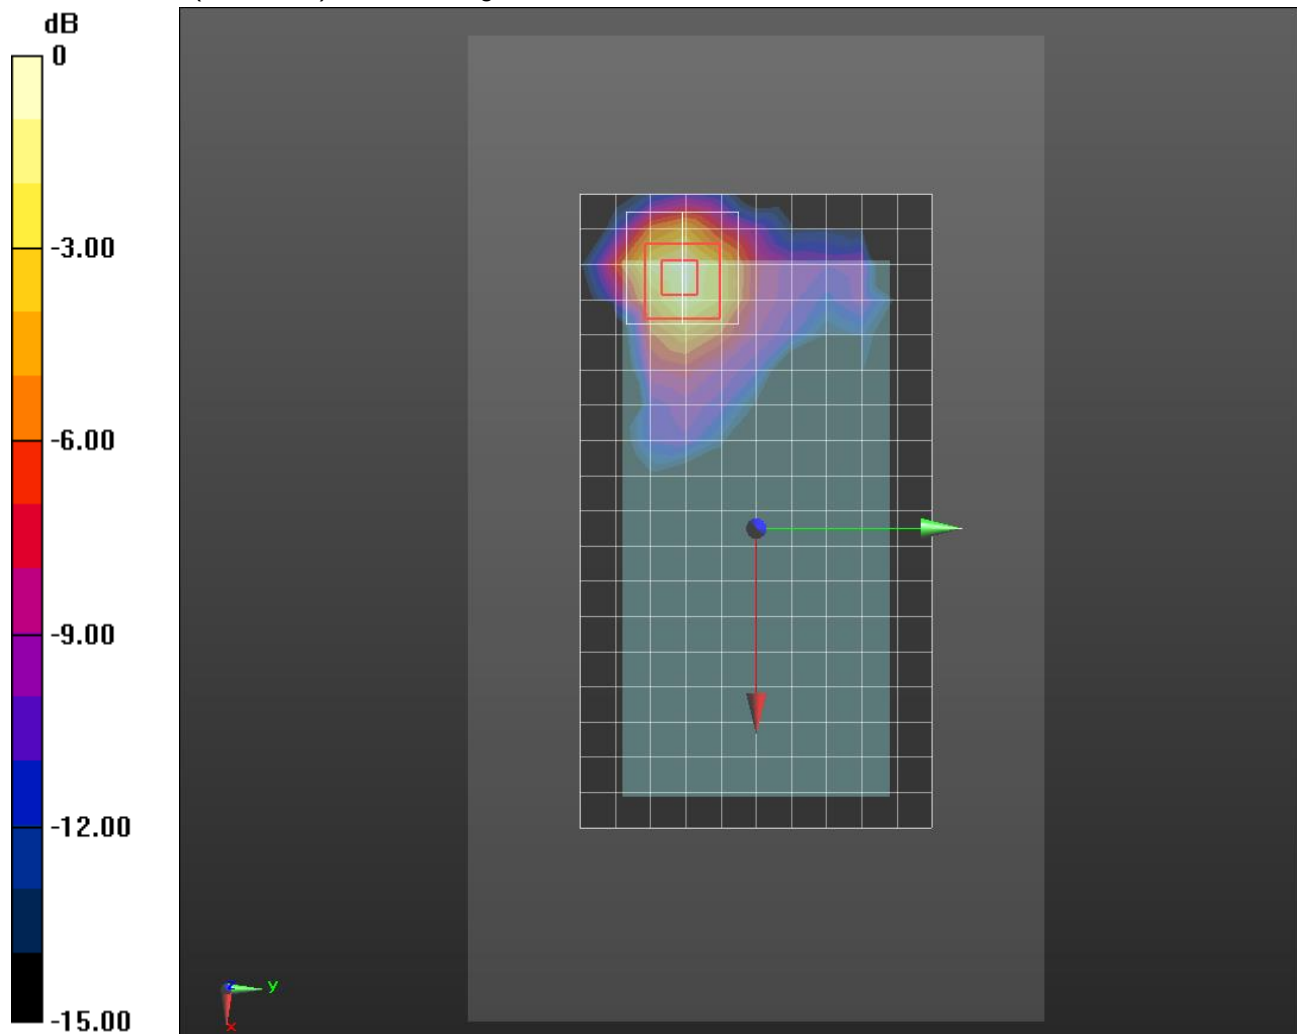

0 dB = 0.229 W/kg = -6.40 dBW/kg

Wi-Fi 5.8GHz_SISO

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.192$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(4.58, 4.58, 4.58); Calibrated: 2015-07-23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

RHS/Touch_802.11a_ch 149 Chain1 2/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.698 W/kg


RHS/Touch_802.11a_ch 149 Chain1 2/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.62 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.875 W/kg

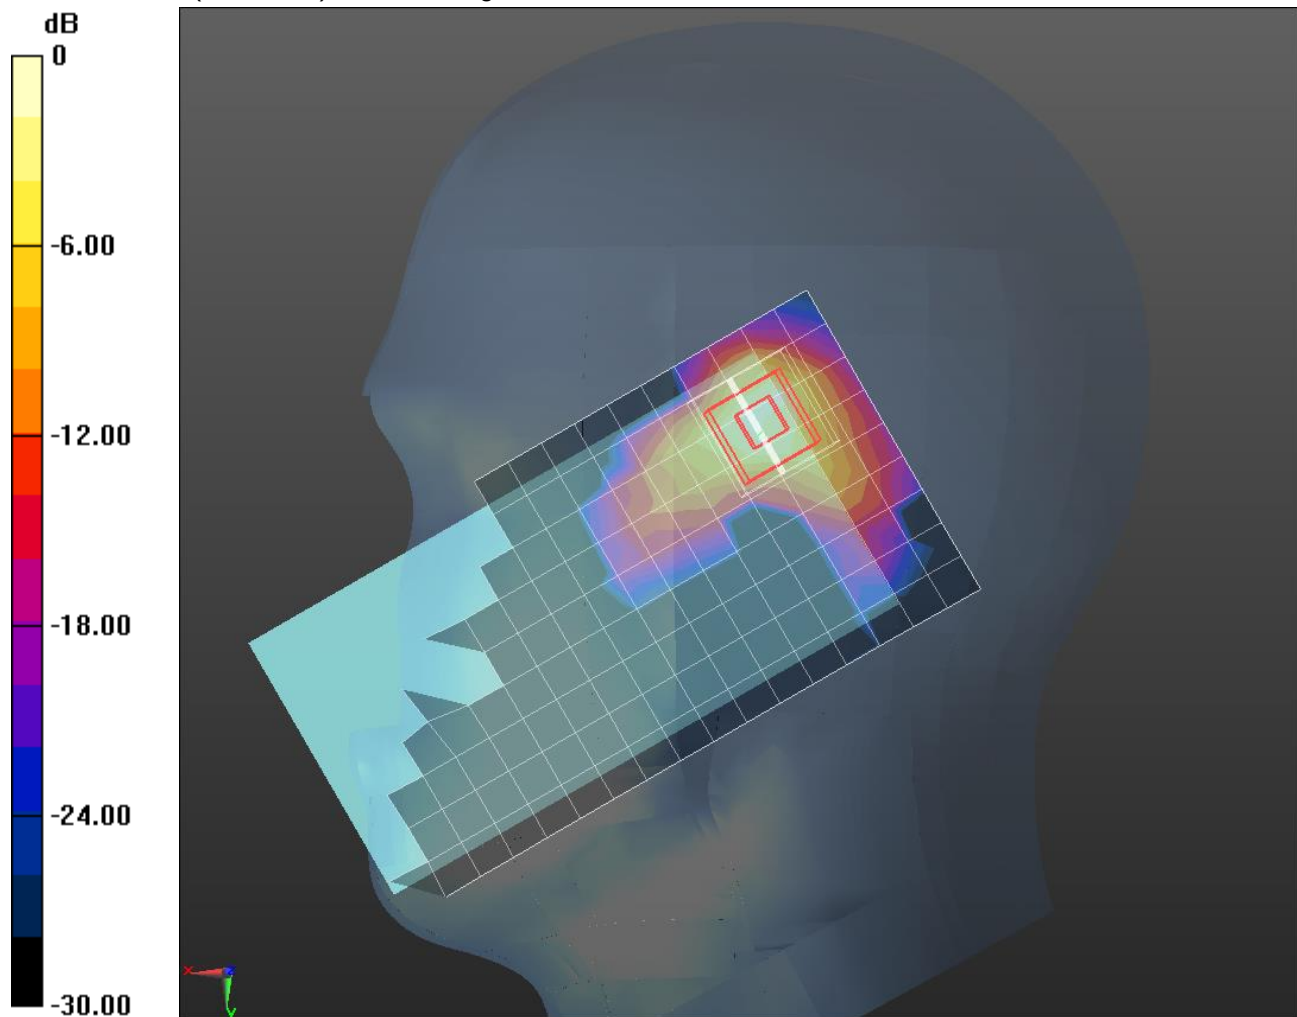

0 dB = 0.875 W/kg = -0.58 dBW/kg

Wi-Fi 5.8GHz_SISO

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.041$ S/m; $\epsilon_r = 46.452$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn614; Calibrated: 2014-09-18
- Probe: EX3DV4 - SN7314; ConvF(4.18, 4.18, 4.18); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1167

Front/802.11a_ch 149 Chain 1/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.0955 W/kg


Front/802.11a_ch 149 Chain 1/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.418 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

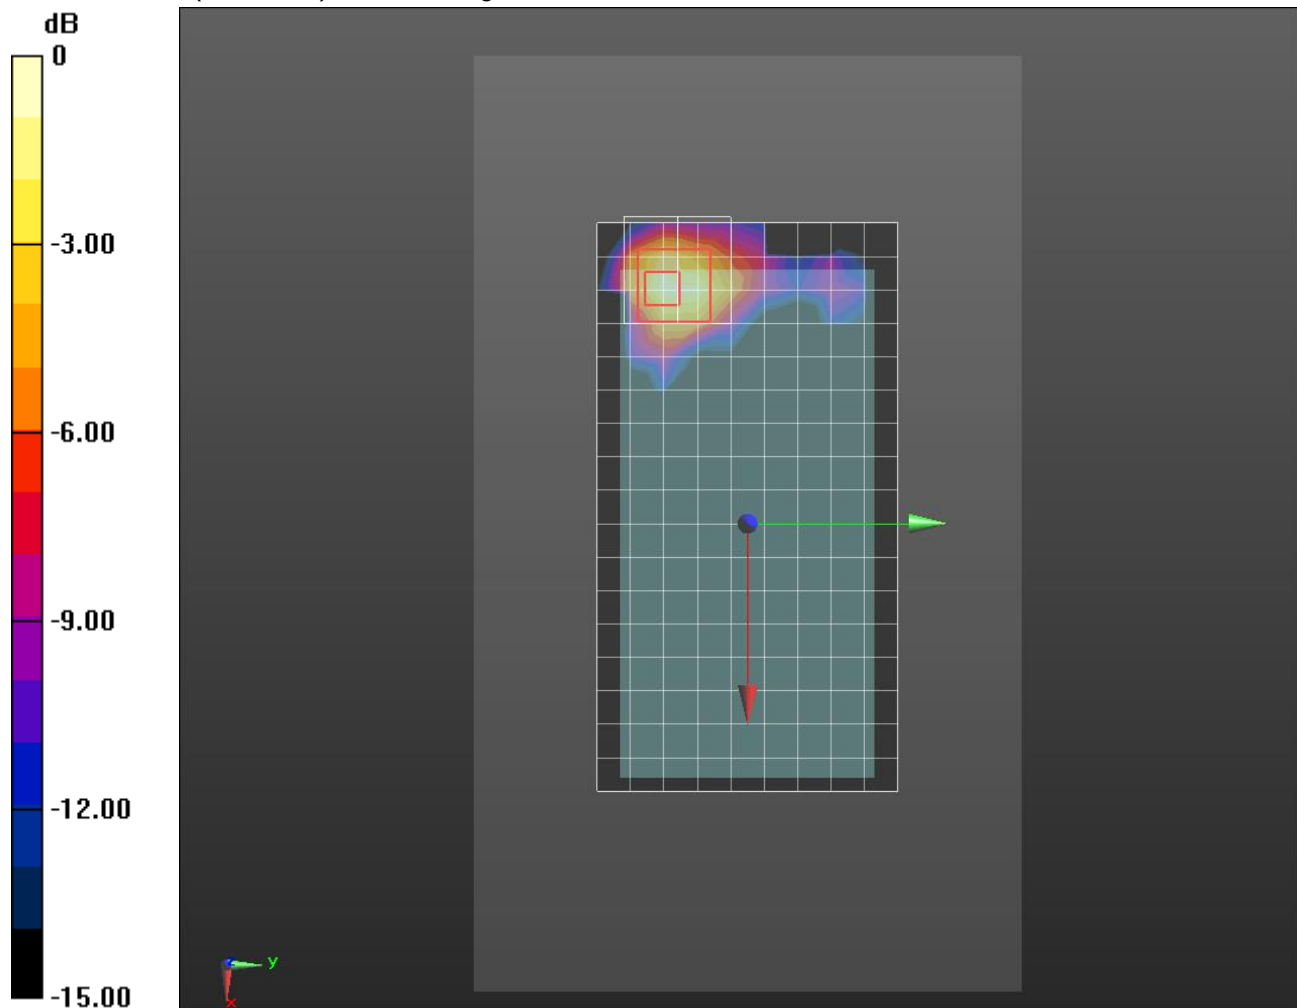

0 dB = 0.102 W/kg = -9.91 dBW/kg

Wi-Fi 5.3GHz_MIMO

Frequency: 5270 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.639$ S/m; $\epsilon_r = 34.822$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn614; Calibrated: 2014-09-18
- Probe: EX3DV4 - SN7314; ConvF(5.04, 5.04, 5.04); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1855

RHS/Touch_802.11n_ch 54/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.769 W/kg


RHS/Touch_802.11n_ch 54/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.63 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.897 W/kg

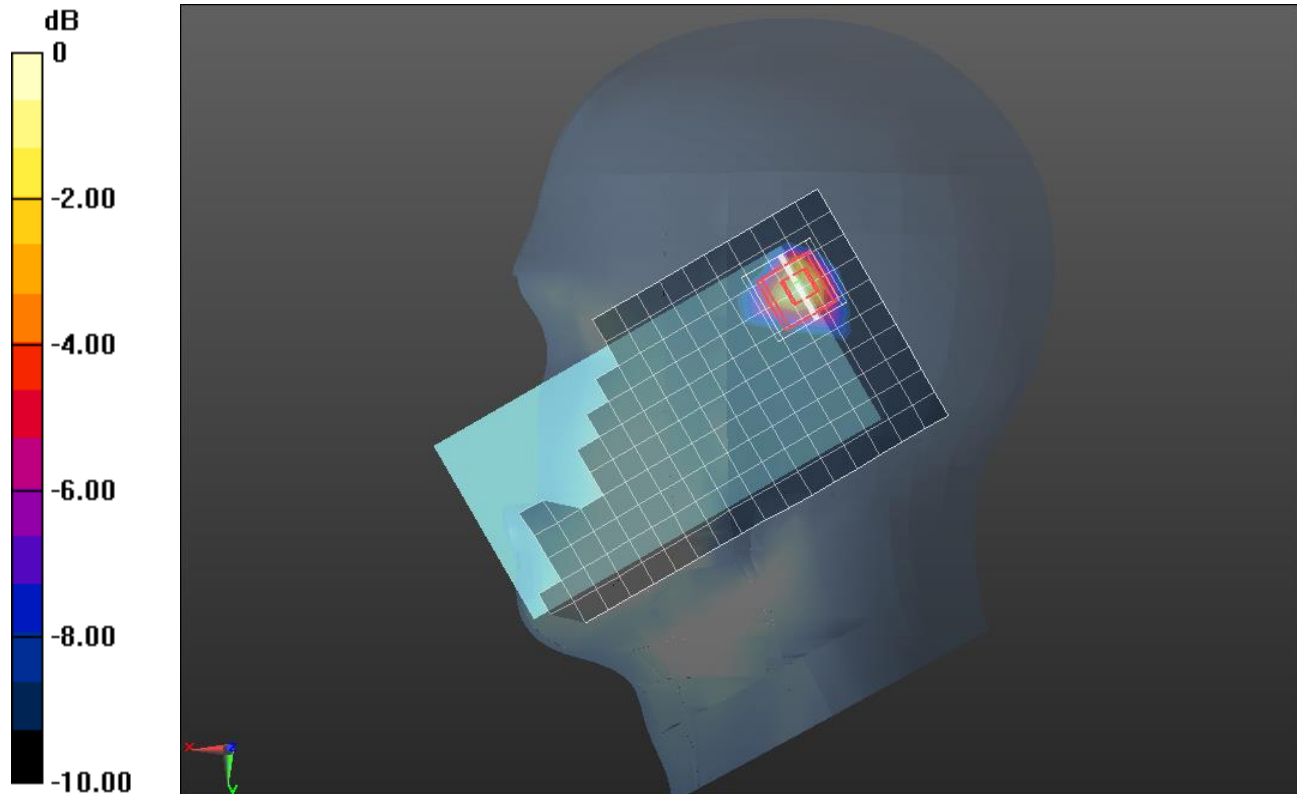

0 dB = 0.897 W/kg = -0.47 dBW/kg

Wi-Fi 5.3GHz_MIMO

Frequency: 5270 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 5270$ MHz; $\sigma = 5.326$ S/m; $\epsilon_r = 50.779$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(4.4, 4.4, 4.4); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1166

Front/802.11n_ch 54/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.124 W/kg


Front/802.11n_ch 54/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.237 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

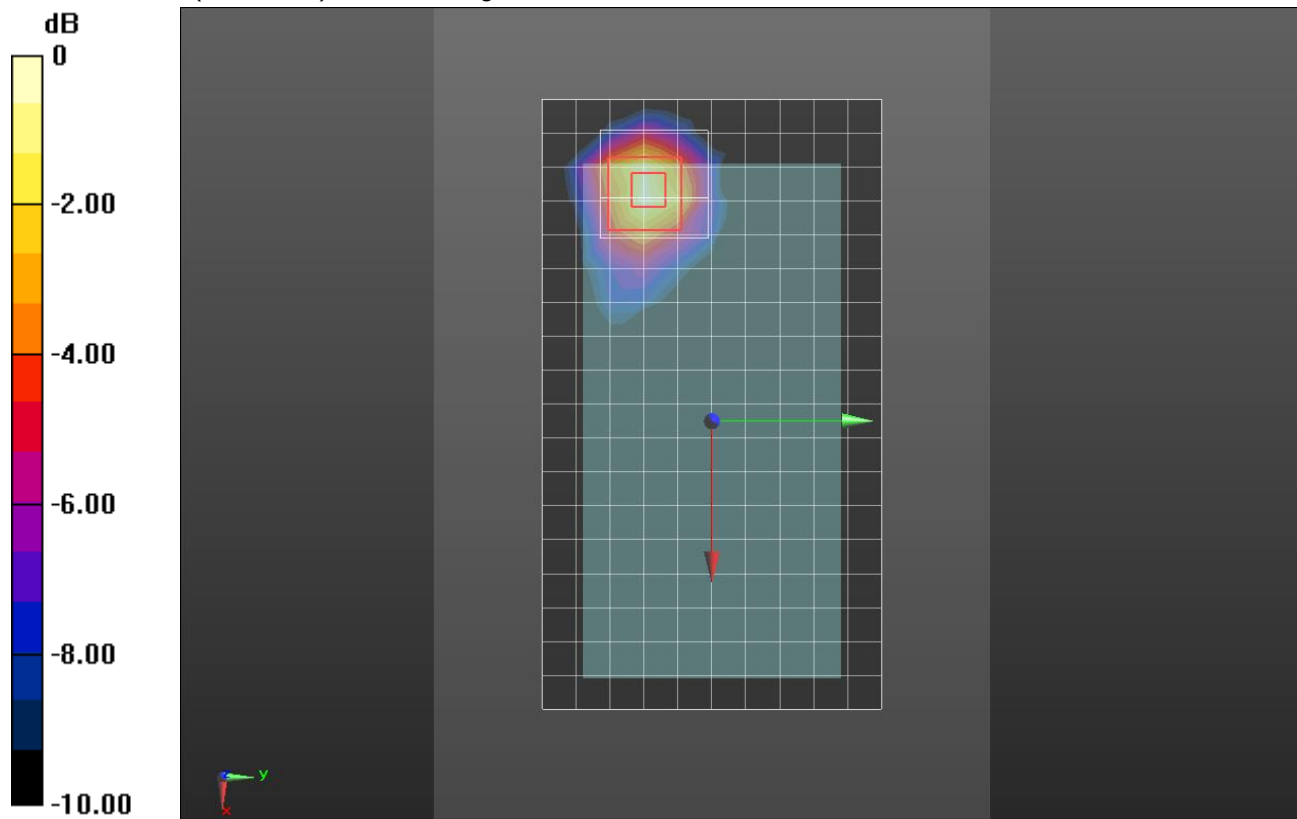

0 dB = 0.127 W/kg = -8.96 dBW/kg

Wi-Fi 5.5GHz_ MIMO

Frequency: 5510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 5510$ MHz; $\sigma = 4.867$ S/m; $\epsilon_r = 34.501$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn614; Calibrated: 2014-09-18
- Probe: EX3DV4 - SN7314; ConvF(4.84, 4.84, 4.84); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1855

RHS/Touch_802.11n_ch 102/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.04 W/kg


RHS/Touch_802.11n_ch 102/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.66 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

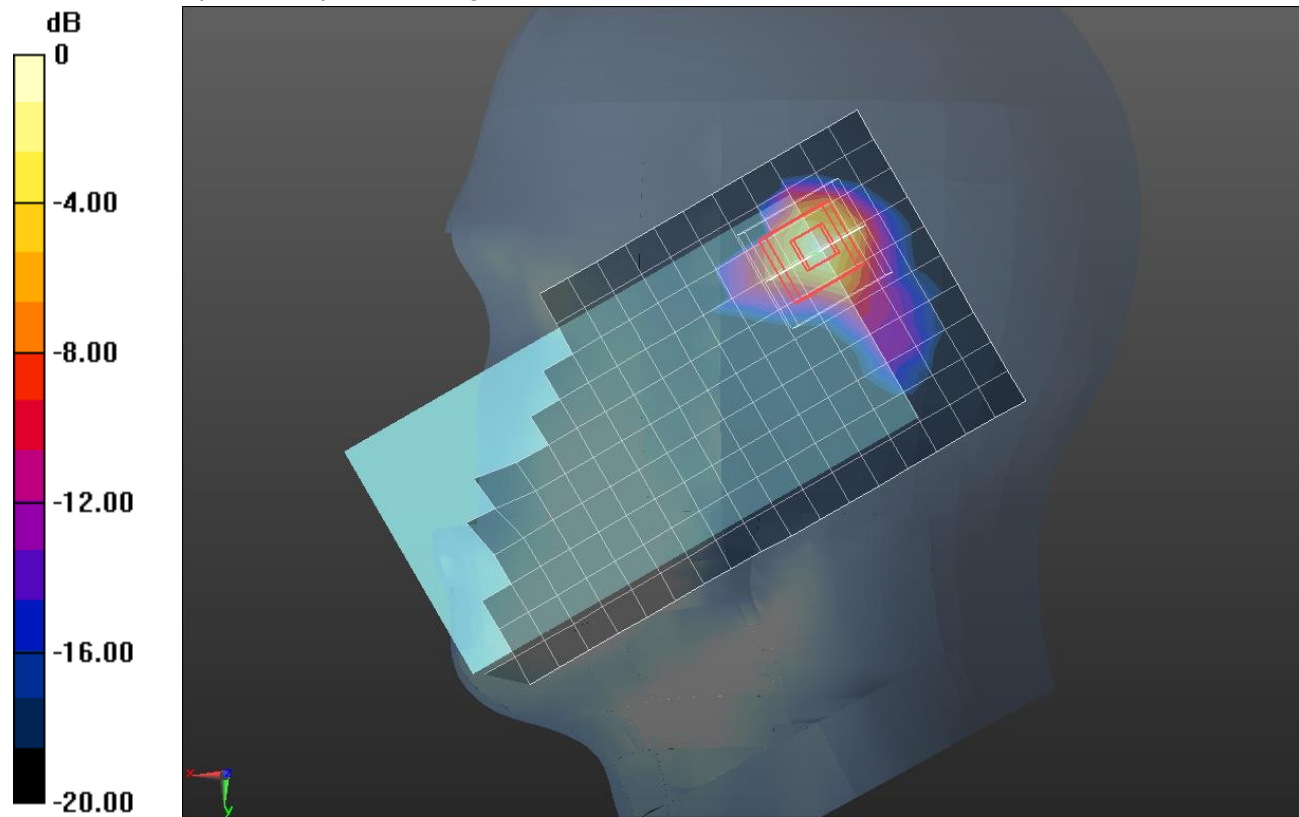

0 dB = 1.05 W/kg = 0.21 dBW/kg

Wi-Fi 5.5GHz_MIMO

Frequency: 5510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 5510$ MHz; $\sigma = 5.643$ S/m; $\epsilon_r = 50.352$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(3.98, 3.98, 3.98); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1166

Front/802.11n_ch 102 /Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.241 W/kg


Front/802.11n_ch 102 /Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.489 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

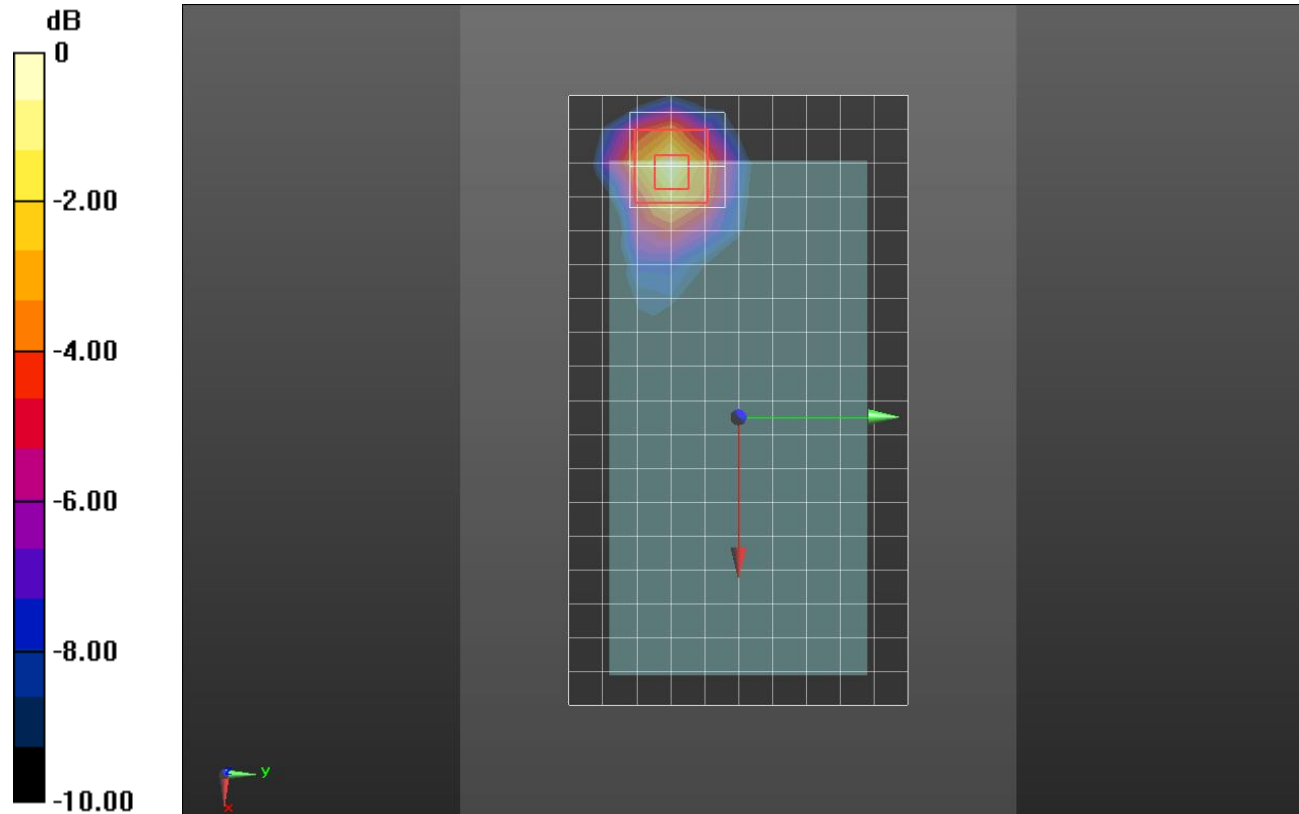

0 dB = 0.251 W/kg = -6.00 dBW/kg

Wi-Fi 5.8GHz_MIMO

Frequency: 5755 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.121$ S/m; $\epsilon_r = 34.164$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn614; Calibrated: 2014-09-18
- Probe: EX3DV4 - SN7314; ConvF(4.63, 4.63, 4.63); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1855

RHS/Touch_802.11n_ch 151/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg


RHS/Touch_802.11n_ch 151/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.61 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

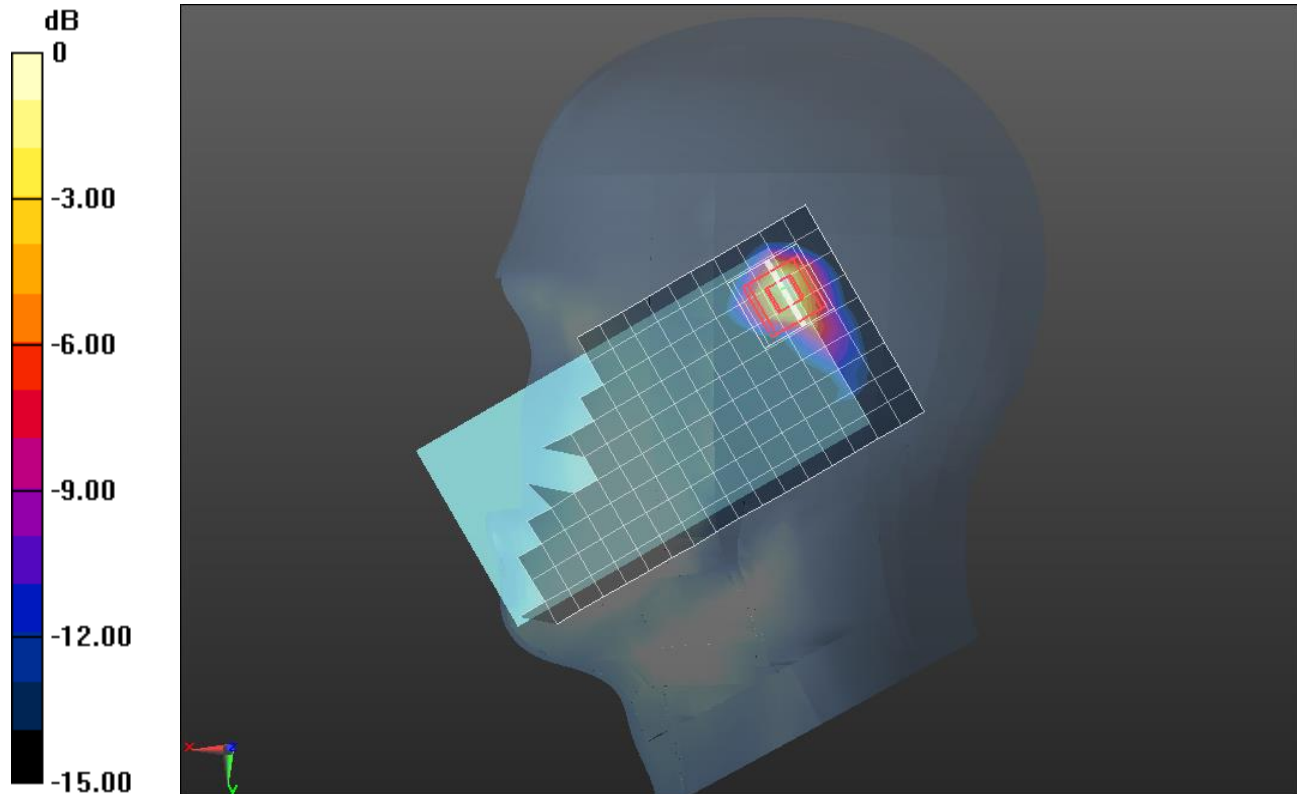

0 dB = 1.09 W/kg = 0.37 dBW/kg

Wi-Fi 5.8GHz_MIMO

Frequency: 5755 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 5755$ MHz; $\sigma = 5.986$ S/m; $\epsilon_r = 49.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(4.09, 4.09, 4.09); Calibrated: 2014-08-27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1166

Front/802.11n_ch 151 /Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.142 W/kg


Front/802.11n_ch 151 /Zoom Scan (9x10x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.602 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

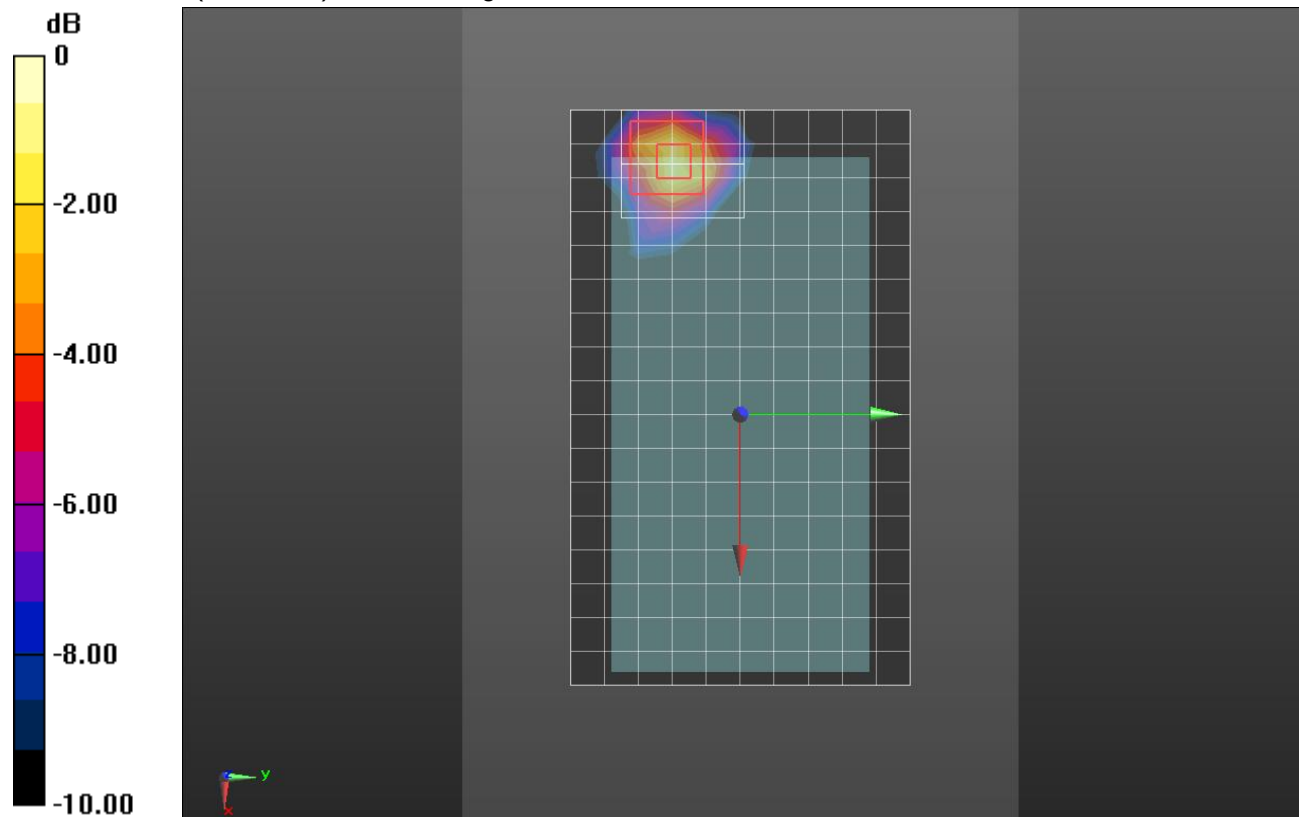

0 dB = 0.177 W/kg = -7.52 dBW/kg