




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 9:14:53 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	20.5°C	Liquid Simulant:	2450
Device Under Test:	94312MCG - Galileo	Relative Permittivity:	49.23
Relative Humidity:	37.3%	Conductivity:	1.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	1.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	1.48 V/m
Test Frequency:	2412MHz	SAR 1g:	0.004 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	Set by SW	Extrapolation:	poly4

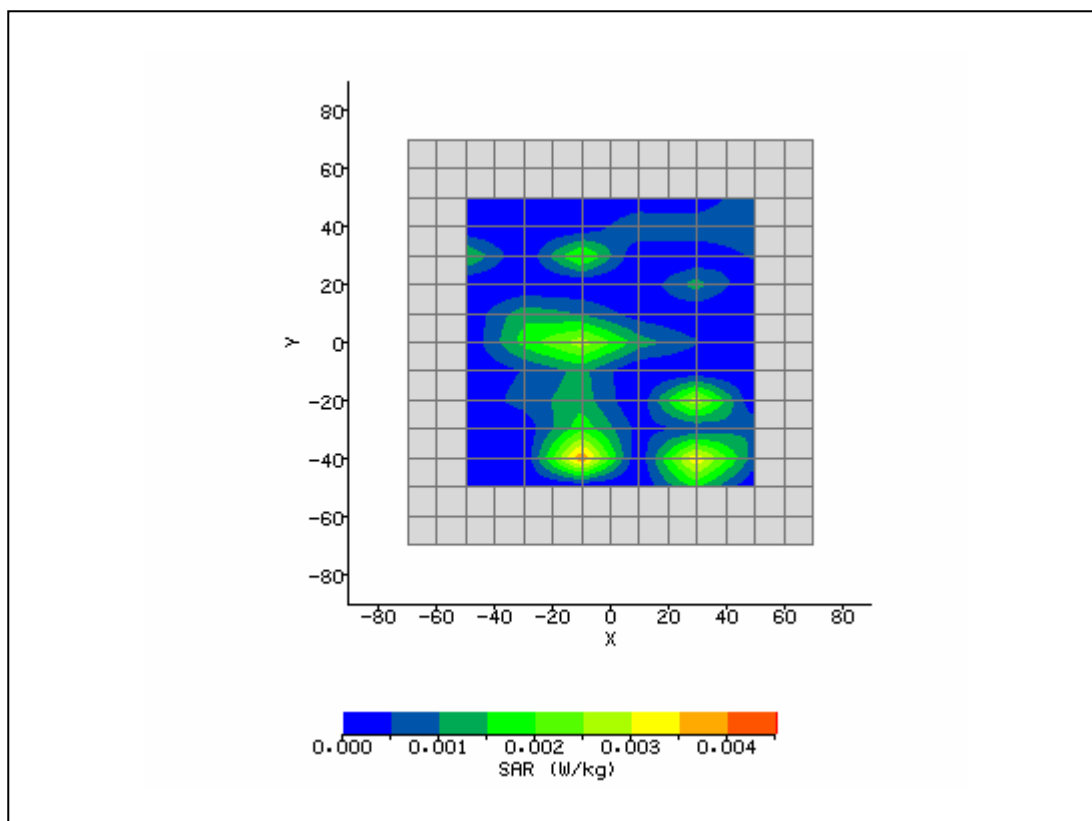


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 9:33:24 AM	DUT Battery Model/No:	
Filename:	Main_1_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	20.5°C	Liquid Simulant:	2450
Device Under Test:	94312MCG - Galileo	Relative Permittivity:	49.03
Relative Humidity:	37.3%	Conductivity:	2.016
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	20.00 mm
Antenna Configuration:	Yageo - Main	Max E Field:	1.11 V/m
Test Frequency:	2437MHz	SAR 1g:	0.003 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	Set by SW	Extrapolation:	poly4

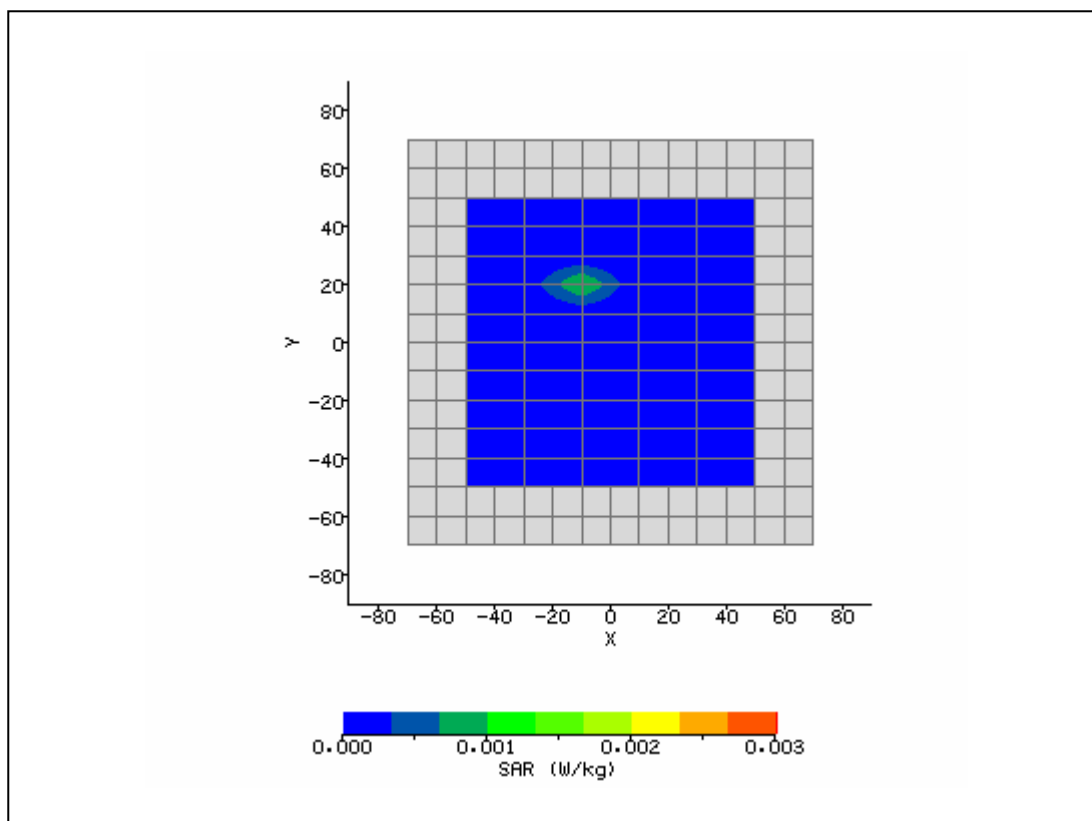


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 9:47:09 AM	DUT Battery Model/No:	
Filename:	Main_11_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	20.5°C	Liquid Simulant:	2450
Device Under Test:	94312MCG - Galileo	Relative Permittivity:	48.88
Relative Humidity:	37.3%	Conductivity:	2.047
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-15.33 mm
DUT Position:	Lap	Max SAR Y-axis Location:	25.33 mm
Antenna Configuration:	Yageo - Main	Max E Field:	1.69 V/m
Test Frequency:	2462MHz	SAR 1g:	0.006 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	Set by SW	Extrapolation:	poly4

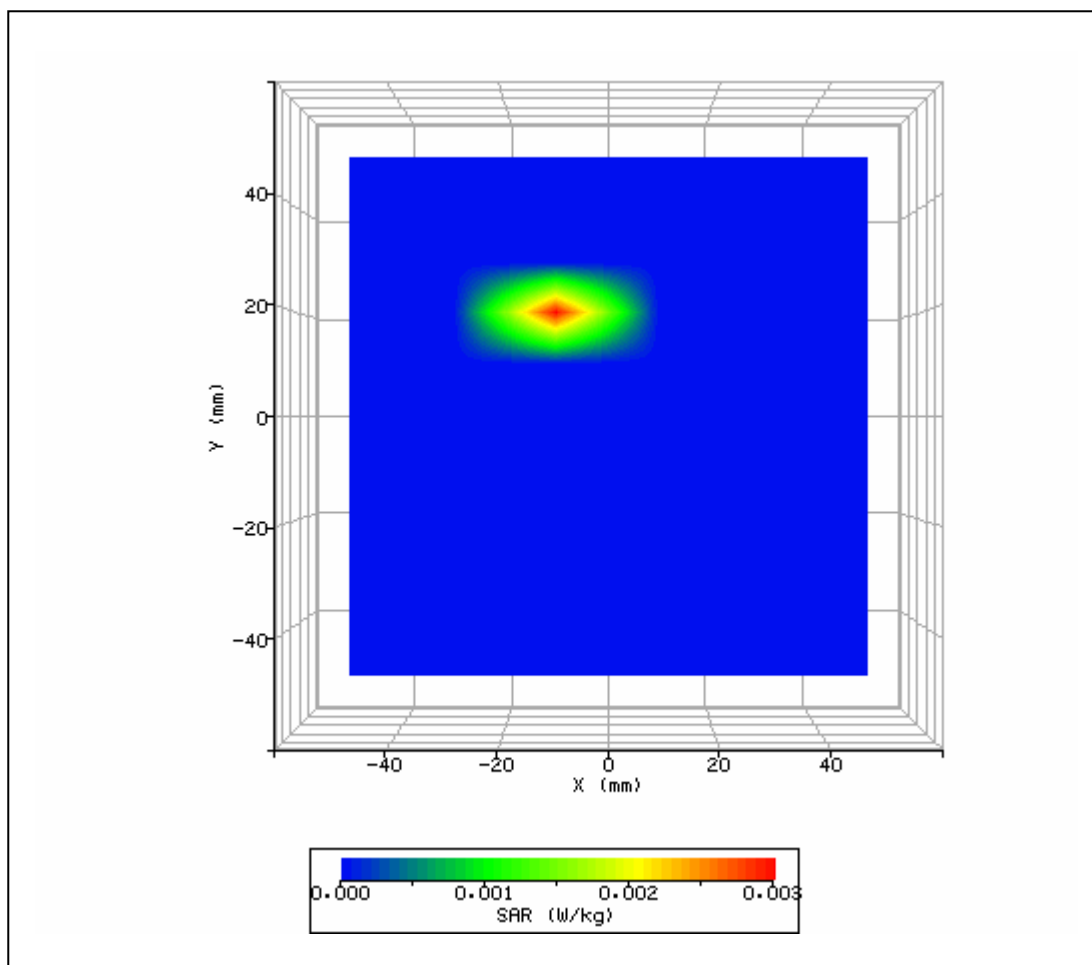


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 10:04:11 AM	DUT Battery Model/No:	
Filename:	Main_11_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	20.5°C	Liquid Simulant:	2450
Device Under Test:	94312MCG - Galileo	Relative Permittivity:	48.88
Relative Humidity:	37.3%	Conductivity:	2.047
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-20.00 mm
Antenna Configuration:	Yageo - Aux	Max E Field:	1.35 V/m
Test Frequency:	2462MHz	SAR 1g:	0.005 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	Set by SW	Extrapolation:	poly4

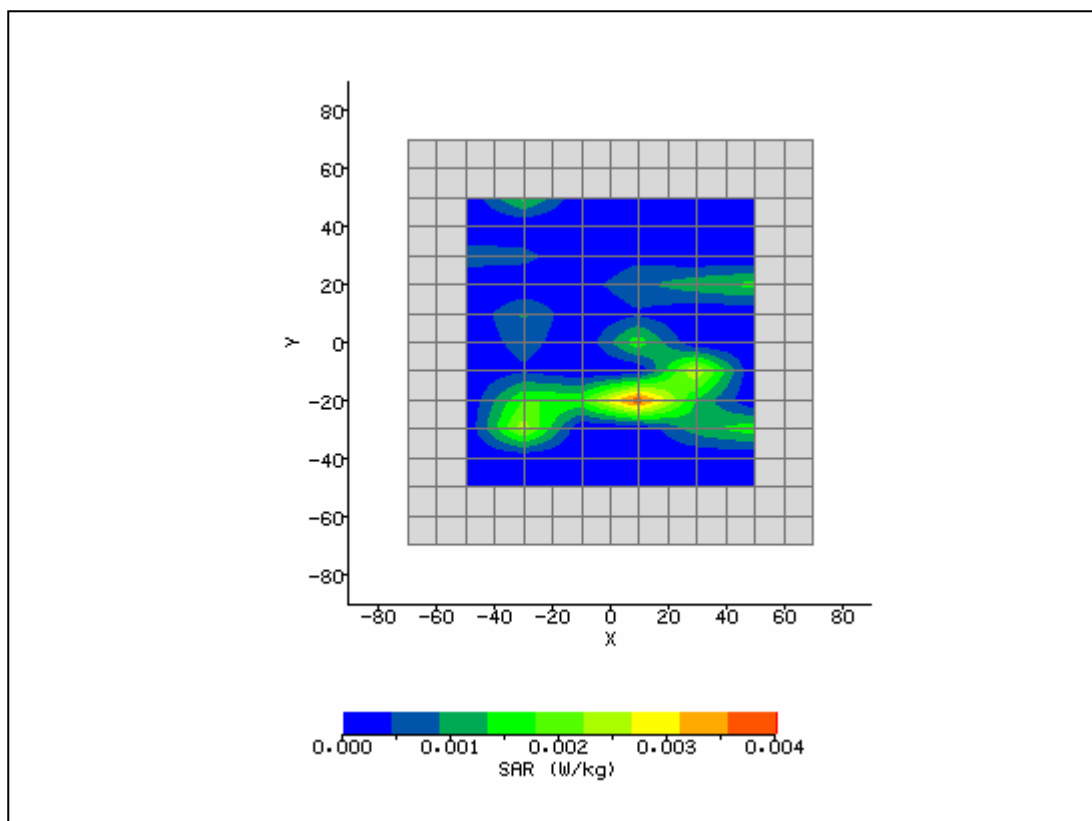


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 12:31:34 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	20.5°C	Liquid Simulant:	2450
Device Under Test:	94312MCG	Relative Permittivity:	49.23
Relative Humidity:	37.3%	Conductivity:	1.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-25.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	2.47 V/m
Test Frequency:	2412MHz	SAR 1g:	0.015 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.24 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	Set by SW	Extrapolation:	poly4

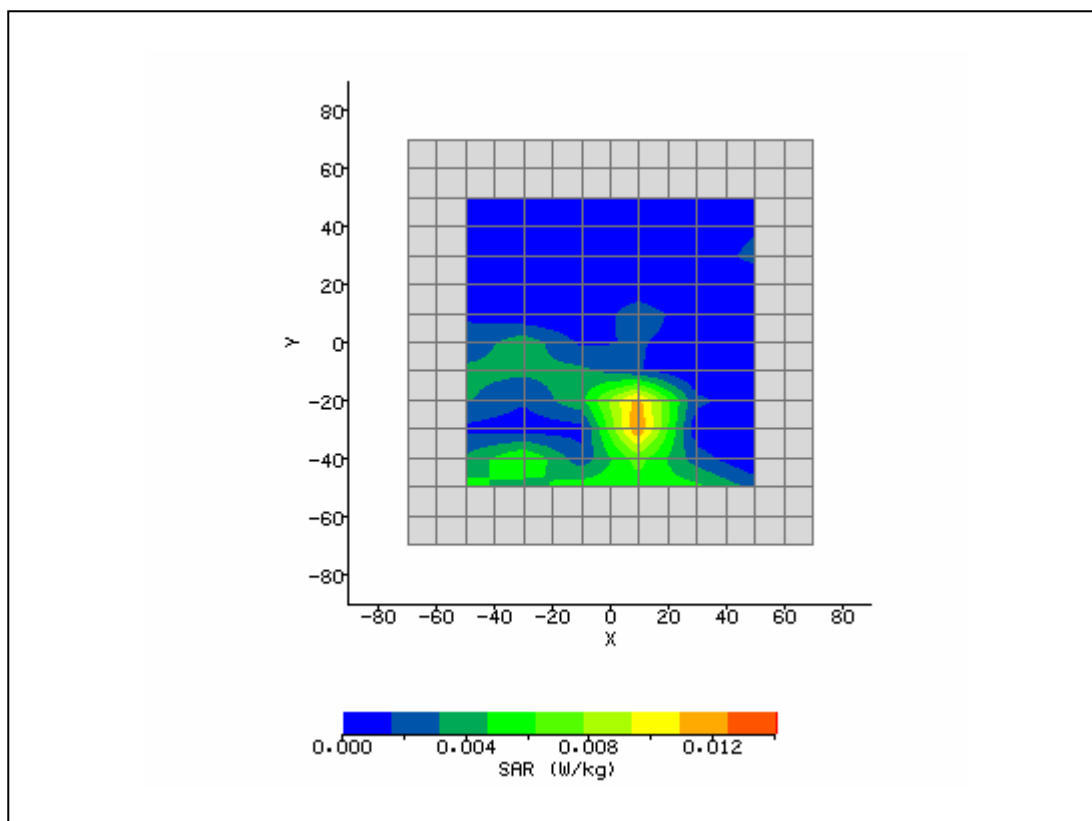


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 1:00:34 PM	DUT Battery Model/No:	
Filename:	Main_1_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	20.5°C	Liquid Simulant:	2450
Device Under Test:	94312MCG	Relative Permittivity:	49.03
Relative Humidity:	37.3%	Conductivity:	2.016
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	0.45 V/m
Test Frequency:	2437MHz	SAR 1g:	0.002 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	Set by SW	Extrapolation:	poly4

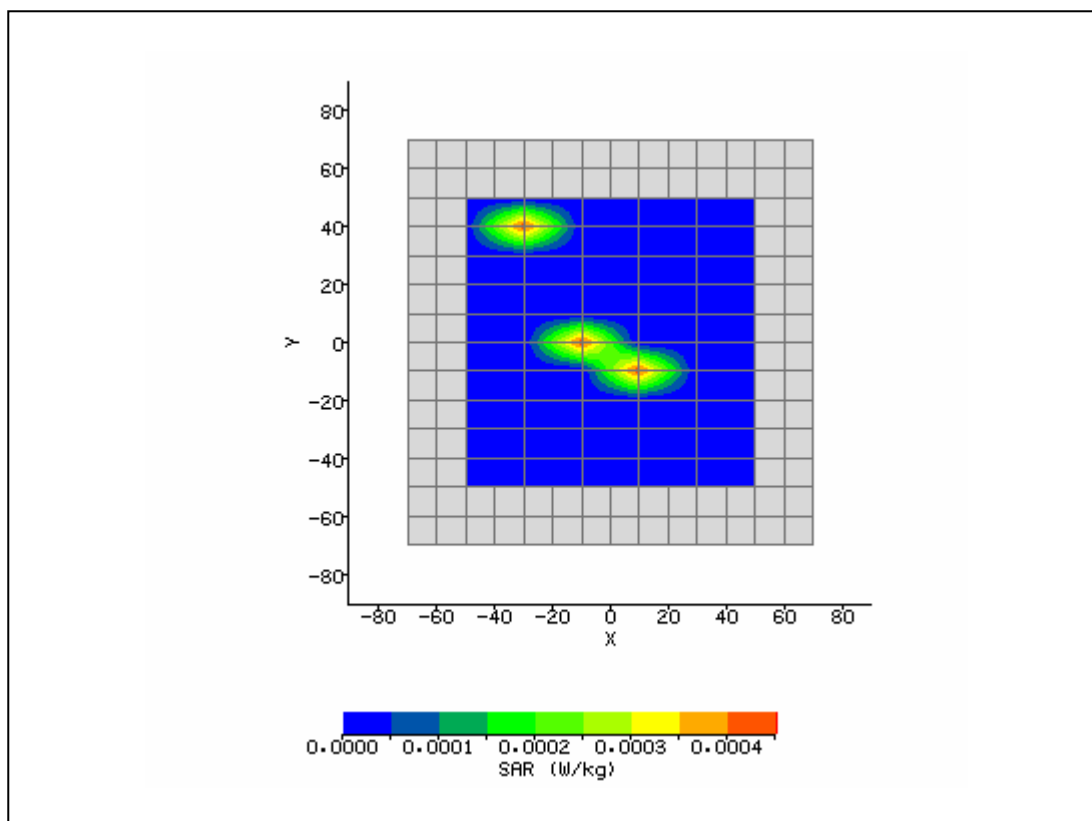

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 1:14:25 PM	DUT Battery Model/No:	
Filename:	Main_6_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	20.5°C	Liquid Simulant:	2450
Device Under Test:	94312MCG	Relative Permittivity:	48.88
Relative Humidity:	37.3%	Conductivity:	2.047
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	WNC - Main	Max E Field:	1.64 V/m
Test Frequency:	2462MHz	SAR 1g:	0.006 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	Set by SW	Extrapolation:	poly4

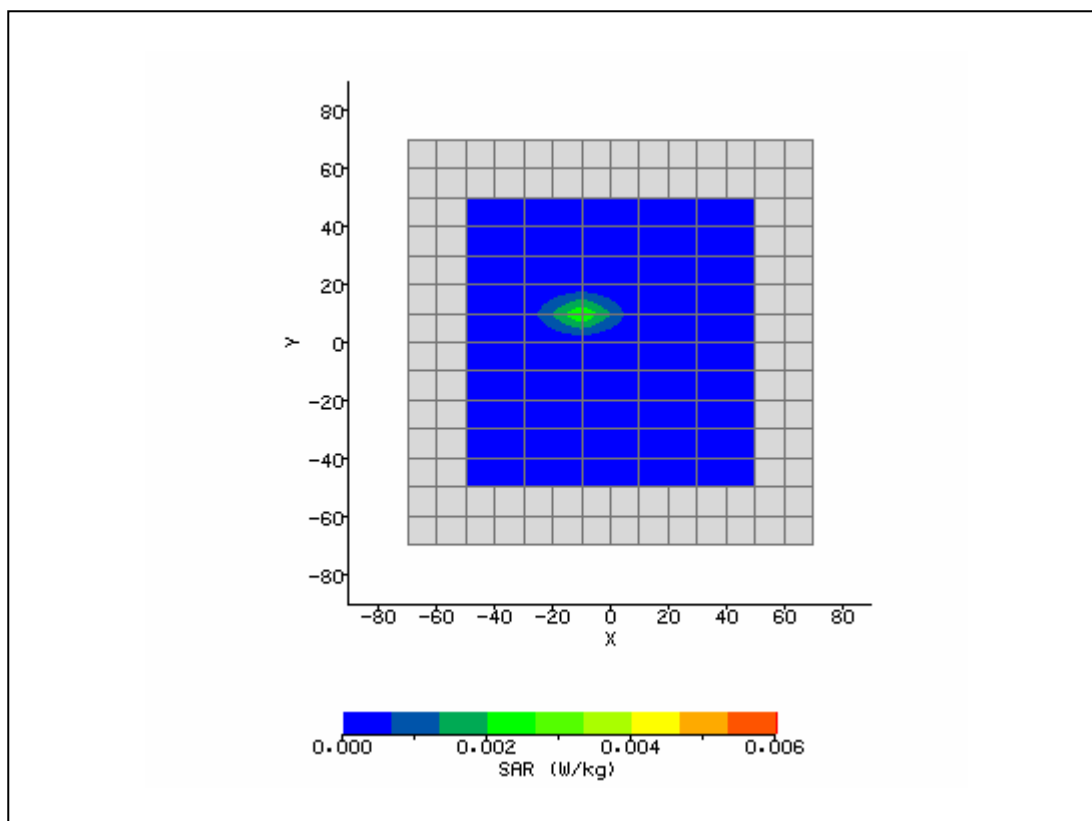

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 1:50:56 PM	DUT Battery Model/No:	
Filename:	Main_11_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	20.5°C	Liquid Simulant:	2450
Device Under Test:	94312MCG	Relative Permittivity:	49.23
Relative Humidity:	37.3%	Conductivity:	1.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	20.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	WNC - Aux	Max E Field:	1.28 V/m
Test Frequency:	2412MHz	SAR 1g:	0.005 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	Set by SW	Extrapolation:	poly4

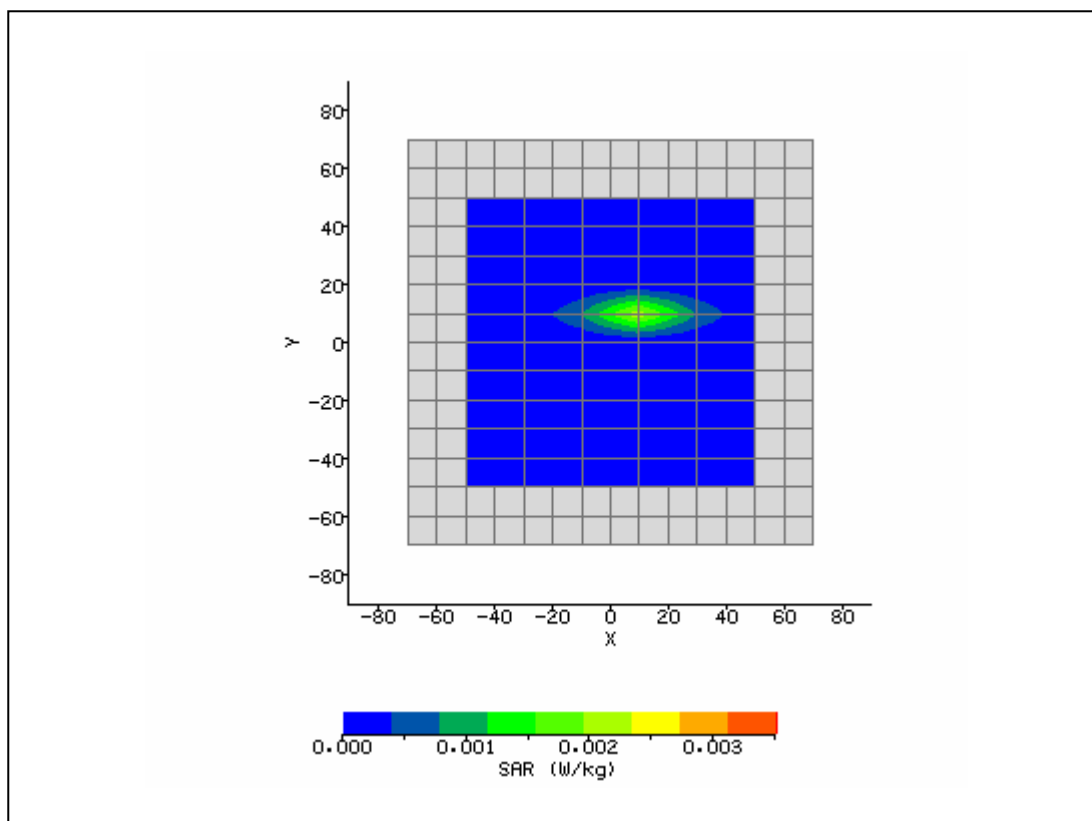

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/10/2008 8:32:12 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	38.74
Relative Humidity:	30%	Conductivity:	1.77
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-3.20 mm
DUT Position:	8mm	Max SAR Y-axis Location:	0.80 mm
Antenna Configuration:	2450 Dipole	Max E Field:	140.79 V/m
Test Frequency:	2450MHz	SAR 1g:	48.341 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	22.674 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	3.016 W/kg
Type of Modulation:		SAR End:	3.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/07/08
Input Power Level:	1W	Extrapolation:	poly4

