



Spot Check Evaluation

FCC ID : UZ7EM45B1
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45B1
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(H), 27(F), 27(M),
27(N), 27(O), 27(Q), 90(S)
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart E §15.407

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION	4
1.1 Product Feature of Equipment Under Test	4
1.2 Modification of EUT	5
1.3 Testing Site.....	5
1.4 Test Software	5
1.5 Applicable Standards	6
2 RE-USE OF MEASURED DATA	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section	9
3 LIST OF MEASURING EQUIPMENT	21
4 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST SETUP PHOTOGRAPHS	
APPENDIX B. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FZ460508-02	Rev. 01	Initial issue of report	Feb. 13, 2025



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B1
FCC ID	UZ7EM45B1
IMEI Code	Conducted: 350332150060484 Conduction: 350332150060096/350332150064049 Radiation: 350332150060260/350332150063959 CBP/DFS: 350332150060575
HW Version	DV
SW Version	14-24-09.00-UG-U00-PRD-ATH-04
MFD	09DEC24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO2-01



1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS DFS01-KS 03CH02-KS 03CH04-KS 03CH06-KS	CN1257	314309

1.4 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH04-KS	AUDIX	E3	210616
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(H), 27(F), 27(M), 27(N), 27(O), 27(Q), 90(S)
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: EM45B1, FCC ID: UZ7EM45B1) is electrically identical to the reference device (Model: EM45B2, FCC ID: UZ7EM45B2) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA460508-02.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: UZ7EM45B1.

2.2 Model Difference Information

The **main** difference between FCC ID: UZ7EM45B2 and FCC ID: UZ7EM45B1 is as below:

- Removed RFID function.
- Antenna 1 removed WWAN TX function, keep supported Low bands and Middle bands RX function.

Other differences and all the details of similarity and difference can be found in the confidential documents (UZ7EM45B1 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	UZ7EM45B2	Full test	FR460508A	UZ7EM45B1	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	UZ7EM45B2	Full test	FR460508B	UZ7EM45B1	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	UZ7EM45B2	Full test	FR460508C	UZ7EM45B1	Spot check	Y, All test items
	DXX (NFC)	13.56	UZ7EM45B2	Full test	FR460508D	UZ7EM45B1	Spot check	Y, All test items
15E	U-NII	5180~5240	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5260~5320	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5500~5720	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5745~5825	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5260~5320 5500~5720	UZ7EM45B2	Full test	FZ460508	UZ7EM45B1	Spot check	Y, All test items
	6CD	5925~7125	UZ7EM45B2	Full test	FR460508G FR460508H	UZ7EM45B1	Spot check	Y, All test items
22, 24, 27, 90	PCE (GSM)	GSM 850/1900	UZ7EM45B2	Full test	FG460508A	UZ7EM45B1	Spot check	Y, All test items
	PCE (WCDMA)	Band II, IV, V	UZ7EM45B2	Full test	FG460508A	UZ7EM45B1	Spot check	Y, All test items
	PCE (LTE)	B2/4/5/7/13/17/26/38/ 41/42/66/71 ULCA 5B/7C/38C 41C/66B/66C	UZ7EM45B2	Full test	FG460508B FG460508C FG460508D FG460508F	UZ7EM45B1	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	UZ7EM45B2	Full test	FG460508E	UZ7EM45B1	Spot check	Y, All test items
	PCE (NR)	n2/n5/n7/n26/ n38/n41/n66/ n71/n77/n78	UZ7EM45B2	Full test	FG460508G FG460508H FG460508J FG460508K	UZ7EM45B1	Spot check	Y, All test items
	PCE (NR)	n26 (90S)	UZ7EM45B2	Full test	FG460508I	UZ7EM45B1	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH00)	Number of Channels	79	79	0	3
	Hopping Channel Separation	1.135	0.996	0.139	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.94	0.95	0.01	3
	99% Bandwidth	0.851	0.89	0.039	3
	Conducted Band Edges	-41.78	-43.72	1.94	3
	Conducted Spurious Emission	-44.27	-46.4	2.13	3
BT 1Mbps (CH00)	Radiated Band Edges and Radiated Spurious Emission	56.93	55.71	1.22	3
BT	AC Conducted Emission	14.81	13.96	0.85	3
BLE 1Mbps (CH39)	6dB Bandwidth	0.68	0.69	0.01	3
	99% Bandwidth	1.027	1.035	0.008	3
	Power Spectral Density	-5.44	-6.6	1.16	3
	Conducted Band Edges	-57.54	-58.86	1.32	3
	Conducted Spurious Emission	-44.23	-45.77	1.54	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	46.49	48.90	2.41	3
BLE	AC Conducted Emission	14.81	13.96	0.85	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth	8.56	8.56	0	3
	99% Bandwidth	13.187	13.307	0.12	3
	Power Spectral Density	-1.37	-1.5	0.13	3
	Conducted Band Edges	-47.92	-48.21	0.29	3
	Conducted Spurious Emission	-43.71	-46.01	2.3	3
WIFI 2.4G (802.11g CH01)	Radiated Band Edges and Spurious Emission	51.90	52.85	1.95	3
WIFI 2.4G	AC Conducted Emission	14.81	13.96	0.85	3
WIFI 5G (802.11a CH149)	26dB Bandwidth	19.15	19.29	0.14	3
	99% Bandwidth	16.705	16.705	0	3
	Power Spectral Density	6.94	6.92	0.02	3
	Unwanted Emissions	16.31	16.33	0.02	3
WIFI 5G (11ax HE160 Ch50)	Radiated Band Edges and Spurious Emission	50.75	52.88	2.13	3
WIFI 5G	AC Conducted Emission	11.52	14.22	2.70	3
WIFI 5G (802.11a CH116)	DFS	0.862829	0.935231	0.073	3
WIFI 6G UNII-5 (802.11ax HE160 CH15 6025MHz)-6CD Indoor Client	26dB Emission Bandwidth	165.79	166.17	0.38	3
	99% Occupied Bandwidth	156.8	156.495	0.305	3
	Fundamental Maximum EIRP	17.64	17.39	0.25	3
	Fundamental Power Spectral Density	-2.95	-3.42	0.47	3
	In-Band Emissions	-12.59	-11.73	0.86	3
WIFI 6G UNII-5 (802.11ax HE20 CH1 5955MHz)-6CD Standard Client	26dB Emission Bandwidth	21.15	21.25	0.1	3
	99% Occupied Bandwidth	19.048	19.086	0.038	3
	Fundamental Maximum EIRP	17.68	17.58	0.10	3
	Fundamental Power Spectral Density	5.13	4.38	0.75	3
WIFI 6G UNII-5 (802.11ax HE160 CH47 6185MHz)	In-Band Emissions	-19.18	-18.83	0.35	3
	Contention Based Protocol	-64.77	-66.92	2.15	3



WIFI 6G (802.11ax HE20 Ch233)	Radiated Band Edges and Spurious Emission	66.90	67.00	0.1	3
WIFI 6G	AC Conducted Emission	14.72	16.18	1.46	3
NFC	20dB Spectrum Bandwidth	2.48	2.49	0.01	3
	99% OBW Spectrum Bandwidth	2.11	2.11	0	3
	Frequency Stability	-21.3496	-22.382	1.0324	3
	Field Strength of Fundamental Emissions	60.61	60.41	0.2	3
	Radiated Spurious Emissions	36.17	36.86	0.69	3
	AC Conducted Emission	14.22	16.01	1.79	3

Mode	Test Item	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 27F LTE Band 13	Radiated Spurious Emission	-62.22	-61.76	0.46	3
Part27O_N77	Equivalent Isotropic Radiated Power	26.23	25.90	0.33	3
	Peak-to-Average Ratio	5.24	5.04	0.2	3
	Occupied Bandwidth	57.948	57.853	0.095	3
	Conducted Band Edge	-14.04	-15.20	1.16	3
	Conducted Spurious Emission	-33.15	-33.32	0.17	3
	Frequency Stability	0.0039	0.0027	0.0012	3

Conducted power for Unlicensed bands

Test Item	Mode	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power(dBm) BT & BLE	BT BR/EDR	9.57	9.11	0.46	3
	BLE 1Mbps	9.57	9.10	0.47	3
	BLE 2Mbps	9.58	9.24	0.34	3
Conducted Power(dBm) WIFI 2.4G	11b, 2.4GHz	25.04	24.97	0.07	3
	11g, 2.4GHz	28.45	28.36	0.09	3
	11n HT20, 2.4GHz	28.38	28.34	0.04	3
	11ac VHT20, 2.4GHz	28.30	28.25	0.05	3
	11ax HE20, 2.4GHz	28.56	28.51	0.05	3
Conducted Power(dBm) WIFI 5G	11a, 5.2GHz	22.53	22.38	0.15	3
	11a, 5.3GHz	22.62	22.15	0.47	3
	11a, 5.5GHz	22.19	21.74	0.45	3
	11a, 5.8GHz	21.69	21.47	0.22	3
	11n HT20, 5.2GHz	21.34	21.26	0.08	3
	11n HT20, 5.3GHz	20.98	20.62	0.36	3
	11n HT20, 5.5GHz	21.32	21.26	0.06	3
	11n HT20, 5.8GHz	21.37	21.33	0.04	3
	11ac VHT20, 5.2GHz	21.41	21.29	0.12	3
	11ac VHT20, 5.3GHz	21.04	20.69	0.35	3
	11ac VHT20, 5.5GHz	21.36	21.33	0.03	3
	11ac VHT20, 5.8GHz	21.41	21.36	0.05	3
	11ax HE20, 5.2GHz	21.47	21.34	0.13	3
	11ax HE20, 5.3GHz	21.09	20.72	0.37	3
	11ax HE20, 5.5GHz	21.39	21.37	0.02	3
	11ax HE20, 5.8GHz	21.45	21.39	0.06	3
	11n HT40, 5.2GHz	20.76	20.71	0.05	3
	11n HT40, 5.3GHz	20.71	20.53	0.18	3
	11n HT40, 5.5GHz	20.62	20.58	0.04	3



	11n HT40, 5.8GHz	20.36	20.28	0.08	3
	11ac VHT40, 5.2GHz	20.82	20.76	0.06	3
	11ac VHT40, 5.3GHz	20.77	20.56	0.21	3
	11ac VHT40, 5.5GHz	20.67	20.62	0.05	3
	11ac VHT40, 5.8GHz	20.42	20.32	0.10	3
	11ax HE40, 5.2GHz	20.86	20.81	0.05	3
	11ax HE40, 5.3GHz	20.83	20.61	0.22	3
	11ax HE40, 5.5GHz	20.73	20.68	0.05	3
	11ax HE40, 5.8GHz	20.48	20.36	0.12	3
	11ac VHT80, 5.2GHz	20.07	19.99	0.08	3
	11ac VHT80, 5.3GHz	20.14	19.91	0.23	3
	11ac VHT80, 5.5GHz	20.32	20.08	0.24	3
	11ac VHT80, 5.8GHz	20.17	20.10	0.07	3
	11ax HE80, 5.2GHz	20.12	20.05	0.07	3
	11ax HE80, 5.3GHz	20.22	19.96	0.26	3
	11ax HE80, 5.5GHz	20.38	20.12	0.26	3
	11ax HE80, 5.8GHz	20.24	20.15	0.09	3
	11ac VHT160, 5.3GHz	19.81	19.66	0.15	3
	11ac VHT160, 5.5GHz	19.79	19.63	0.16	3
	11ax HE160, 5.3GHz	19.92	19.70	0.22	3
	11ax HE160, 5.5GHz	19.88	19.69	0.19	3
Conducted Power(dBm) WIFI 6G Indoor Client	6CD 11a, U-NII-5	7.05	6.75	0.30	3
	6CD 11a, U-NII-6	7.97	7.86	0.11	3
	6CD 11a, U-NII-7	6.64	6.58	0.06	3
	6CD 11a, U-NII-8	5.82	5.78	0.04	3
	6CD 11ax HE20, U-NII-5	10.85	10.84	0.01	3
	6CD 11ax HE20, U-NII-6	11.28	11.21	0.07	3
	6CD 11ax HE20, U-NII-7	10.12	10.07	0.05	3
	6CD 11ax HE20, U-NII-8	9.61	9.57	0.04	3
	6CD 11ax HE40, U-NII-5	13.76	13.74	0.02	3
	6CD 11ax HE40, U-NII-6	13.74	13.59	0.15	3
	6CD 11ax HE40, U-NII-7	13.04	12.79	0.25	3
	6CD 11ax HE40, U-NII-8	12.65	12.60	0.05	3
	6CD 11ax HE80, U-NII-5	16.97	16.93	0.04	3
	6CD 11ax HE80, U-NII-6	16.82	16.77	0.05	3
	6CD 11ax HE80, U-NII-7	16.36	16.30	0.06	3
	6CD 11ax HE80, U-NII-8	15.76	15.71	0.05	3
	6CD 11ax HE160, U-NII-5	17.29	17.04	0.25	3
	6CD 11ax HE160, U-NII-6	17.01	16.95	0.06	3
Conducted Power(dBm) WIFI 6G Standard Client	6CD 11ax HE160, U-NII-7	17.06	17.01	0.05	3
	6CD 11ax HE160, U-NII-8	16.89	16.83	0.06	3
	6CD 11a, U-NII-5	17.29	17.21	0.08	3
	6CD 11a, U-NII-7	17.11	17.07	0.04	3
	6CD 11ax HE20, U-NII-5	17.33	17.23	0.10	3
	6CD 11ax HE20, U-NII-7	17.08	17.04	0.04	3
	6CD 11ax HE40, U-NII-5	17.23	17.16	0.07	3
	6CD 11ax HE40, U-NII-7	16.97	16.93	0.04	3
	6CD 11ax HE80, U-NII-5	17.26	17.14	0.12	3
	6CD 11ax HE80, U-NII-7	16.96	16.92	0.04	3
	6CD 11ax HE160, U-NII-5	17.34	17.10	0.24	3
	6CD 11ax HE160, U-NII-7	17.12	17.07	0.05	3



Conducted power for Licensed bands

Test Item	Mode	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	GSM 850	32.32	32.3	0.02	3
	GSM 1900	29.07	28.82	0.25	3
	WCDMA 850	23.02	22.87	0.15	3
	WCDMA1900	22.91	22.64	0.27	3
	WCDMA1700	22.79	22.75	0.04	3
	LTE B2	22.84	22.78	0.06	3
	LTE B4	22.89	22.45	0.44	3
	LTE B5	22.84	22.71	0.13	3
	LTE B5B	22.84	22.77	0.07	3
	LTE B13	22.78	22.63	0.15	3
	LTE B17	22.75	22.56	0.19	3
	LTE B26H	23.04	22.72	0.32	3
	LTE B26L	22.80	22.75	0.05	3
	LTE B66	22.89	22.74	0.15	3
	LTE B71	22.98	22.51	0.47	3
	LTE B7	23.83	23.48	0.35	3
	LTE B7C	23.70	23.59	0.11	3
	LTE B38	22.84	22.7	0.14	3
	LTE B41	22.89	22.66	0.23	3
	LTE B38C	22.84	22.71	0.13	3
	LTE B41C	22.88	22.78	0.1	3
	LTE B42	22.64	22.6	0.04	3
	LTE B66B	22.73	22.54	0.19	3
	LTE B66C	22.72	22.55	0.17	3
	N2	23.69	23.19	0.5	3
	N5	23.19	22.85	0.34	3
	N26H	23.22	22.93	0.29	3
	N26L	22.91	22.73	0.18	3
	N7	24.85	24.37	0.48	3
	N38	23.31	22.85	0.46	3
	N41	23.01	22.67	0.34	3
	N66	23.28	23.12	0.16	3
	N71	23.60	23.22	0.38	3
	N77 27O	26.28	25.95	0.33	3
	N78 27O	26.24	26.02	0.22	3
	N77 27Q	26.29	25.97	0.32	3
	N78 27Q	26.25	25.93	0.32	3
	N77 27O MIMO	24.32	23.89	0.43	3
	N78 27O MIMO	23.94	23.87	0.07	3
	N77 27Q MIMO	24.38	23.92	0.46	3
	N78 27Q MIMO	24.31	23.95	0.36	3



6CD- < indoor client>

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	093	6415	0.03	0.04	4.16	3.22	0.35	-0.85	4.51	2.37	24.00	Pass	6	6

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	093	6415	Full	0.00	0.00	8.03	7.42	0.35	-0.85	8.38	6.57	24.00	Pass	8	8
HE40	MCS0	1	091	6405	Full	0.00	0.00	10.87	10.38	0.35	-0.85	11.22	9.53	24.00	Pass	11	11
HE80	MCS0	1	087	6385	Full	0.00	0.00	14.22	13.48	0.35	-0.85	14.57	12.63	24.00	Pass	14	14
HE160	MCS0	1	015	6025	Full	0.00	0.00	13.83	14.15	0.35	-0.85	14.18	13.30	24.00	Pass	14	14

U-NII-6 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6475	0.03	0.04	5.45	4.09	0.75	-2.44	6.20	1.65	24.00	Pass	5	5

U-NII-6 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	105	6475	Full	0.00	0.00	8.42	7.86	0.75	-2.44	9.17	5.42	24.00	Pass	8.5	8.5
HE40	MCS0	1	107	6485	Full	0.00	0.00	11.05	9.97	0.75	-2.44	11.80	7.53	24.00	Pass	11	11
HE80	MCS0	1	103	6465	Full	0.00	0.00	14.09	13.15	0.75	-2.44	14.84	10.71	24.00	Pass	14	14
HE160	MCS0	1	111	6505	Full	0.00	0.00	14.21	13.31	0.75	-2.44	14.96	10.87	24.00	Pass	14	14



U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	117	6535	0.03	0.04	4.25	2.69	1.02	0.16	5.27	2.85	24.00	Pass	3.5	3.5

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	181	6855	Full	0.00	0.00	7.03	6.95	1.02	0.16	8.05	7.11	24.00	Pass	7.5	7.5
HE40	MCS0	1	147	6685	Full	0.00	0.00	10.01	9.45	1.02	0.16	11.03	9.61	24.00	Pass	10	10
HE80	MCS0	1	135	6625	Full	0.00	0.00	13.55	12.93	1.02	0.16	14.57	13.09	24.00	Pass	13.5	13.5
HE160	MCS0	1	143	6665	Full	0.00	0.00	14.25	13.54	1.02	0.16	15.27	13.70	24.00	Pass	14	14

U-NII-8 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6895	0.03	0.04	3.27	2.12	0.70	1.66	3.97	3.78	24.00	Pass	3	3

U-NII-8 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	2	185	6875	Full	0.00	0.00	6.68	6.29	0.70	1.66	7.38	7.95	24.00	Pass	7	7
HE40	MCS0	2	195	6925	Full	0.00	0.00	9.78	9.32	0.70	1.66	10.48	10.98	24.00	Pass	10	10
HE80	MCS0	2	199	6945	Full	0.00	0.00	12.75	12.58	0.70	1.66	13.45	14.24	24.00	Pass	13	13
HE160	MCS0	2	207	6985	Full	0.00	0.00	13.97	13.60	0.70	1.66	14.67	15.26	24.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	093	6415	0.03	0.04	4.18	3.25	6.75	0.35		7.10	24.00	Pass	6	

U-NII-6 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				Ant 8	Ant 10
11a	6Mbps	2	6475	0.03	0.04	5.49	4.11	7.86	0.75		8.61	24.00	Pass	5	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	117	6535	0.03	0.04	4.29	2.71	6.58	1.02		7.60	24.00	Pass	3.5	

U-NII-8 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				Ant 8	Ant 10
11a	6Mbps	2	6895	0.03	0.04	3.30	2.17	5.78	1.66		7.44	24.00	Pass	3	

<SDM mode>

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	093	6415	Full	0.00	0.00	8.18	7.45	10.84	0.35		11.19	24.00	Pass	8	
HE40	MCS0	2	091	6405	Full	0.00	0.00	11.01	10.43	13.74	0.35		14.09	24.00	Pass	11	
HE80	MCS0	2	087	6385	Full	0.00	0.00	14.29	13.52	16.93	0.35		17.28	24.00	Pass	14	
HE160	MCS0	2	015	6025	Full	0.00	0.00	13.88	14.18	17.04	0.35		17.39	24.00	Pass	14	



U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	105	6475	Full	0.00	0.00	8.47	7.91	11.21	0.75		11.96	24.00	Pass	8.5	
HE40	MCS0	2	107	6485	Full	0.00	0.00	11.09	10.01	13.59	0.75		14.34	24.00	Pass	11	
HE80	MCS0	2	103	6465	Full	0.00	0.00	14.24	13.22	16.77	0.75		17.52	24.00	Pass	14	
HE160	MCS0	2	111	6505	Full	0.00	0.00	14.42	13.39	16.95	0.75		17.70	24.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	181	6855	Full	0.00	0.00	7.09	7.02	10.07	1.02		11.09	24.00	Pass	7.5	
HE40	MCS0	2	147	6685	Full	0.00	0.00	10.06	9.48	12.79	1.02		13.81	24.00	Pass	10	
HE80	MCS0	2	135	6625	Full	0.00	0.00	13.59	12.97	16.30	1.02		17.32	24.00	Pass	13.5	
HE160	MCS0	2	143	6665	Full	0.00	0.00	14.35	13.61	17.01	1.02		18.03	24.00	Pass	14	

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	185	6875	Full	0.00	0.00	6.77	6.34	9.57	1.66	11.23	24.00	Pass	7		
HE40	MCS0	2	195	6925	Full	0.00	0.00	9.81	9.35	12.60	1.66	14.26	24.00	Pass	10		
HE80	MCS0	2	199	6945	Full	0.00	0.00	12.78	12.62	15.71	1.66	17.37	24.00	Pass	13		
HE160	MCS0	2	207	6985	Full	0.00	0.00	14.01	13.63	16.83	1.66	18.49	24.00	Pass	14		



<standard client >

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	001	5955	0.03	0.04	14.19	14.13	0.35	-0.85	14.54	13.28	30.00	Pass	14	

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	001	5955	Full	0.00	0.00	14.21	14.22	0.35	-0.85	14.56	13.37	30.00	Pass	14	14
HE40	MCS0	1	003	5965	Full	0.00	0.00	14.17	14.05	0.35	-0.85	14.52	13.20	30.00	Pass	14	14
HE80	MCS0	1	007	5985	Full	0.00	0.00	14.16	14.06	0.35	-0.85	14.51	13.21	30.00	Pass	14	14
HE160	MCS0	1	015	6025	Full	0.00	0.00	13.83	14.15	0.35	-0.85	14.18	13.30	30.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	149	6695	0.03	0.04	14.27	13.78	1.02	0.16	15.29	13.94	30.00	Pass	14	14

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	149	6695	Full	0.00	0.00	14.22	13.78	1.02	0.16	15.24	13.94	30.00	Pass	14	14
HE40	MCS0	1	147	6685	Full	0.00	0.00	14.29	13.43	1.02	0.16	15.31	13.59	30.00	Pass	14	14
HE80	MCS0	1	135	6625	Full	0.00	0.00	14.27	13.47	1.02	0.16	15.29	13.63	30.00	Pass	14	14
HE160	MCS0	1	143	6665	Full	0.00	0.00	14.25	13.54	1.02	0.16	15.27	13.70	30.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	001	5955	0.03	0.04	14.22	14.17	17.21	0.35		17.56	30.00	Pass	14	

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	001	5955	Full	0.00	0.00	14.24	14.19	17.23	0.35		17.58	30.00	Pass	14	
HE40	MCS0	2	003	5965	Full	0.00	0.00	14.22	14.07	17.16	0.35		17.51	30.00	Pass	14	
HE80	MCS0	2	007	5985	Full	0.00	0.00	14.17	14.09	17.14	0.35		17.49	30.00	Pass	14	
HE160	MCS0	2	015	6025	Full	0.00	0.00	13.95	14.23	17.10	0.35		17.45	30.00	Pass	14	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	149	6695	0.03	0.04	14.31	13.80	17.07	1.02		18.09	30.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	149	6695	Full	0.00	0.00	14.24	13.81	17.04	1.02		18.06	30.00	Pass	14	
HE40	MCS0	2	147	6685	Full	0.00	0.00	14.32	13.48	16.93	1.02		17.95	30.00	Pass	14	
HE80	MCS0	2	135	6625	Full	0.00	0.00	14.29	13.49	16.92	1.02		17.94	30.00	Pass	14	
HE160	MCS0	2	143	6665	Full	0.00	0.00	14.39	13.71	17.07	1.02		18.09	30.00	Pass	14	



Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Nov. 06, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 06, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Nov. 06, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Nov. 06, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 06, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Nov. 06, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 27, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 27, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 27, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 27, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024~Feb. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 05, 2024	Oct. 09, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417/MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 05, 2024	NCR	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	DFS (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	DFS (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417/MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	DFS (DFS01-KS)



Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Nov. 05, 2024	NCR	DFS (DFS01-KS)
----------	-----------------	-----------	-----	--------------	-----	---------------	-----	----------------

NCR: No Calibration Required

For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2024	Oct. 24, 2024	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 24, 2024	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz-1GHz	Aug. 18, 2024	Oct. 24, 2024	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Oct. 24, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 04, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 04, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 05, 2023	Nov. 04, 2024	Jul. 04, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G, MAX 30dB	Oct. 11, 2024	Oct. 20, 2024	Oct. 10, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Oct. 20, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Oct. 20, 2024	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Oct. 20, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2024	Nov. 12, 2024	Jan. 04, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 12, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of Conducted Measurement(WIFI 6G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement(NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	0.04ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------



03CH04-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix B. Reference Report



DYNAMIC FREQUENCY SELECTION

DFS Test Report

FCC ID : UZ7EM45B2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45B2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : FCC Part 15 Subpart E
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jun. 08, 2024 ~ Jul. 10, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF DYNAMIC FREQUENCY SELECTION TEST	4
1 GENERAL DESCRIPTION	5
1.1. Feature of Equipment Under Test	5
1.2. Product Specification of Equipment Under Test	6
1.3. Modification of EUT	6
1.4. Testing Site	6
1.5. Applied Standards	7
1.6. Support Unit used in test configuration and system	7
2 REQUIREMENTS AND PARAMETERS FOR DFS TEST	8
2.1. Summary of Dynamic Frequency Selection Test	8
2.2. Applicability of DFS Requirements	9
2.3. Interference Threshold values, Master or Client incorporating In-Service Monitoring	10
2.4. DFS Response requirement values	10
2.5. Short Pulse Radar Test Waveforms	11
3 CALIBRATION SETUP AND DFS TEST RESULTS	12
3.1. Calibration of Radar Waveform	12
3.2. In-Service Monitoring: Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	16
4 LIST OF MEASURING EQUIPMENT	23
5 MEASUREMENT UNCERTAINTY	24
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FZ460508	Rev. 01	Initial issue of report	Sep. 11, 2024

SUMMARY OF DYNAMIC FREQUENCY SELECTION TEST

UNII	Bandwidth and Channel	Description	Measured	Limit	Result
UNII Band 2-A 5250-5350MHz & UNII Band 2-C 5470-5725MHz	160MHz (CH50) 5250MHz	Channel Move Time	0.790826sec	< 10 sec	Pass
		Channel Closing Transmission time	200ms + 7.2ms (aggregate)	< 200 ms + aggregate of 60 ms over remaining 10 s period	Pass
		Non-Occupancy Period and Client Beacon Test	No transmission or Beacons occurred	≥ 30 minutes	Pass
	160MHz (CH114) 5570MHz	Channel Move Time	0.862829sec	< 10 sec	Pass
		Channel Closing Transmission time	200ms + 6.4ms (aggregate)	< 200 ms + aggregate of 60 ms over remaining 10 s period	Pass
		Non-Occupancy Period and Client Beacon Test	No transmission or Beacons occurred	≥ 30 minutes	Pass

Note: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test are required to be performed.

Conformity Assessment Condition:	
1.	The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2.	The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:	
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.	

1 General Description

1.1. Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B2
FCC ID	UZ7EM45B2
IMEI Code	350854420029205
HW Version	EV2.5
SW Version	13-32-02.00-TG-U06-STD-ATH-04
MFD	02AUG24
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01

1.2. Product Specification of Equipment Under Test

Product Specification subjective to this standard	
DFS Function	Client without radar detection function
Tx/Rx Channel Frequency Range	5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
EUT support WLAN function	802.11a 802.11n HT20/HT40 802.11ac VHT20/VHT40/VHT80/VHT160 802.11ax HE20/HE40/HE80/HE160
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM/1024QAM)

Note: the device does not support 11ax channel puncturing.

1.3. Modification of EUT

No modifications are made to the EUT during all test items.

1.4. Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	DFS01-KS	CN1257	314309

1.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.6. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	HW / FW Version	Power Cord
1.	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00	FW: 3.0.0.4.384_4730-g8g74d3c	Unshielded, 1.8 m
2.	Notebook	Lenovo	Edge E335	PPD-AR5B95	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2 Requirements and Parameters for DFS Test

2.1. Summary of Dynamic Frequency Selection Test

Bandwidth and Channel	Test Items	Limit
160MHz 5250MHz (CH50)		
160MHz (CH50) 5250MHz	Channel Move Time	< 10 sec
	Channel Closing Transmission time	< 200 ms + aggregate of 60 ms over remaining 10 s period
	Non-Occupancy Period and Client Beacon Test	≥ 30 minutes
160MHz 5570MHz (CH114)		
160MHz (CH114) 5570MHz	Channel Move Time	< 10 sec
	Channel Closing Transmission time	< 200 ms + aggregate of 60 ms over remaining 10 s period
	Non-Occupancy Period and Client Beacon Test	≥ 30 minutes

2.2. Applicability of DFS Requirements

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note

Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

2.3. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

2.4. DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

2.5. Short Pulse Radar Test Waveforms

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.



3 Calibration Setup and DFS Test Results


3.1. Calibration of Radar Waveform

3.1.1 Radar Waveform Calibration Procedure

The Interference Radar Detection Threshold Level that had been taken into account the output power range and antenna gain. The following equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz to measure the type 0 radar waveform. The spectrum analyzer had offset to compensate and RF cable loss.

3.1.2 Test Setup


Conducted Test Setup

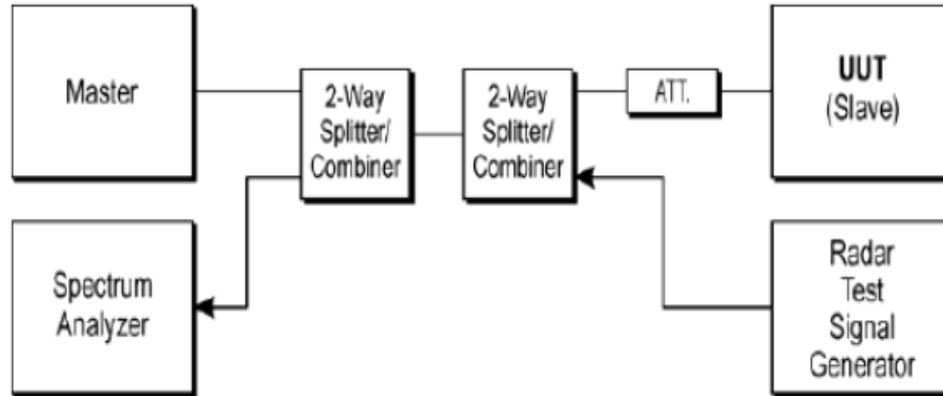

3.1.3 Calibration Deviation

There is no deviation with the original standard.


3.1.4 Radar Waveform Calibration Result

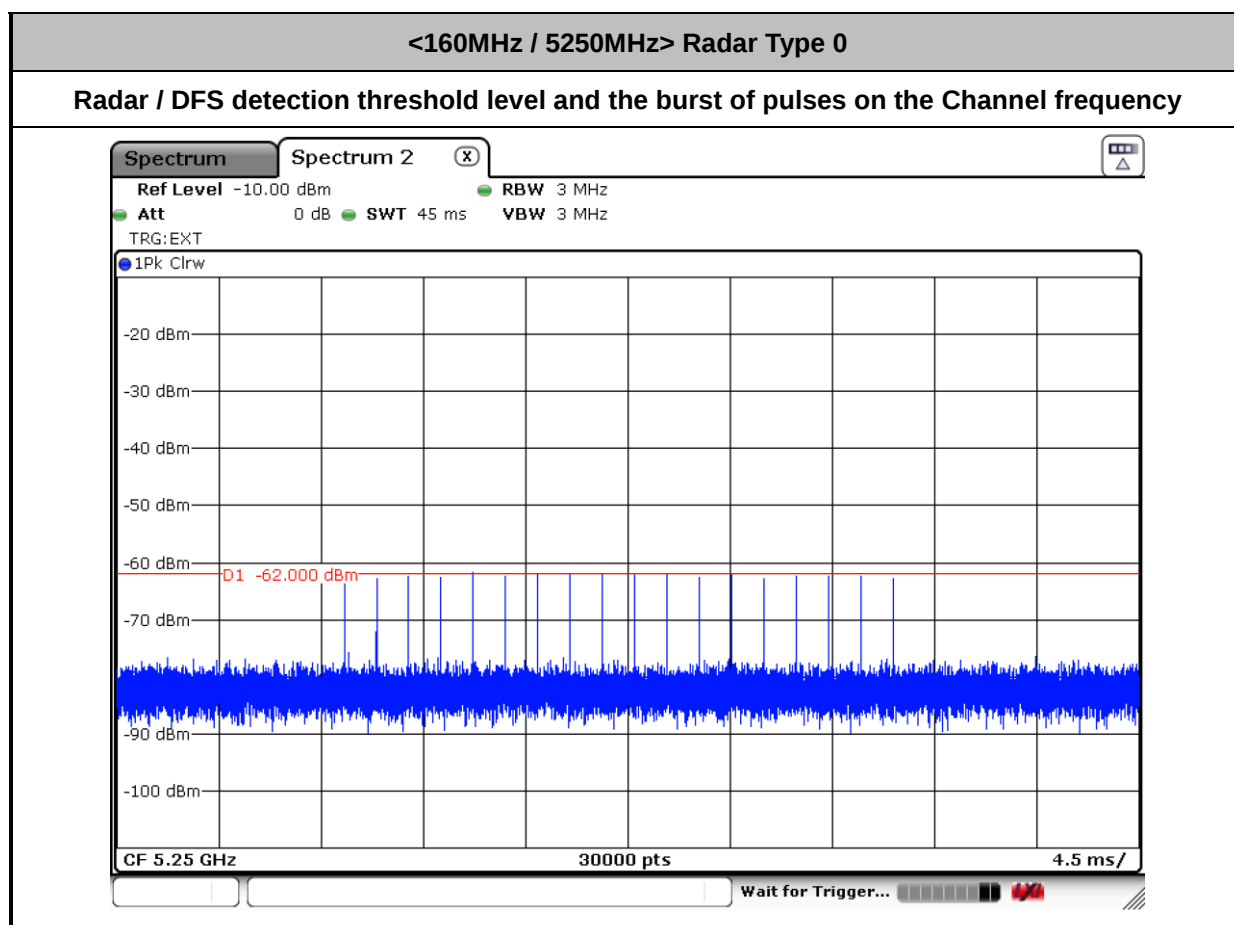



<160MHz / 5570MHz> Radar Type 0

Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

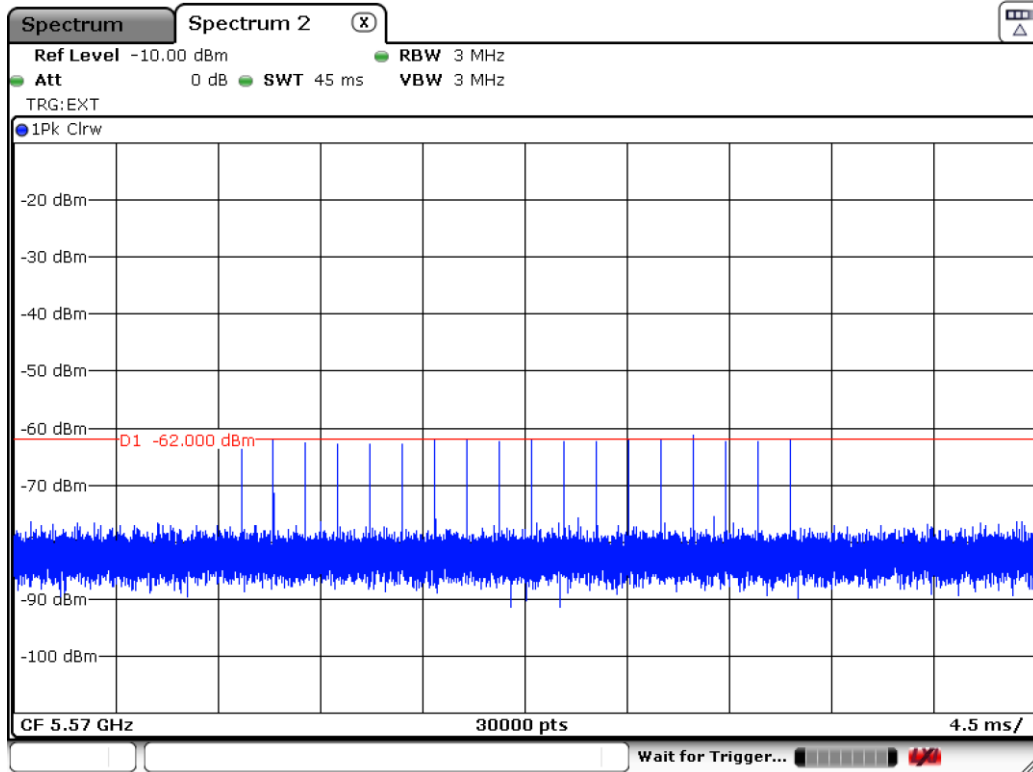



3.2. In-Service Monitoring: Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

3.2.1 Limit of In-Service Monitoring

The EUT has In-Service Monitoring function to continuously monitor the radar signals, If radar is detected, it must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current Channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel. The non-associated Client Beacon Test is during the 30 minutes observation time. The EUT should not make any transmissions in the DFS band after EUT power up.


3.2.2 Test Procedures

1. The radar pulse generator is setup to provide a pulse at frequency that the Master and Client are operating. A type 0 radar pulse with a 1us pulse width and a 1428 us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at a level of approximately -62dBm at the antenna of the Master device.
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. A U-NII device operating as a Client Device will associate with the Master at Channel. The MPEG file "TestFile.mpg" specified by the FCC is streamed from the "file computer" through the Master to the Client Device and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When a radar Burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device. At time T0 the Radar Waveform generator sends a Burst of pulse of the radar waveform at Detection Threshold + 1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). One 12 seconds plot is reported for the Short Pulse Radar Types 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
7. Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: **Dwell (0.4ms) = S (12000ms) / B (30000)**; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: **C (ms) = N X Dwell (0.4 ms)**; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measure the EUT for more than 30 minutes following the channel move time to verify that no transmissions or beacons occur on this Channel.

3.2.3 Test Setup

UUT is a Client without Radar detection and Radar Test Waveforms are injected into the Master.

Conducted Test Setup

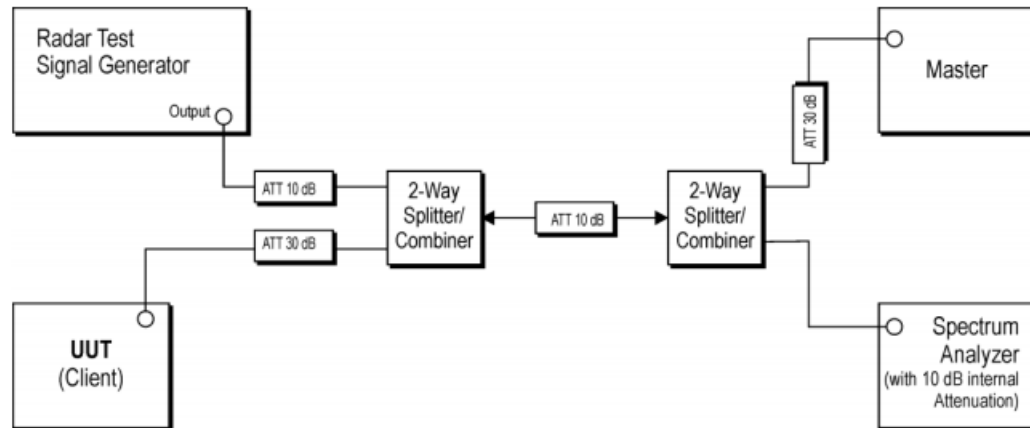

3.2.4 Test Deviation

There is no deviation with the original standard.



3.2.5 Result of Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test


Test Mode :	Client without radar detection	Temperature :	22.1°C
Test Engineer :	Eloise	Relative Humidity :	41%

BW / Channel	Test Item	Test Result	Limit	Pass/Fail
160MHz / 5250MHz	Channel Move Time	0.790826sec	< 10s	Pass
	Channel Closing Transmission Time	200ms + 7.2ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30 min	≥ 30 min	Pass
160MHz / 5570MHz	Channel Move Time	0.862829sec	< 10s	Pass
	Channel Closing Transmission Time	200ms + 6.4ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30 min	≥ 30 min	Pass

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.




3.2.6 Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test Plots


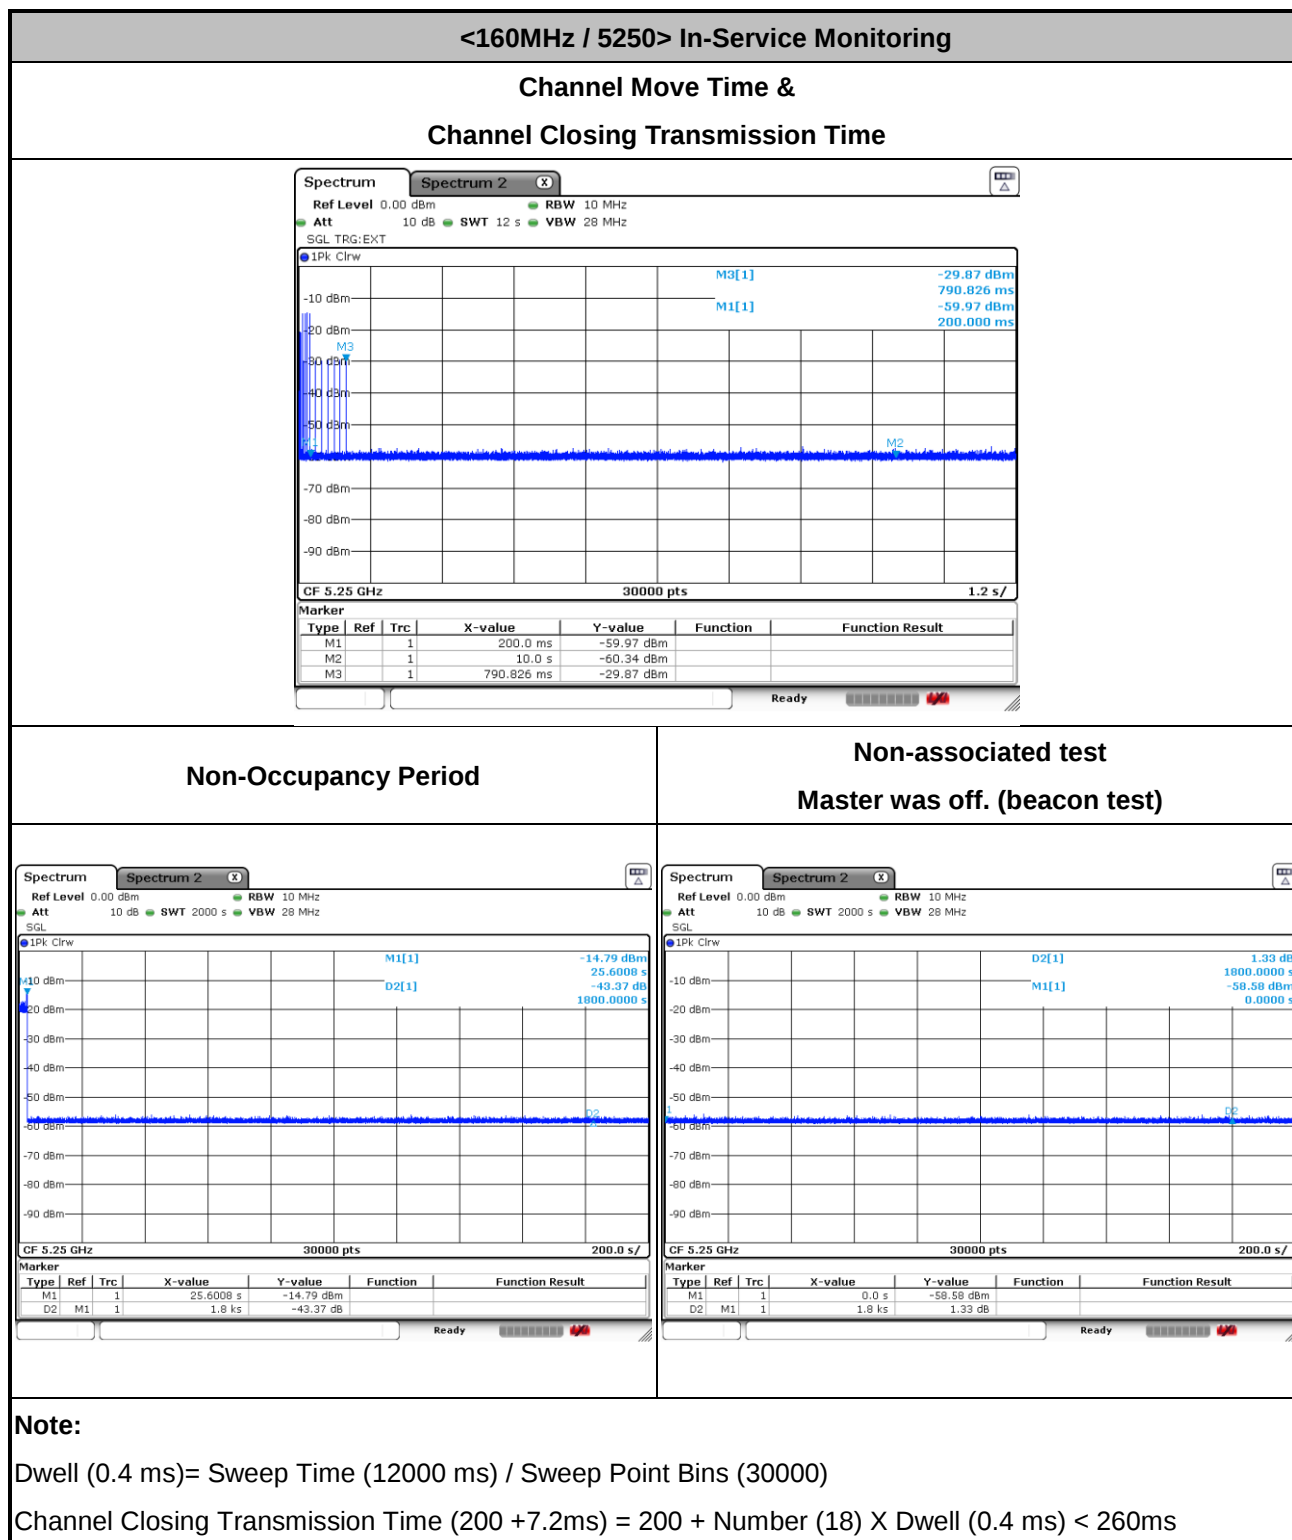




<160MHz / 5570> In-Service Monitoring

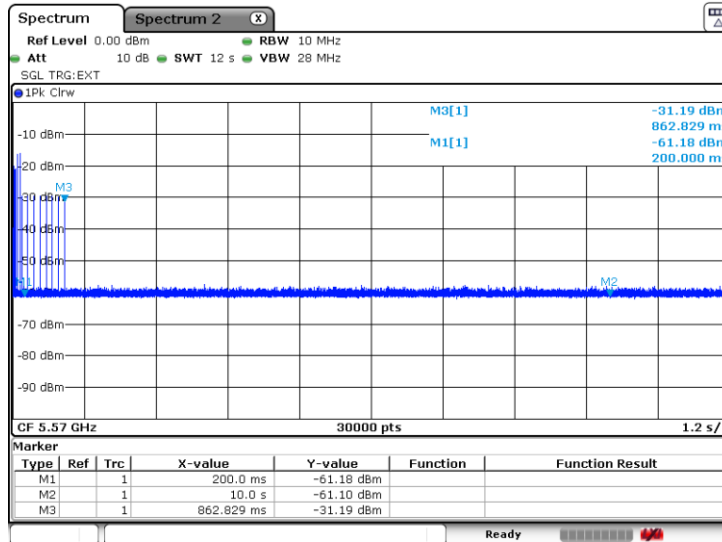Channel Move Time &
Channel Closing Transmission Time

Non-Occupancy Period

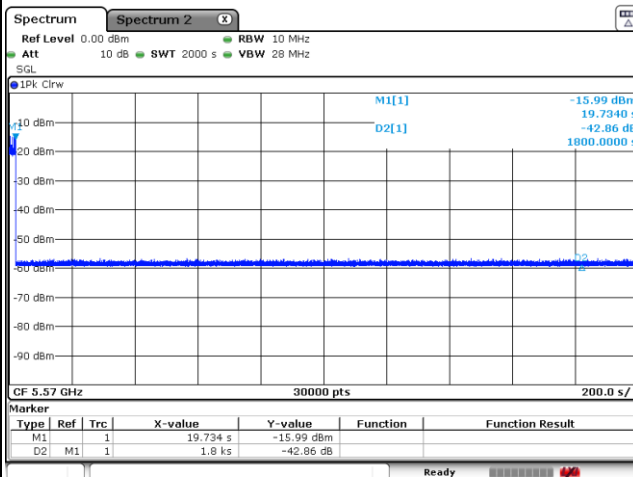
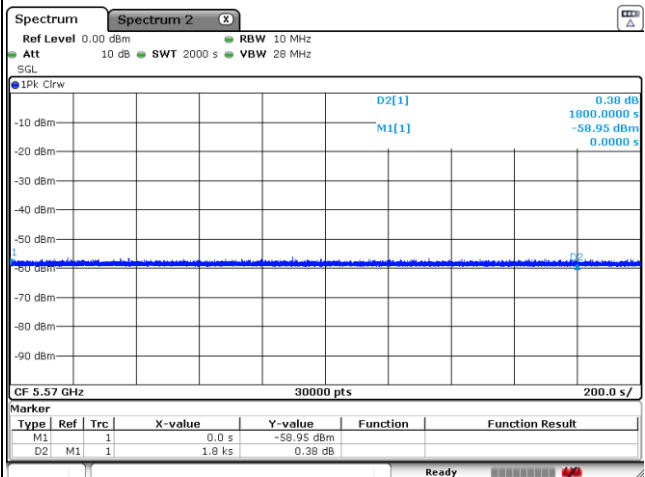
Non-associated test
Master was off. (beacon test)

Note:

Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)

Channel Closing Transmission Time (200 +6.4ms) = 200 + Number (16) X Dwell (0.4 ms) < 260ms

3.2.7 Data Traffic and Noise Floor Plots

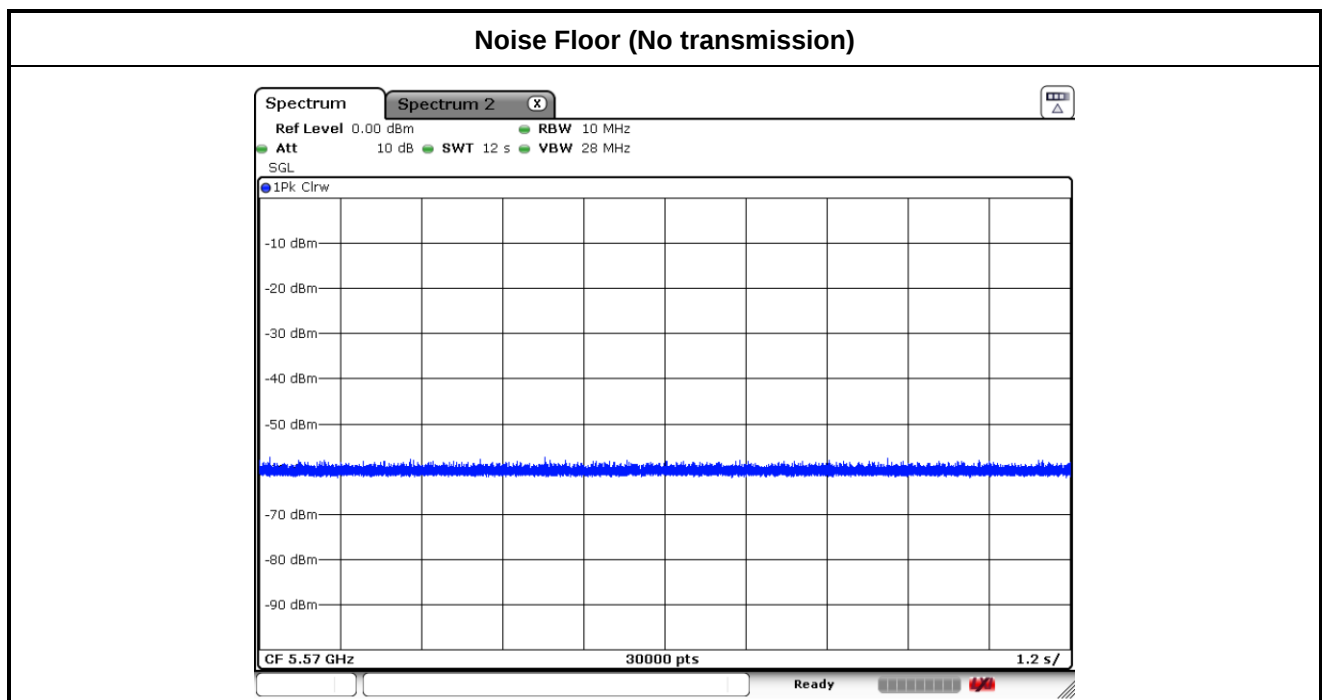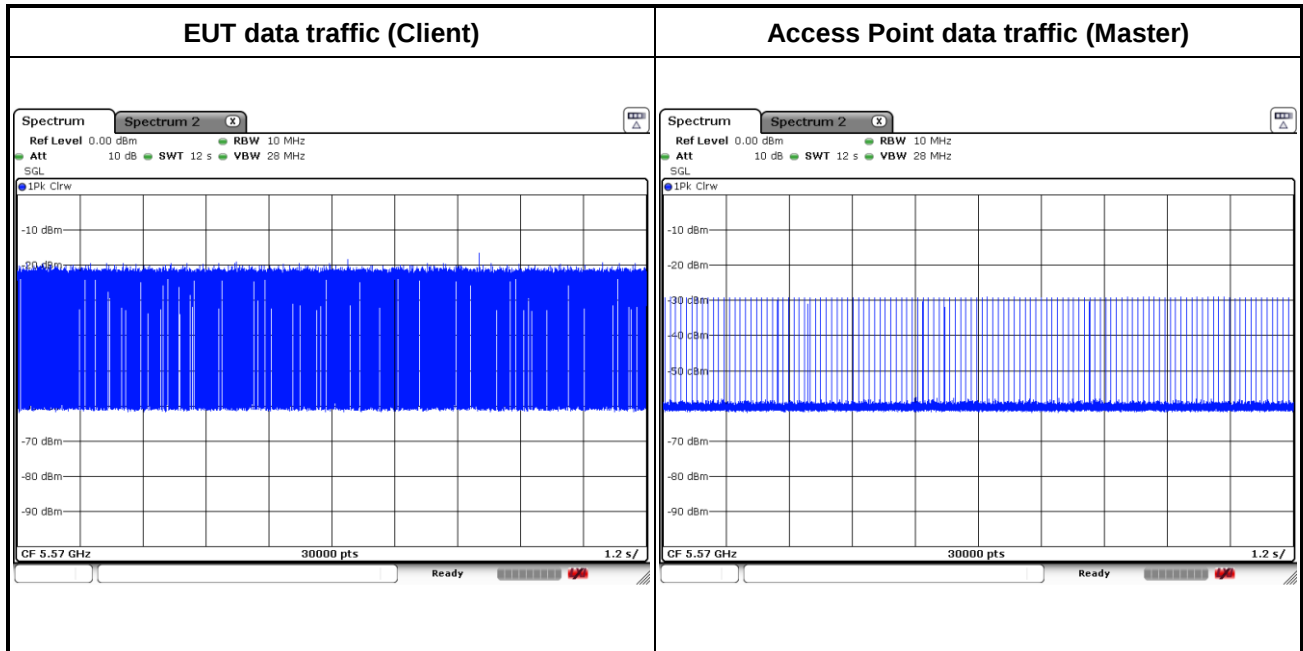



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Jun. 08, 2024 ~Jul. 10, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Jun. 08, 2024 ~Jul. 10, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr 17, 2024	Jun. 08, 2024 ~Jul. 10, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Jun. 08, 2024 ~Jul. 10, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

----- THE END -----