


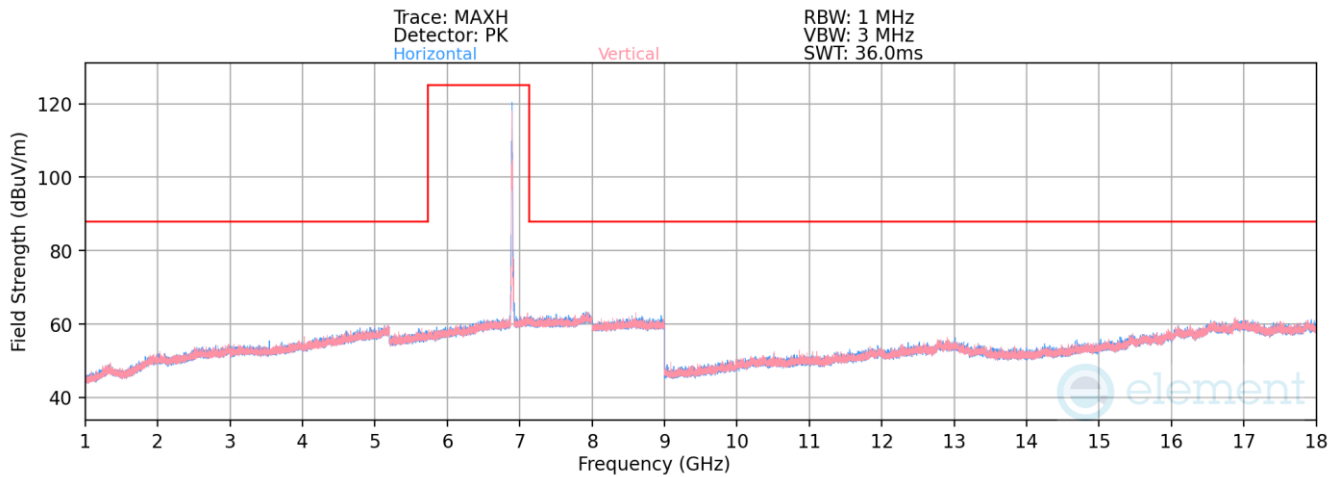

Plot 7-1606. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 189 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	H	-	-	-86.40	21.78	42.38	68.23	-25.85
13790.00	Peak	H	-	-	-74.60	21.78	54.18	88.23	-34.05

Table 7-193. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 429 of 600

V 10.5 12/15/2021

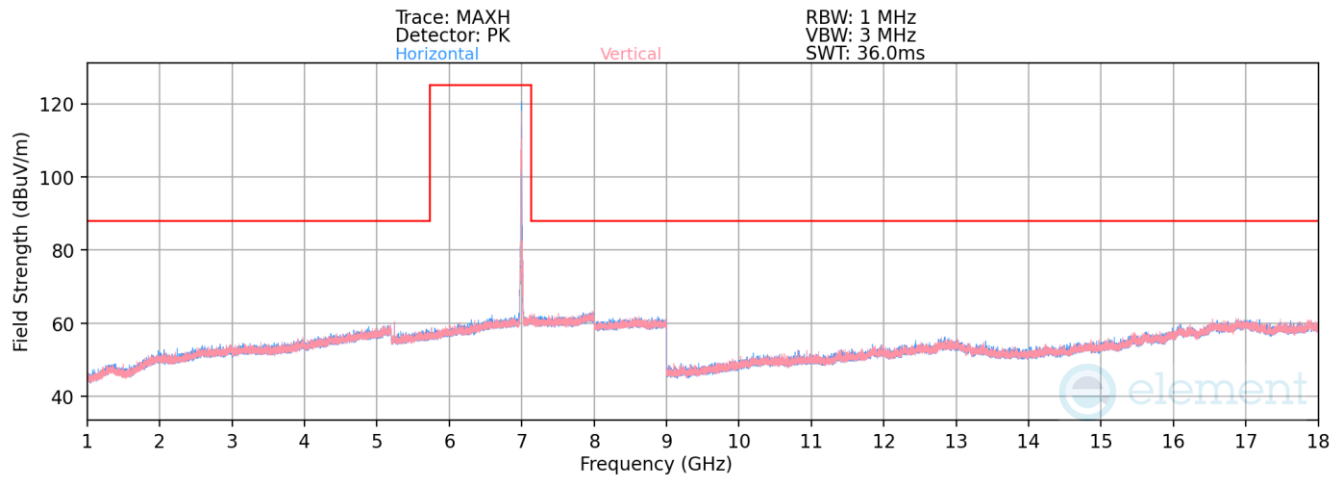

Plot 7-1607. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 209 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5245.00	Average	V	121	163	-75.91	20.25	51.34	68.23	-16.89
5245.00	Peak	V	121	163	-65.43	20.25	61.82	88.23	-26.41
13990.00	Average	H	-	-	-86.64	21.77	42.13	68.23	-26.10
13990.00	Peak	H	-	-	-74.33	21.81	54.48	88.23	-33.75

Table 7-194. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 430 of 600

V 10.5 12/15/2021

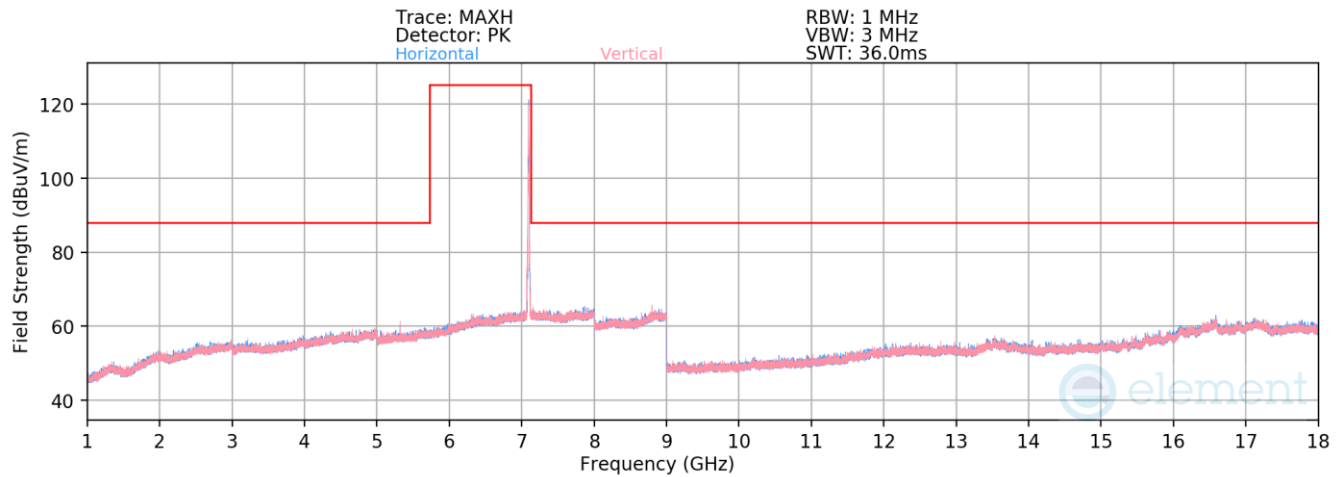

Plot 7-1608. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 229 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
5322.00	Average	V	125	159	-71.64	19.94	55.30	68.23	-12.93
5322.00	Peak	V	125	159	-65.11	19.94	61.83	88.23	-26.40
14190.00	Average	H	-	-	-85.96	22.53	43.57	68.23	-24.66
14190.00	Peak	H	-	-	-74.02	22.53	55.51	88.23	-32.72


Table 7-195. Radiated Spurious Emission Measurements Antenna 4a – RU26

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 431 of 600

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

RU242

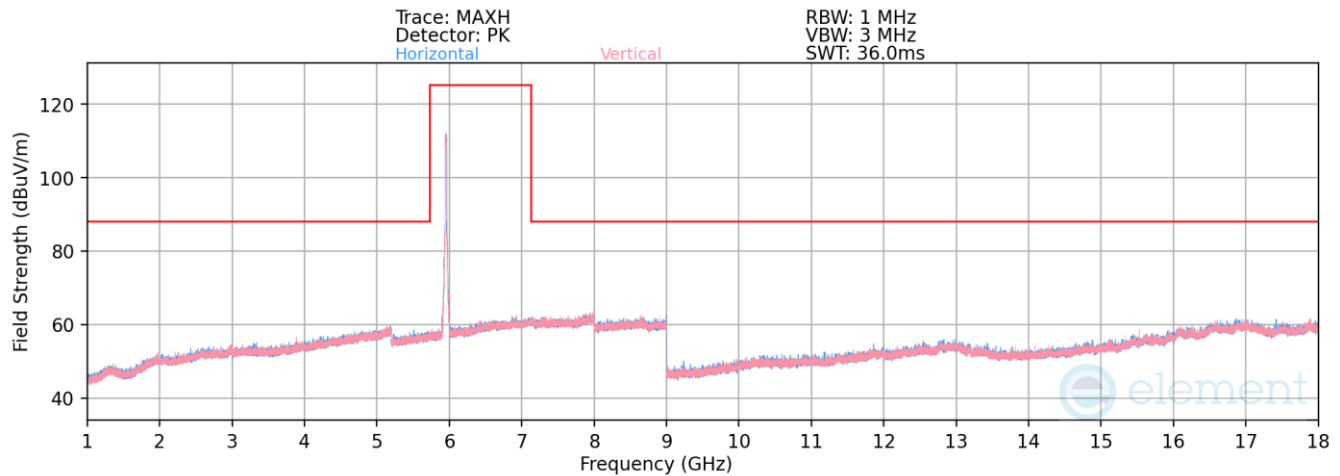

Plot 7-1609. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 1 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11910.00	Average	H	-	-	-85.67	20.35	41.68	53.98	-12.30
*	11910.00	Peak	H	-	-	-74.16	20.35	53.19	73.98	-20.79
*	17865.00	Average	H	-	-	-86.16	22.53	43.37	53.98	-10.61
*	17865.00	Peak	H	-	-	-74.70	22.53	54.83	73.98	-19.15

Table 7-196. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 432 of 600

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

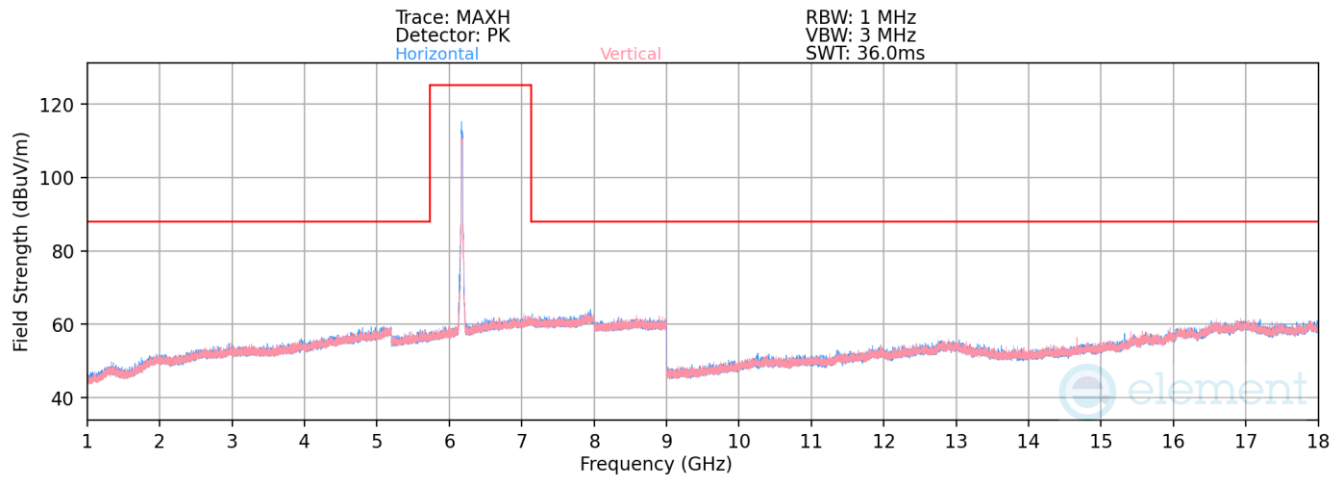

Plot 7-1610. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 45 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	12350.00	Average	H	-	-	-85.84	20.67	41.83	53.98	-12.15
*	12350.00	Peak	H	-	-	-74.49	20.67	53.18	73.98	-20.80

Table 7-197. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 433 of 600

V 10.5 12/15/2021

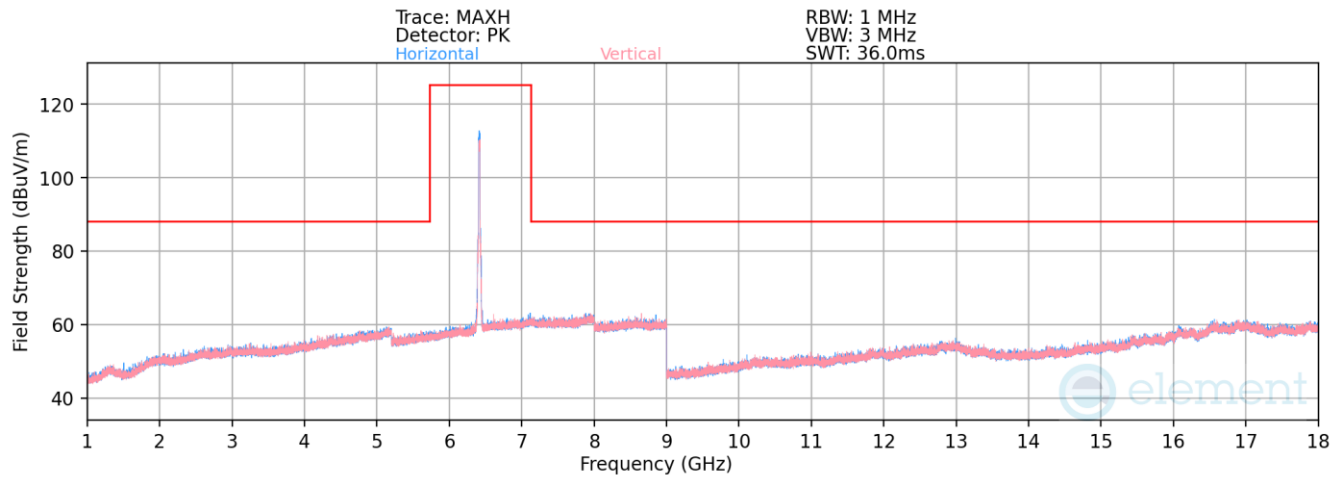

Plot 7-1611. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 93 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-86.25	22.01	42.76	68.23	-25.47
12830.00	Peak	H	-	-	-74.28	21.72	54.44	88.23	-33.79

Table 7-198. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device		Page 434 of 600

V 10.5 12/15/2021

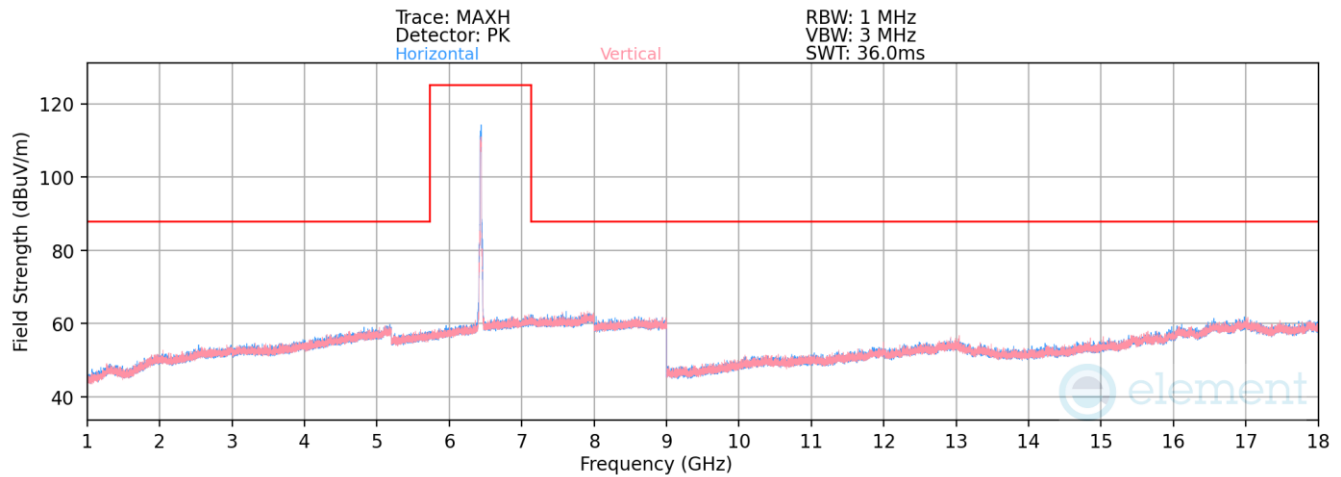

Plot 7-1612. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 97 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-85.85	21.49	42.64	68.23	-25.59
12870.00	Peak	H	-	-	-73.70	21.36	54.66	88.23	-33.57

Table 7-199. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 435 of 600

V 10.5 12/15/2021

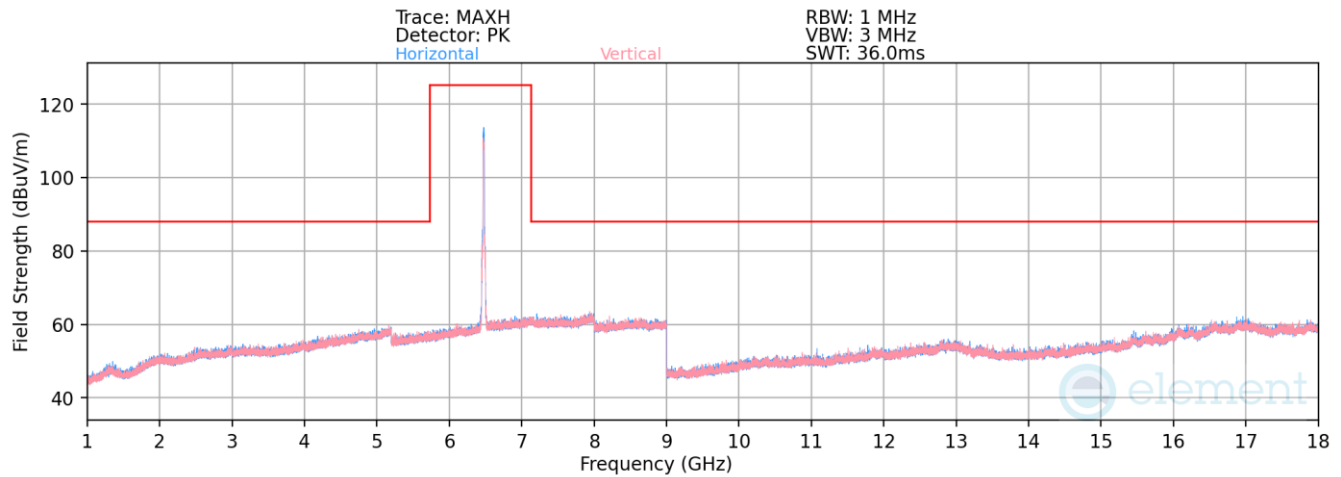

Plot 7-1613. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 105 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.63	21.57	42.94	68.23	-25.29
12950.00	Peak	H	-	-	-73.84	21.47	54.63	88.23	-33.60

Table 7-200. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 436 of 600

V 10.5 12/15/2021

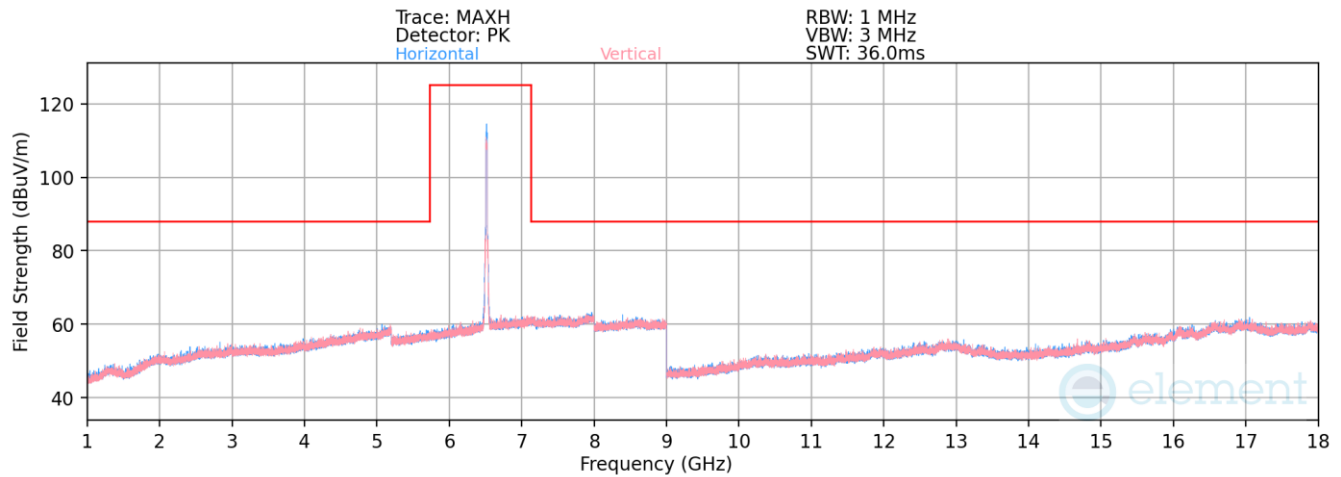

Plot 7-1614. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 113 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.64	21.92	43.28	68.23	-24.95
13030.00	Peak	H	-	-	-73.74	21.92	55.18	88.23	-33.05

Table 7-201. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 437 of 600

V 10.5 12/15/2021

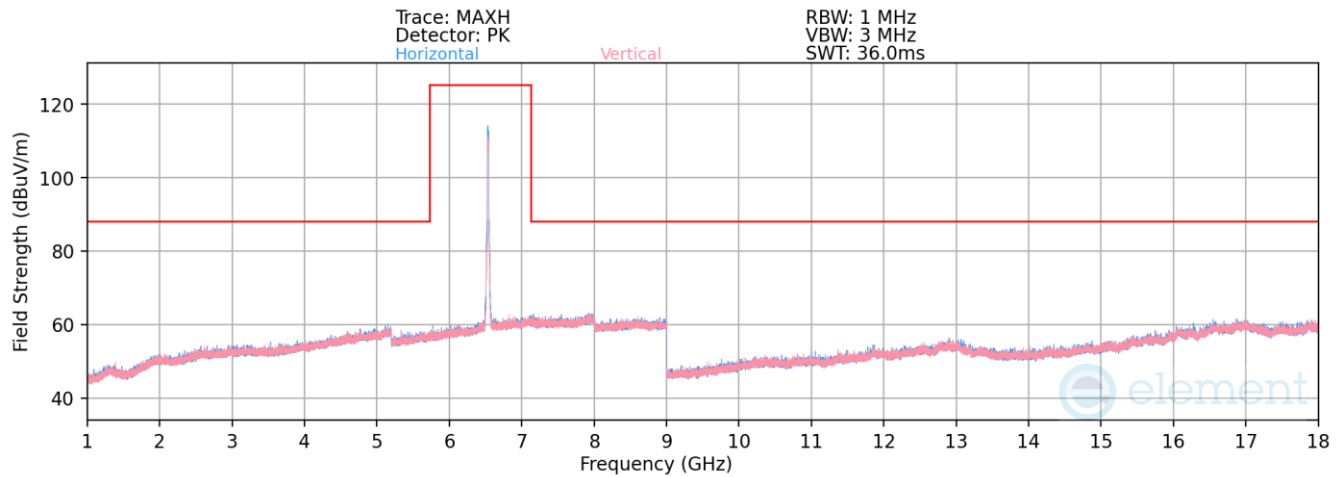

Plot 7-1615. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 117 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.72	21.81	43.09	68.23	-25.14
13070.00	Peak	H	-	-	-74.22	21.81	54.60	88.23	-33.63

Table 7-202. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 438 of 600

V 10.5 12/15/2021

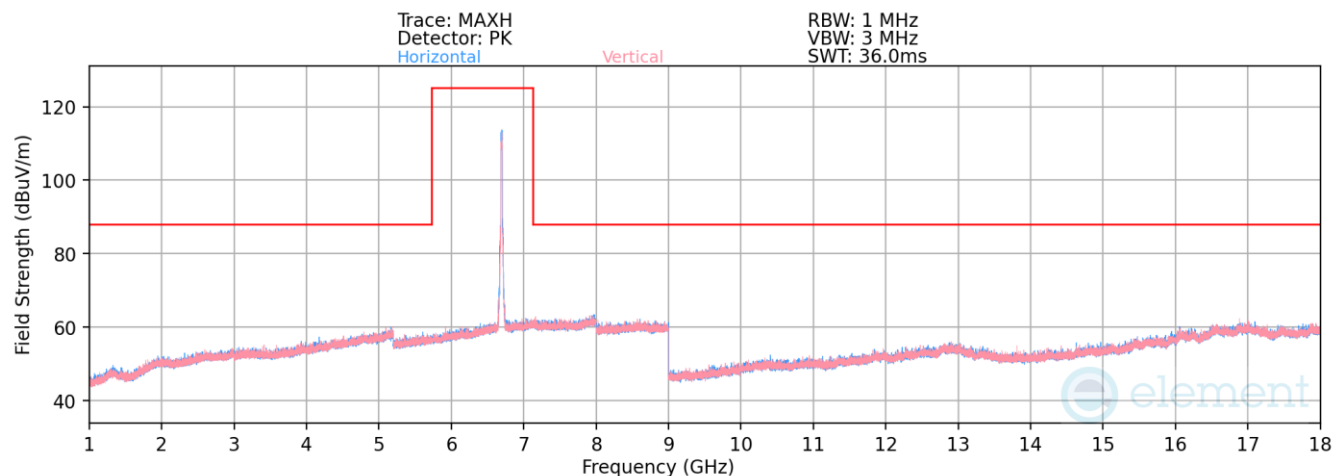

Plot 7-1616. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 149 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-86.10	21.88	42.78	53.98	-11.20
* 13390.00	Peak	H	-	-	-73.59	21.88	55.29	73.98	-18.69

Table 7-203. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 439 of 600

V 10.5 12/15/2021

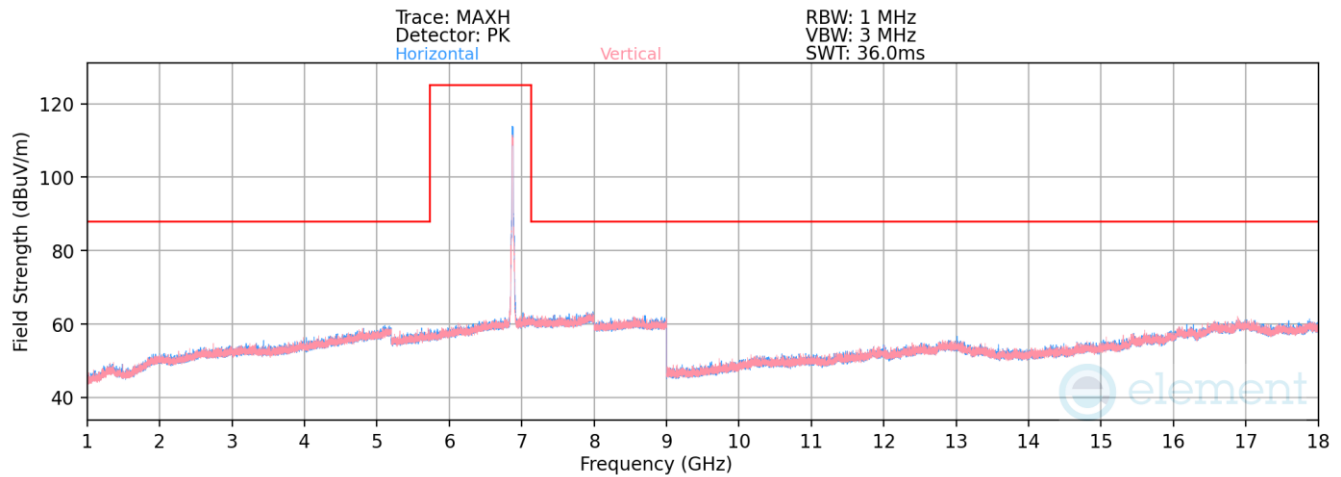

Plot 7-1617. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 185 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-86.28	21.35	42.07	68.23	-26.16
13750.00	Peak	H	-	-	-74.26	21.34	54.09	88.23	-34.14

Table 7-204. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 440 of 600

V 10.5 12/15/2021

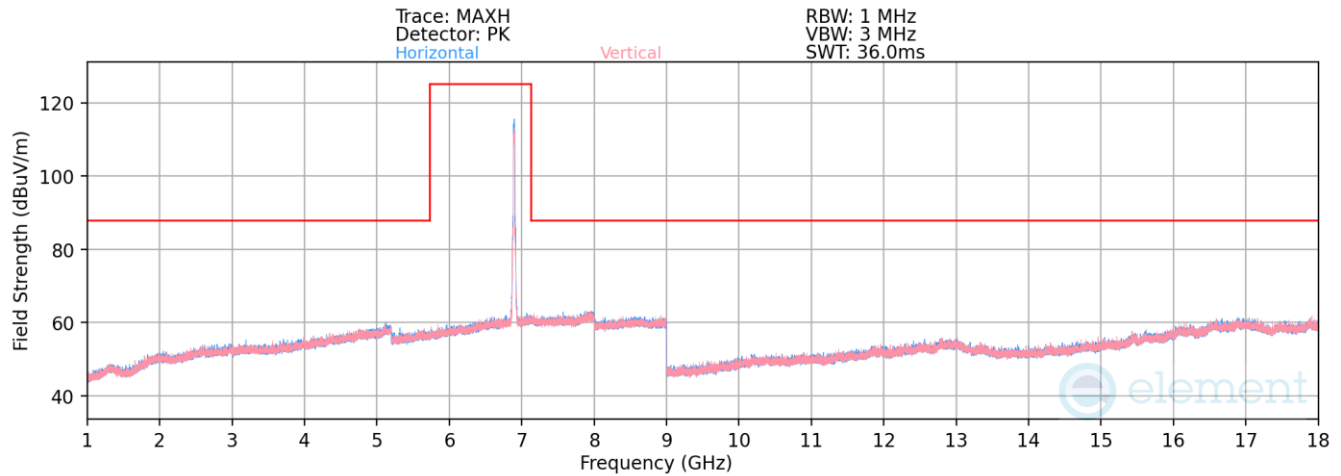

Plot 7-1618. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 189 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-86.21	21.49	42.28	68.23	-25.95
13790.00	Peak	H	-	-	-73.83	21.78	54.95	88.23	-33.28

Table 7-205. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 441 of 600

V 10.5 12/15/2021

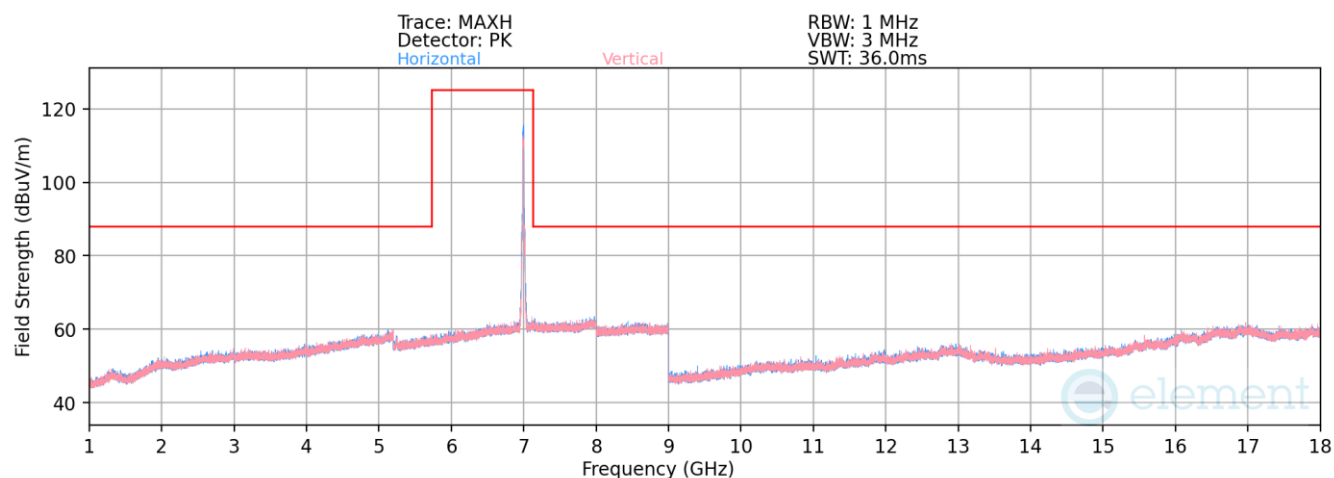

Plot 7-1619. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 209 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-86.69	21.93	42.24	68.23	-25.99
13990.00	Peak	H	-	-	-75.01	21.84	53.82	88.23	-34.41

Table 7-206. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 442 of 600

V 10.5 12/15/2021

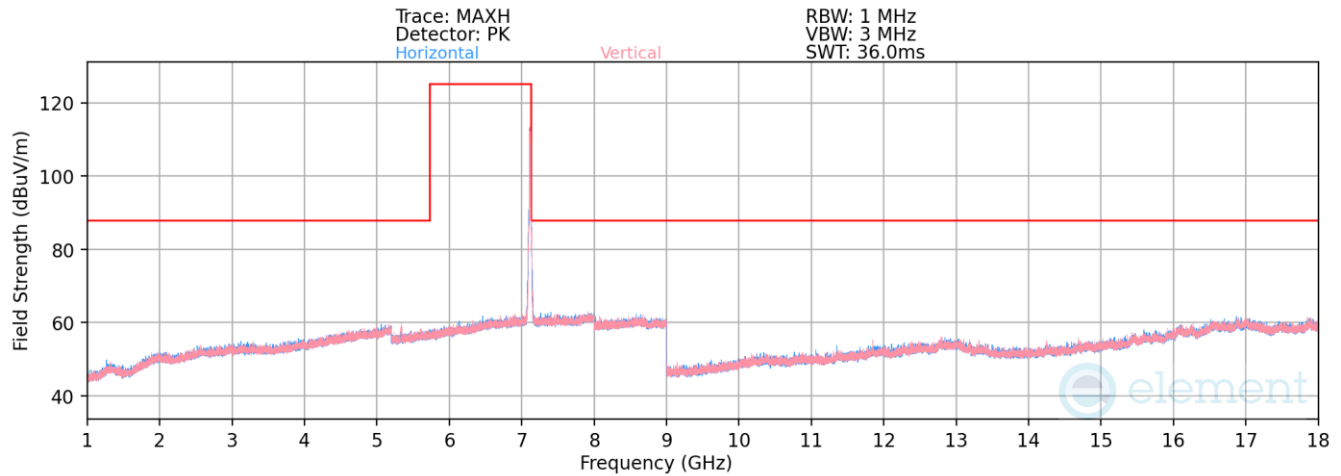

Plot 7-1620. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 233 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
5335.00	Average	V	129	161	-78.38	19.94	48.56	68.23	-19.67
5335.00	Peak	V	129	161	-67.87	19.94	59.07	88.23	-29.16
14230.00	Average	H	-	-	-86.29	22.04	42.75	68.23	-25.48
14230.00	Peak	H	-	-	-75.06	22.31	54.25	88.23	-33.98


Table 7-207. Radiated Spurious Emission Measurements Antenna 4a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 443 of 600

V 10.5 12/15/2021

7.7.3 Antenna 2a Radiated Spurious Emission

RU26

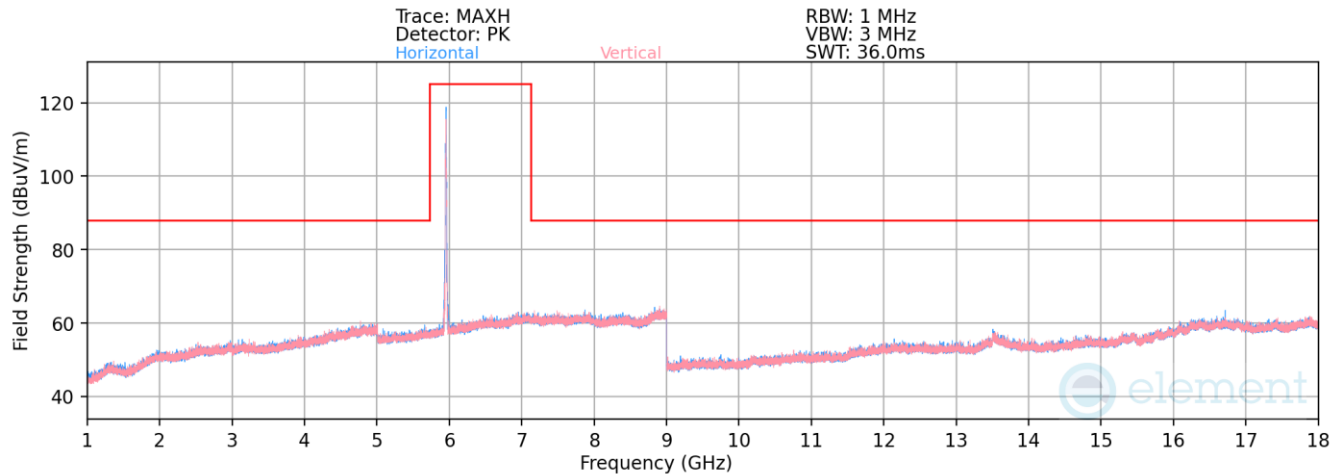

Plot 7-1621. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 1 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11910.00	Average	H	-	-	-84.92	20.05	42.13	53.98	-11.85
*	11910.00	Peak	H	-	-	-73.36	20.35	53.99	73.98	-19.99
*	17865.00	Average	H	-	-	-85.24	22.53	44.30	53.98	-9.68
*	17865.00	Peak	H	-	-	-73.74	22.53	55.79	73.98	-18.19

Table 7-208. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device		Page 444 of 600

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

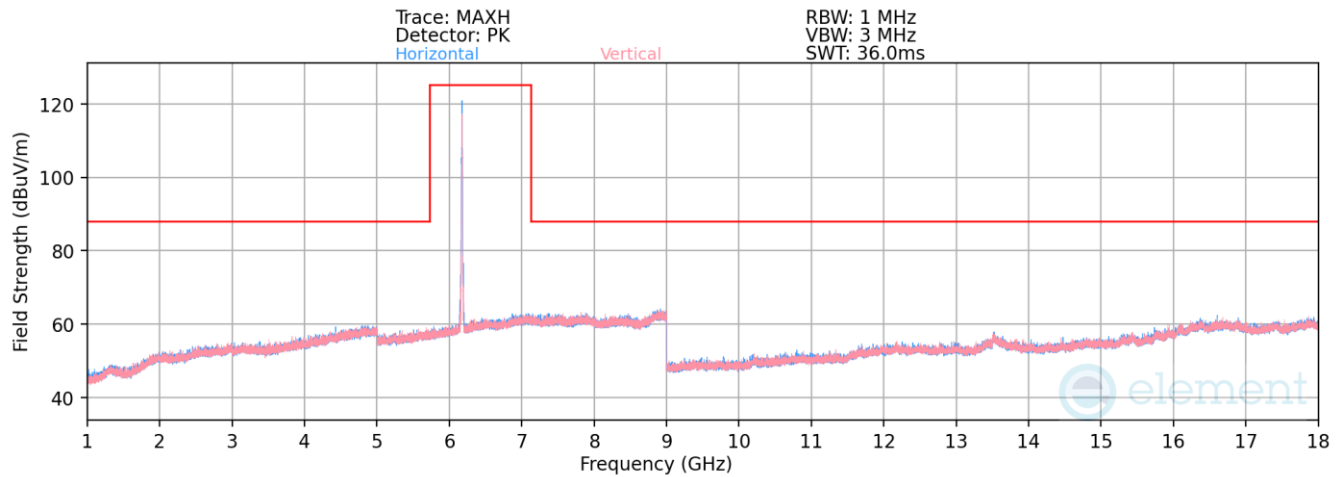

Plot 7-1622. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 45 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-84.98	20.69	42.71	53.98	-11.27
* 12350.00	Peak	H	-	-	-73.50	20.67	54.17	73.98	-19.81

Table 7-209. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 445 of 600

V 10.5 12/15/2021

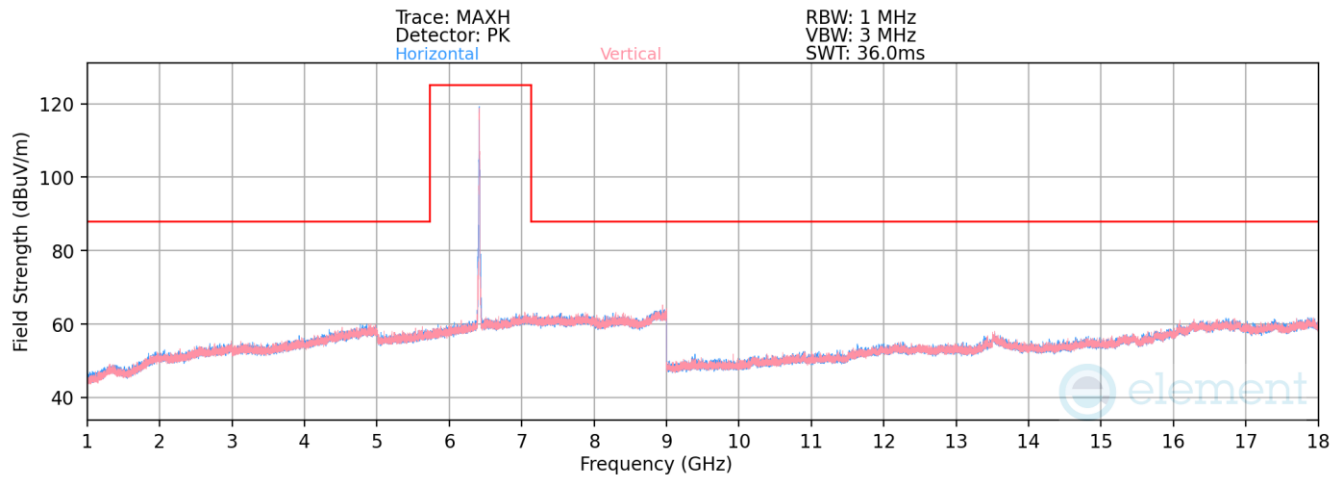

Plot 7-1623. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 93 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-85.67	21.68	43.01	68.23	-25.22
12830.00	Peak	H	-	-	-74.52	21.72	54.21	88.23	-34.02

Table 7-210. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 446 of 600

V 10.5 12/15/2021

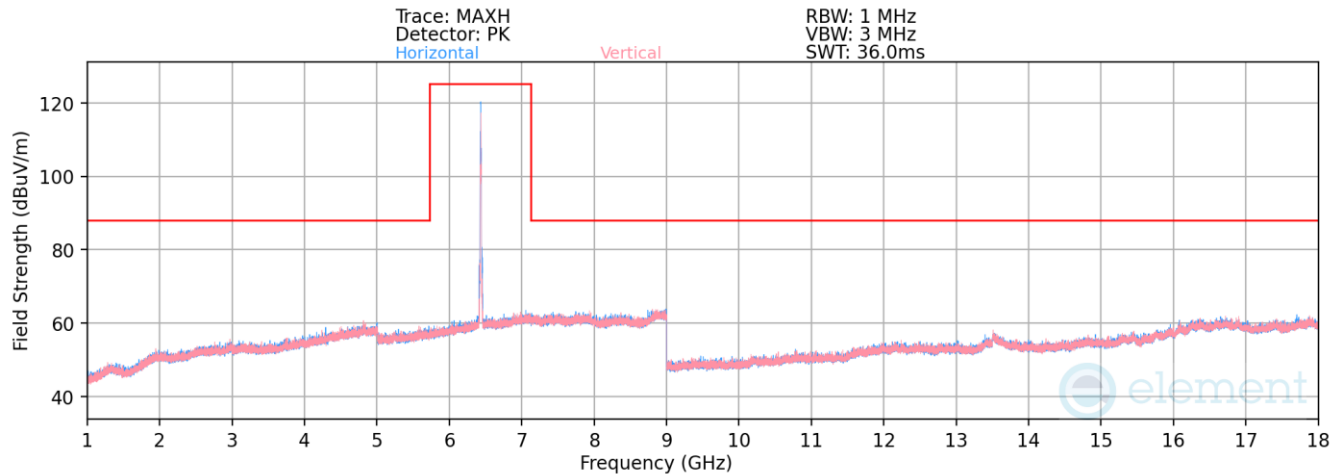

Plot 7-1624. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 97 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-85.72	21.49	42.77	68.23	-25.46
12870.00	Peak	H	-	-	-74.10	21.36	54.26	88.23	-33.97

Table 7-211. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 447 of 600

V 10.5 12/15/2021

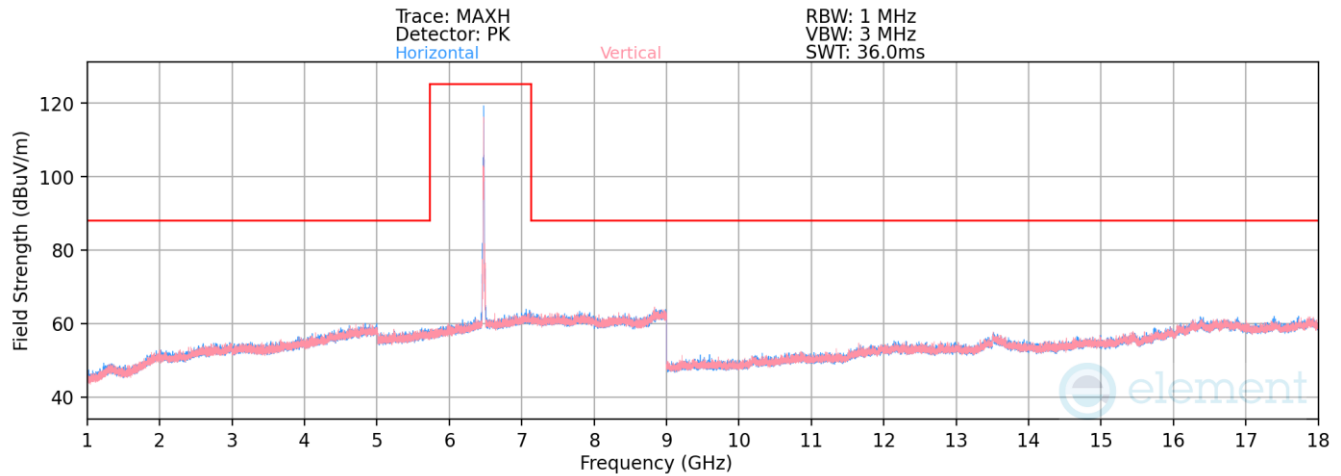

Plot 7-1625. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 105 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.71	21.47	42.76	68.23	-25.47
12950.00	Peak	H	-	-	-74.20	21.56	54.36	88.23	-33.87

Table 7-212. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 448 of 600

V 10.5 12/15/2021

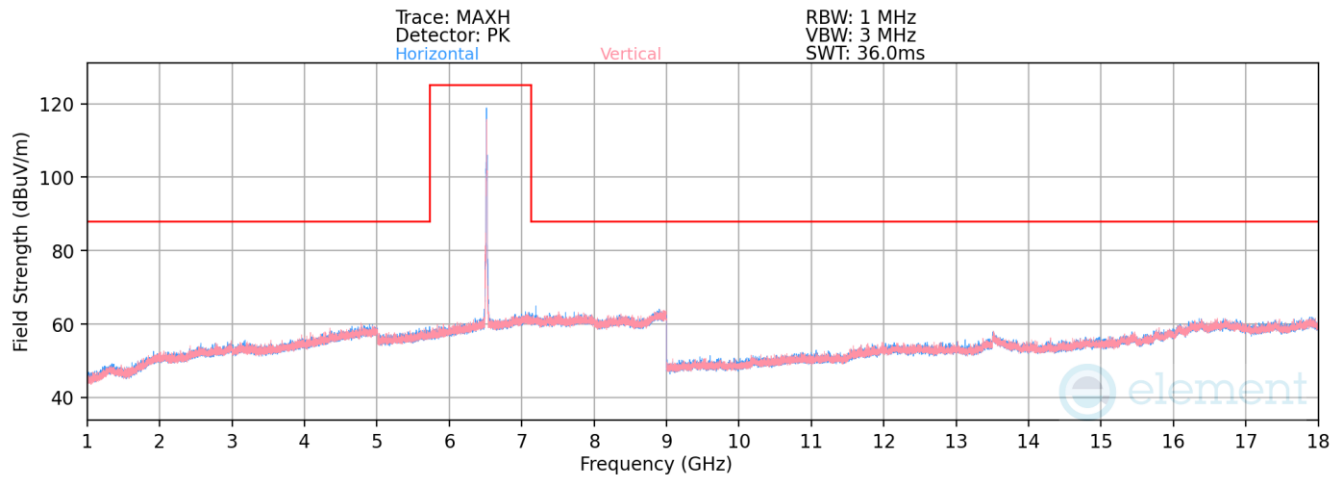

Plot 7-1626. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 113 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.40	21.92	43.52	68.23	-24.71
13030.00	Peak	H	-	-	-73.03	21.84	55.82	88.23	-32.41

Table 7-213. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 449 of 600

V 10.5 12/15/2021

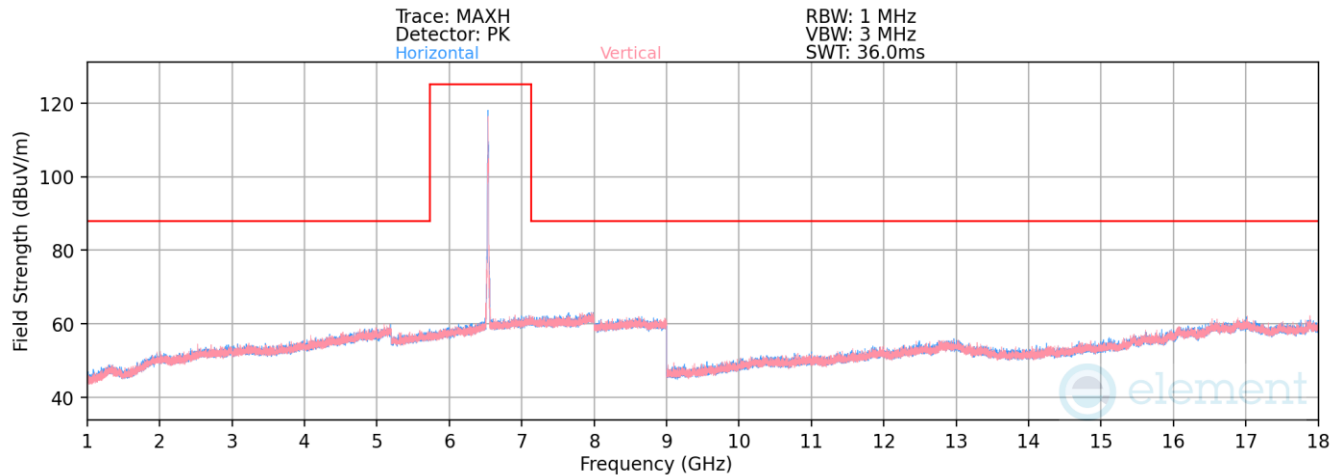

Plot 7-1627. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 117 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.70	21.60	42.90	68.23	-25.33
13070.00	Peak	H	-	-	-74.52	21.60	54.08	88.23	-34.15

Table 7-214. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 450 of 600

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

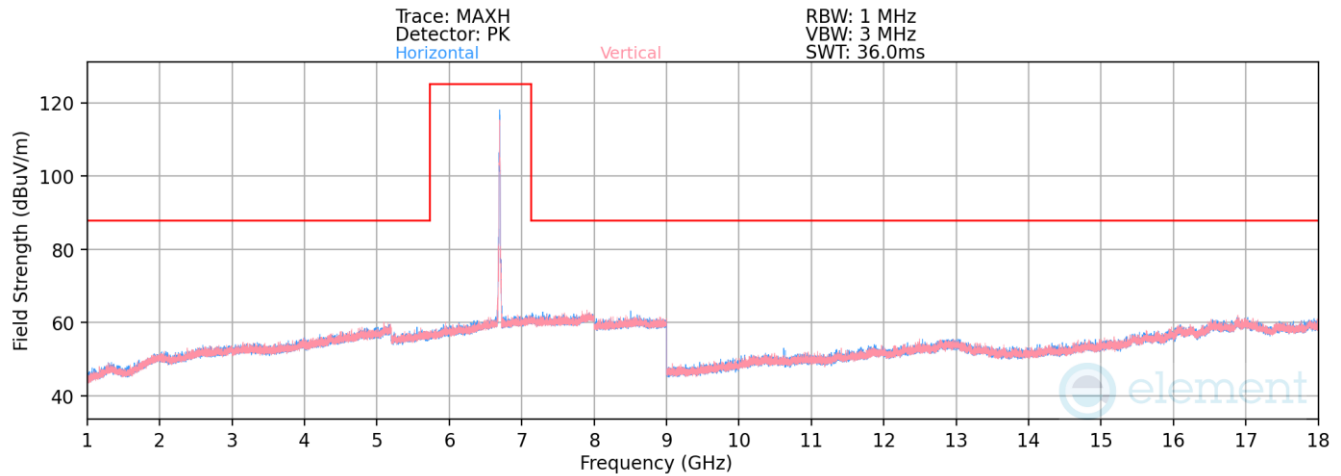

Plot 7-1628. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 149 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-85.99	21.78	42.79	53.98	-11.19
* 13390.00	Peak	H	-	-	-74.43	21.78	54.36	73.98	-19.62

Table 7-215. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 451 of 600

V 10.5 12/15/2021

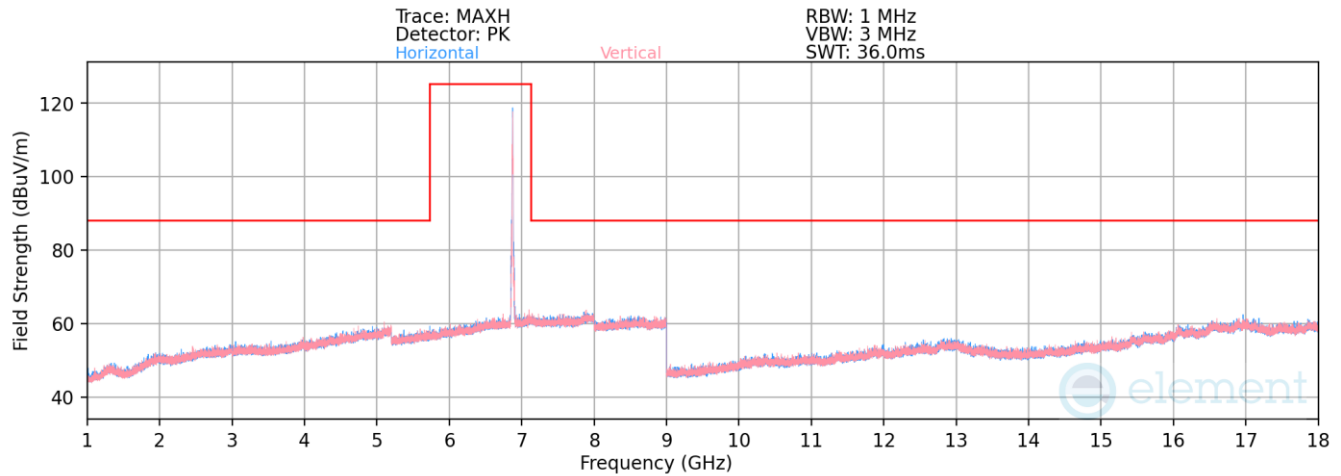

Plot 7-1629. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 185 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-86.24	21.35	42.11	68.23	-26.12
13750.00	Peak	H	-	-	-74.58	21.35	53.77	88.23	-34.46

Table 7-216. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 452 of 600

V 10.5 12/15/2021

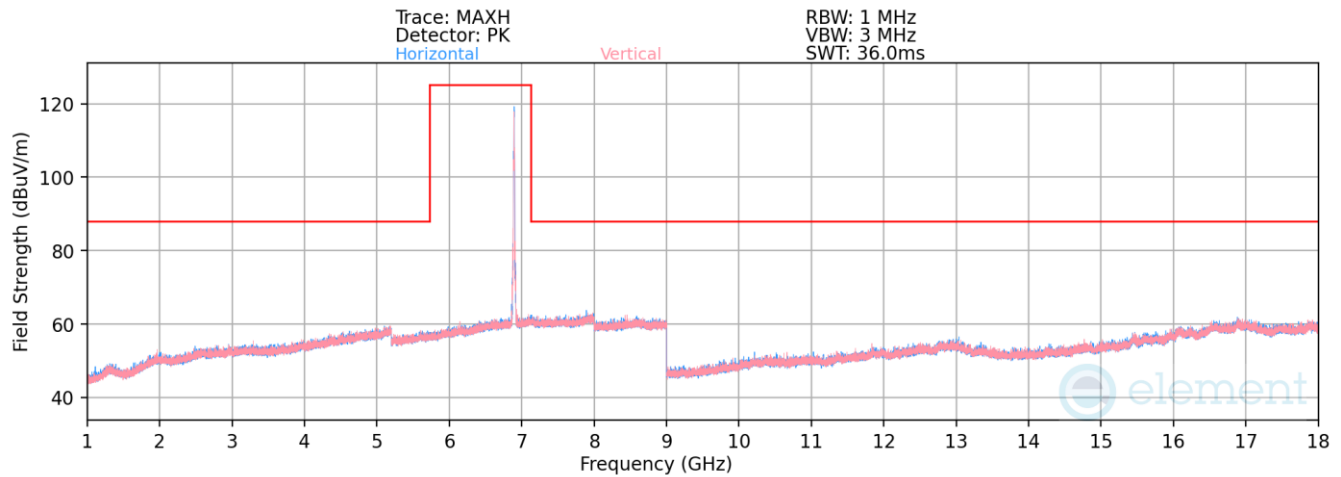

Plot 7-1630. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 189 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-86.32	21.78	42.46	68.23	-25.77
13790.00	Peak	H	-	-	-74.28	21.49	54.21	88.23	-34.02

Table 7-217. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 453 of 600

V 10.5 12/15/2021

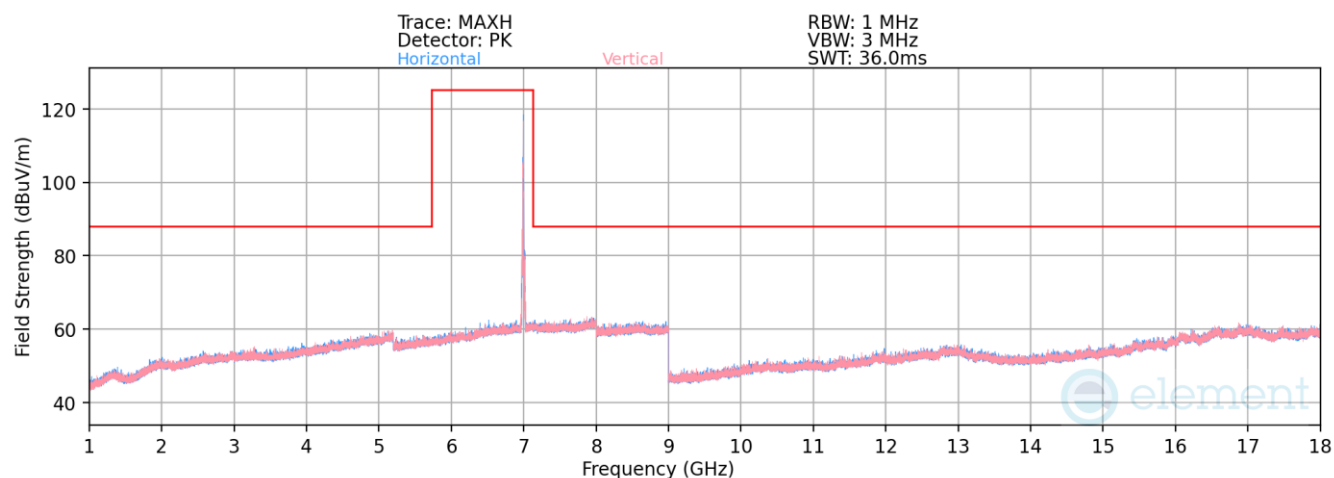

Plot 7-1631. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 209 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-86.60	21.84	42.23	68.23	-26.00
13990.00	Peak	H	-	-	-75.39	21.81	53.42	88.23	-34.81

Table 7-218. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 454 of 600

V 10.5 12/15/2021

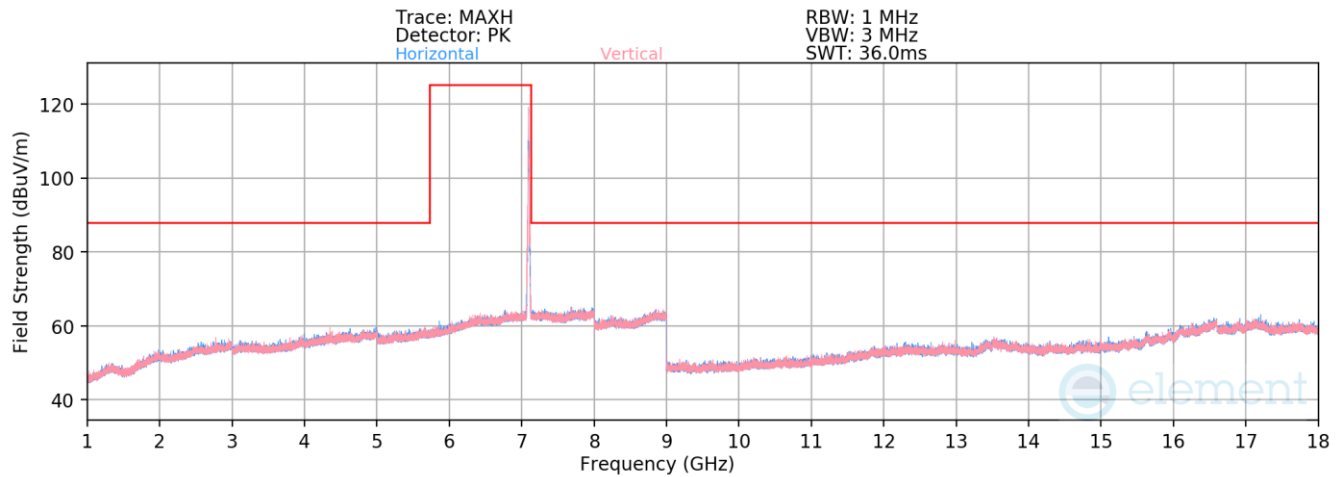

Plot 7-1632. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 229 – RU26)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14190.00	Average	H	-	-	-85.79	22.40	43.62	68.23	-24.61
14190.00	Peak	H	-	-	-74.20	22.40	55.21	88.23	-33.02

Table 7-219. Radiated Spurious Emission Measurements Antenna 2a – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 455 of 600

V 10.5 12/15/2021

RU242

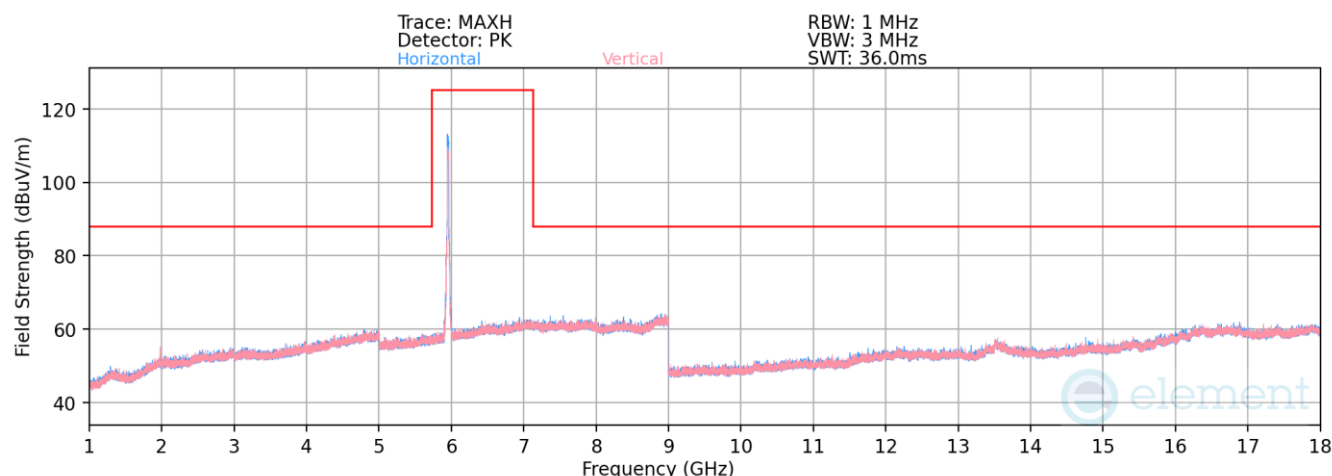

Plot 7-1633. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 1 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11910.00	Average	H	-	-	-84.89	20.01	42.11	53.98	-11.87
*	11910.00	Peak	H	-	-	-72.80	20.05	54.26	73.98	-19.72
*	17865.00	Average	H	-	-	-85.20	22.53	44.33	53.98	-9.65
*	17865.00	Peak	H	-	-	-73.50	22.53	56.03	73.98	-17.95

Table 7-220. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 456 of 600

V 10.5 12/15/2021

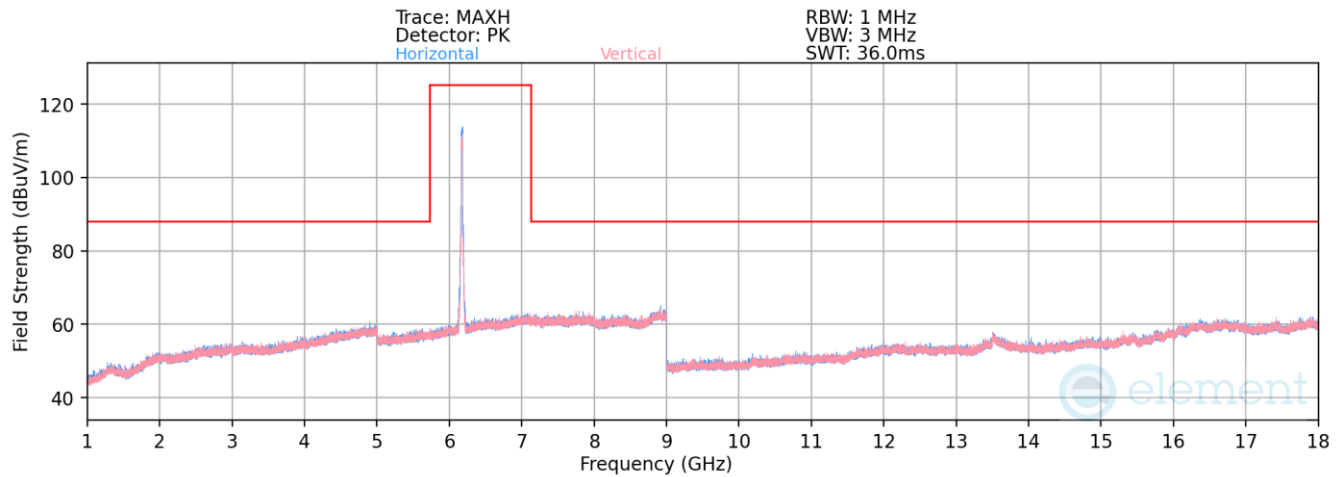

Plot 7-1634. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 45 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	12350.00	Average	H	-	-	-84.92	20.67	42.75	53.98	-11.23
*	12350.00	Peak	H	-	-	-72.91	20.67	54.75	73.98	-19.23

Table 7-221. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 457 of 600

V 10.5 12/15/2021

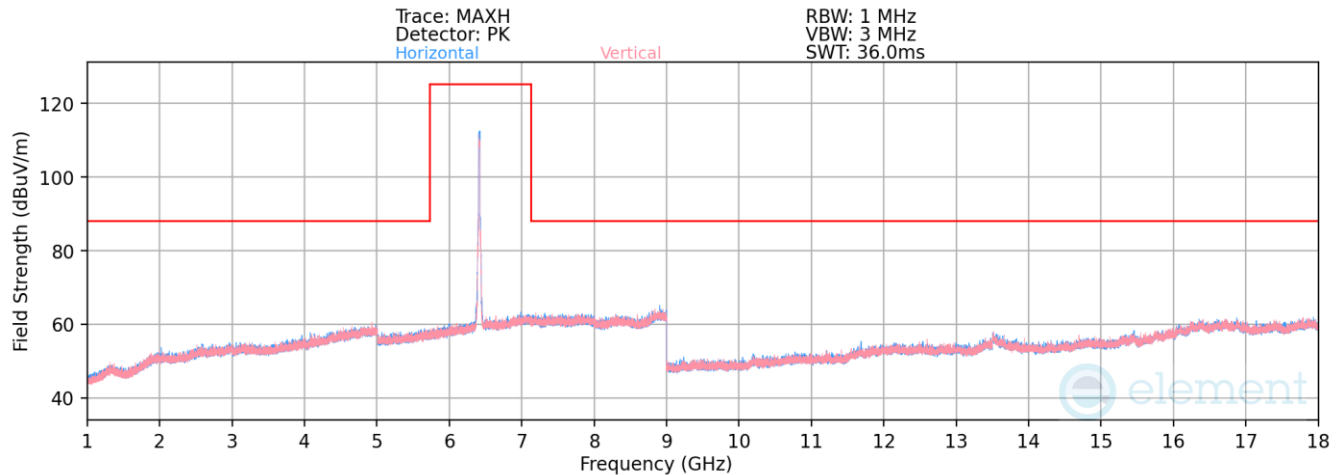

Plot 7-1635. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 93 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-85.80	21.68	42.87	68.23	-25.36
12830.00	Peak	H	-	-	-73.30	21.68	55.38	88.23	-32.85

Table 7-222. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device		Page 458 of 600

V 10.5 12/15/2021

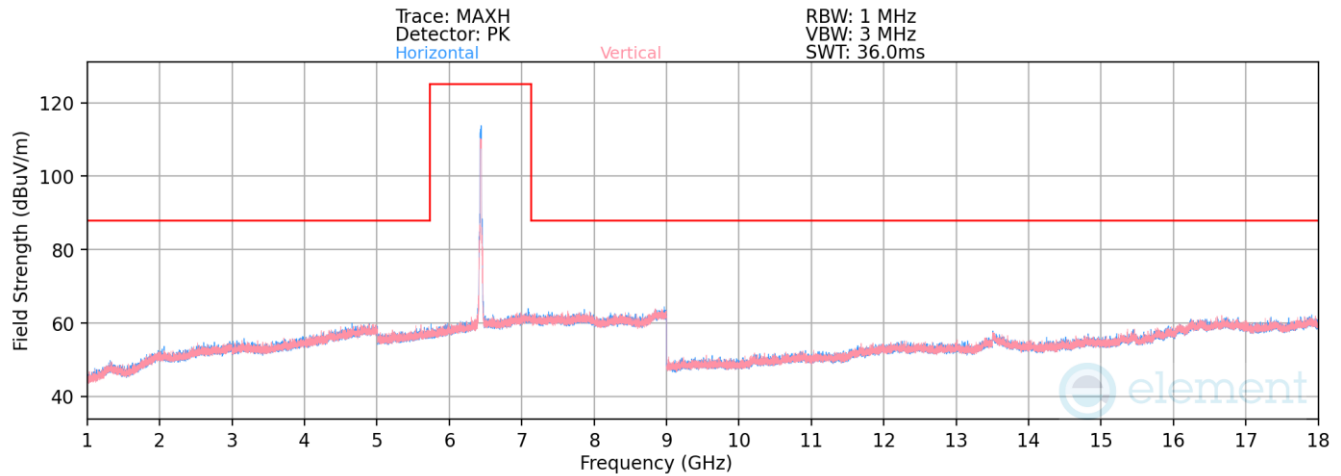

Plot 7-1636. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 97 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.75	21.47	42.72	68.23	-25.51
12950.00	Peak	H	-	-	-73.71	21.47	54.77	88.23	-33.46

Table 7-223. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 459 of 600

V 10.5 12/15/2021

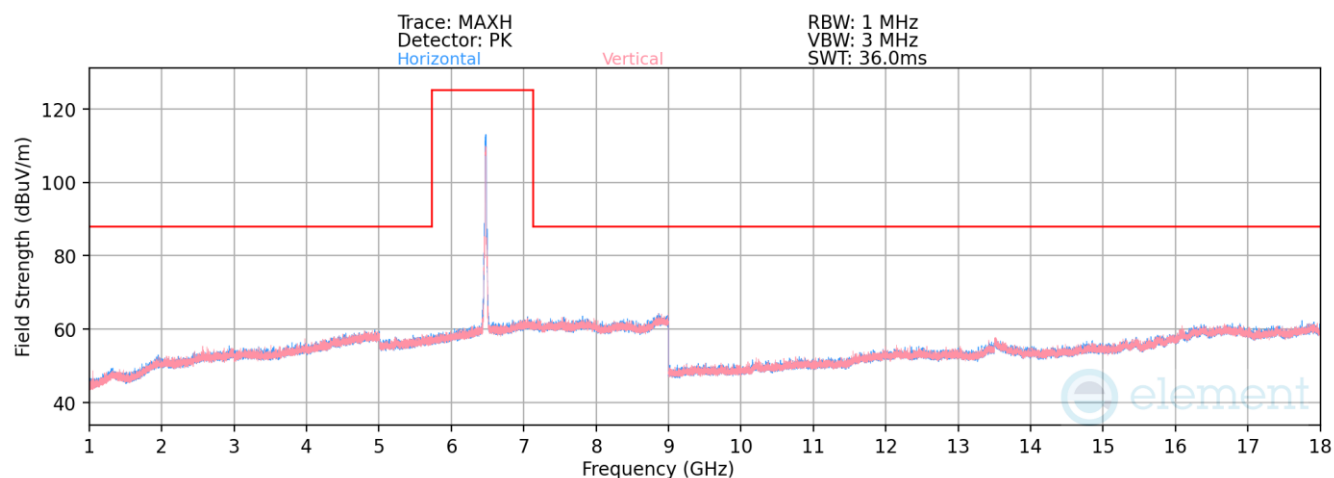

Plot 7-1637. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 105 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.75	21.47	42.72	68.23	-25.51
12950.00	Peak	H	-	-	-73.71	21.47	54.77	88.23	-33.46

Table 7-224. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 460 of 600

V 10.5 12/15/2021

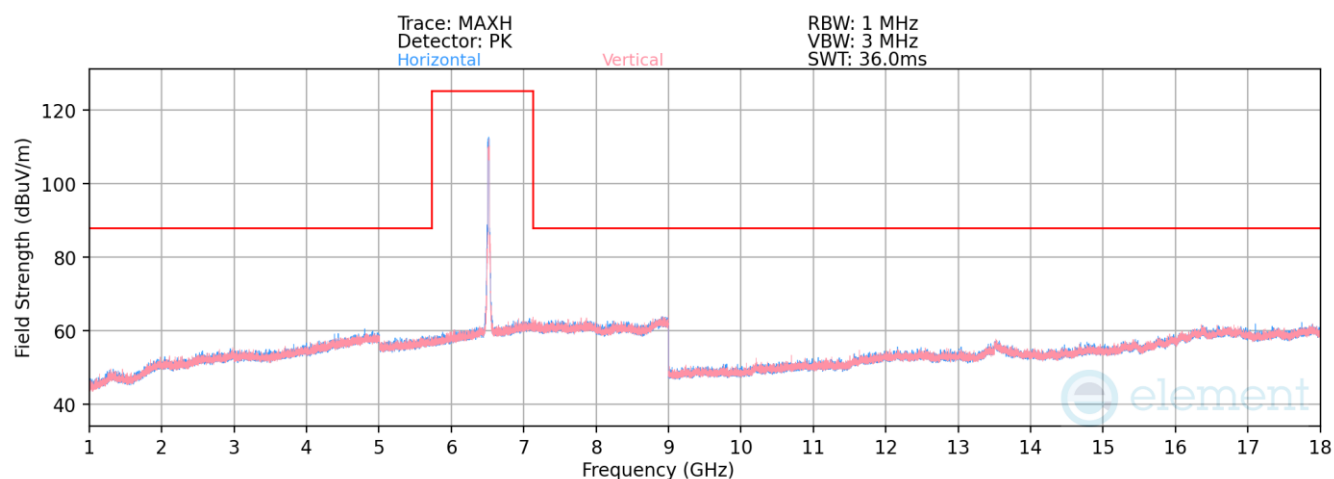

Plot 7-1638. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 113 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.26	21.92	43.67	68.23	-24.56
13030.00	Peak	H	-	-	-73.90	21.89	54.99	88.23	-33.24

Table 7-225. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 461 of 600

V 10.5 12/15/2021

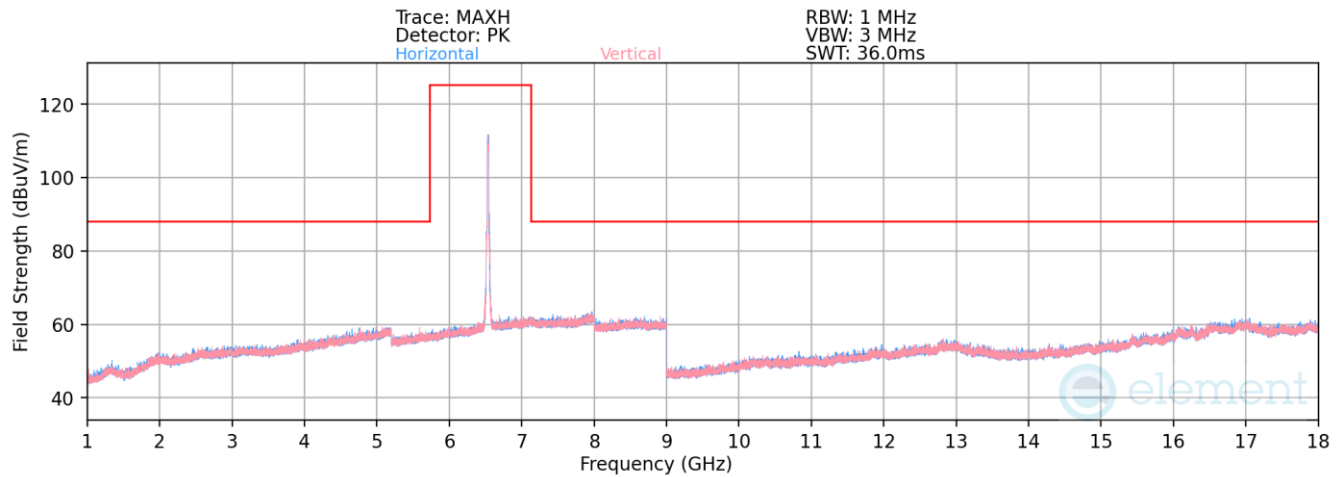

Plot 7-1639. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 117 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.77	21.60	42.83	68.23	-25.40
13070.00	Peak	H	-	-	-74.26	21.60	54.34	88.23	-33.89

Table 7-226. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 462 of 600

V 10.5 12/15/2021

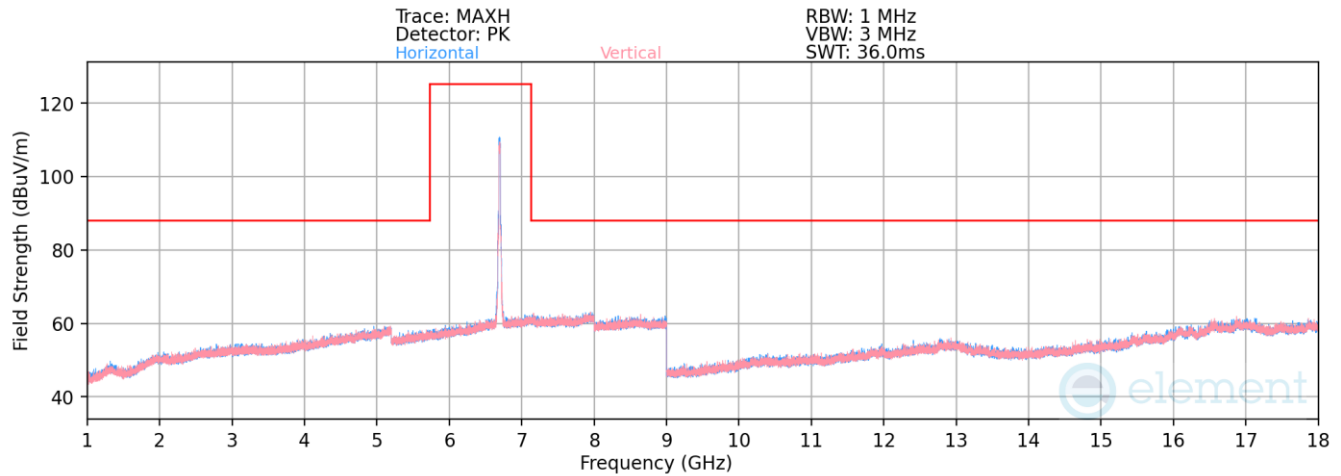

Plot 7-1640. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 149 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-86.00	21.78	42.78	53.98	-11.20
* 13390.00	Peak	H	-	-	-74.50	21.78	54.28	73.98	-19.70

Table 7-227. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 463 of 600

V 10.5 12/15/2021

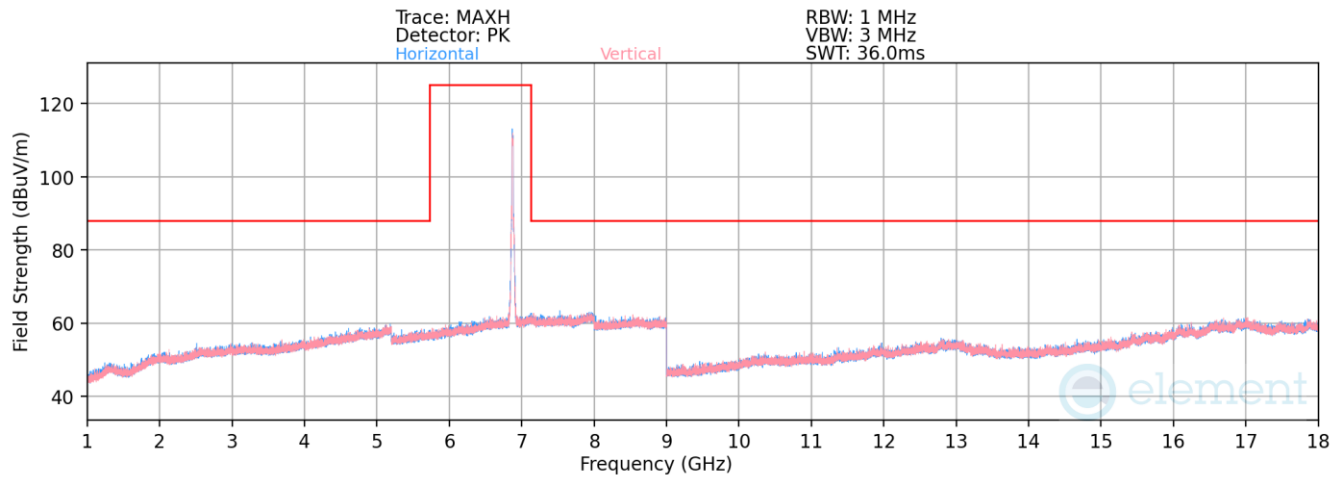

Plot 7-1641. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 185 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-85.97	21.49	42.52	68.23	-25.71
13750.00	Peak	H	-	-	-74.60	21.35	53.75	88.23	-34.48

Table 7-228. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 464 of 600

V 10.5 12/15/2021

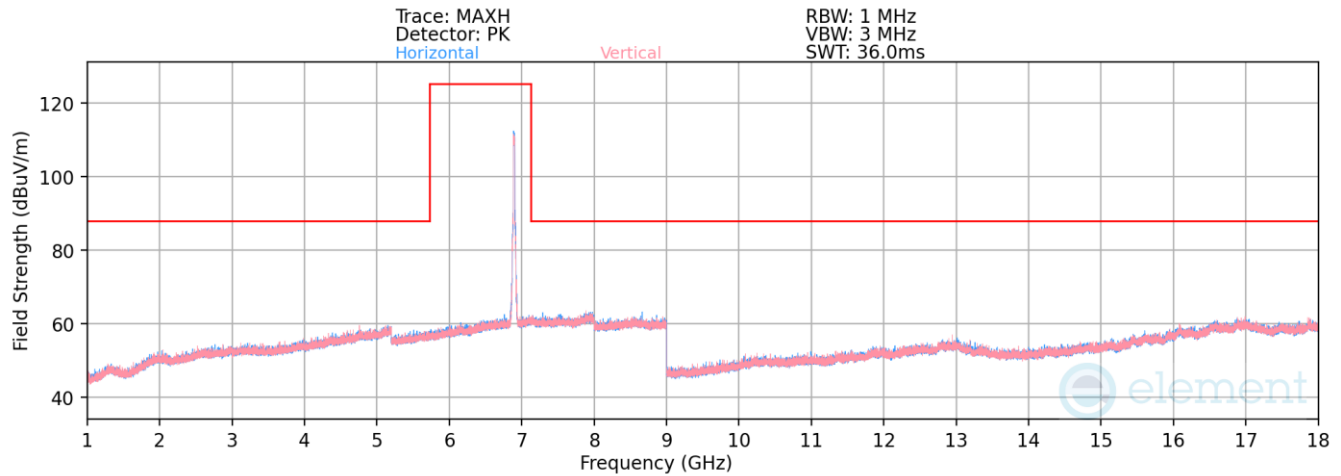

Plot 7-1642. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 189 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-86.34	21.78	42.44	68.23	-25.79
13790.00	Peak	H	-	-	-74.87	21.49	53.62	88.23	-34.61

Table 7-229. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device		Page 465 of 600

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

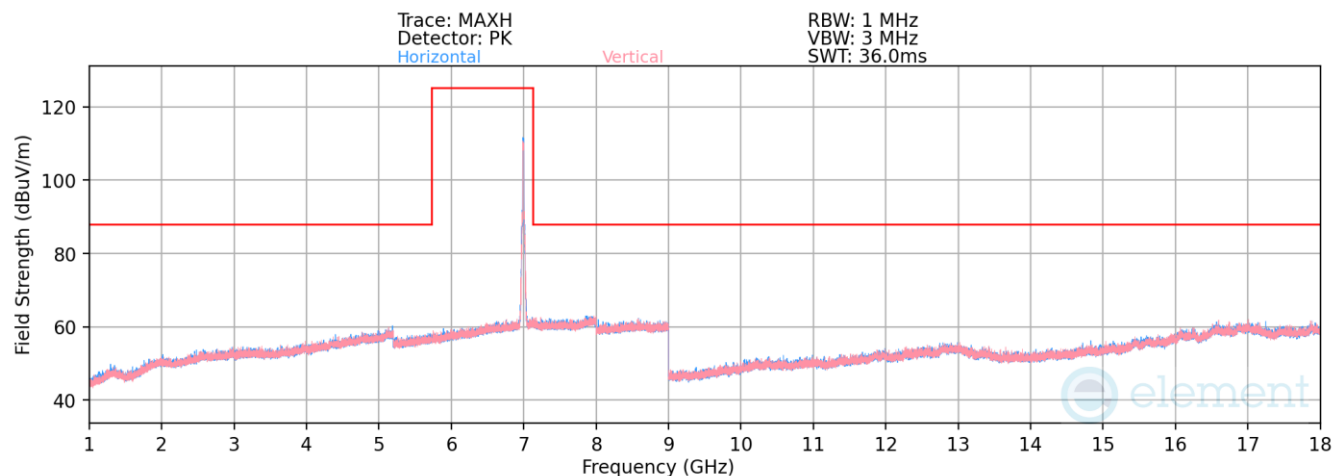

Plot 7-1643. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 209 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-86.63	21.84	42.21	68.23	-26.02
13990.00	Peak	H	-	-	-74.78	21.81	54.03	88.23	-34.20

Table 7-230. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 466 of 600

V 10.5 12/15/2021

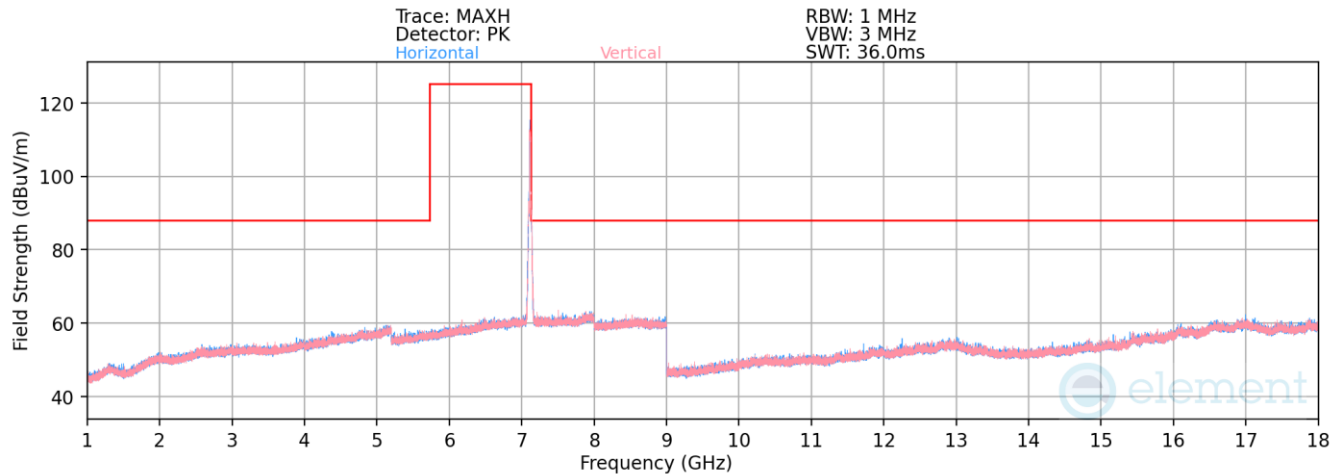

Plot 7-1644. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 233 – RU242)

Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	H	-	-	-86.50	22.31	42.81	68.23	-25.42
14230.00	Peak	H	-	-	-75.48	22.31	53.84	88.23	-34.39


Table 7-231. Radiated Spurious Emission Measurements Antenna 2a – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 467 of 600


V 10.5 12/15/2021

7.7.4 SDM Primary Radiated Spurious Emission

RU26

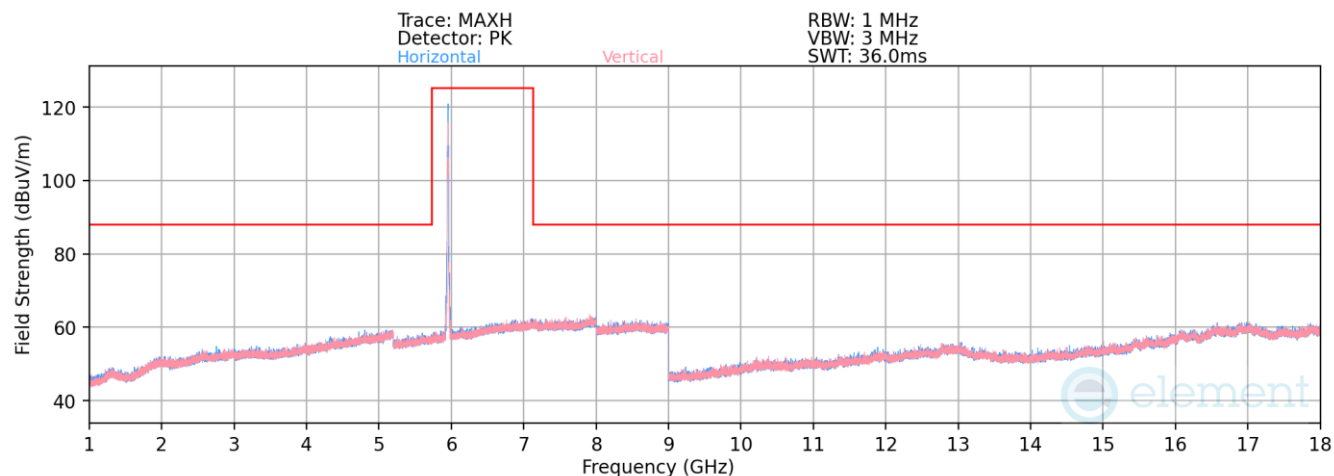

Plot 7-1645. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 1 – RU26)

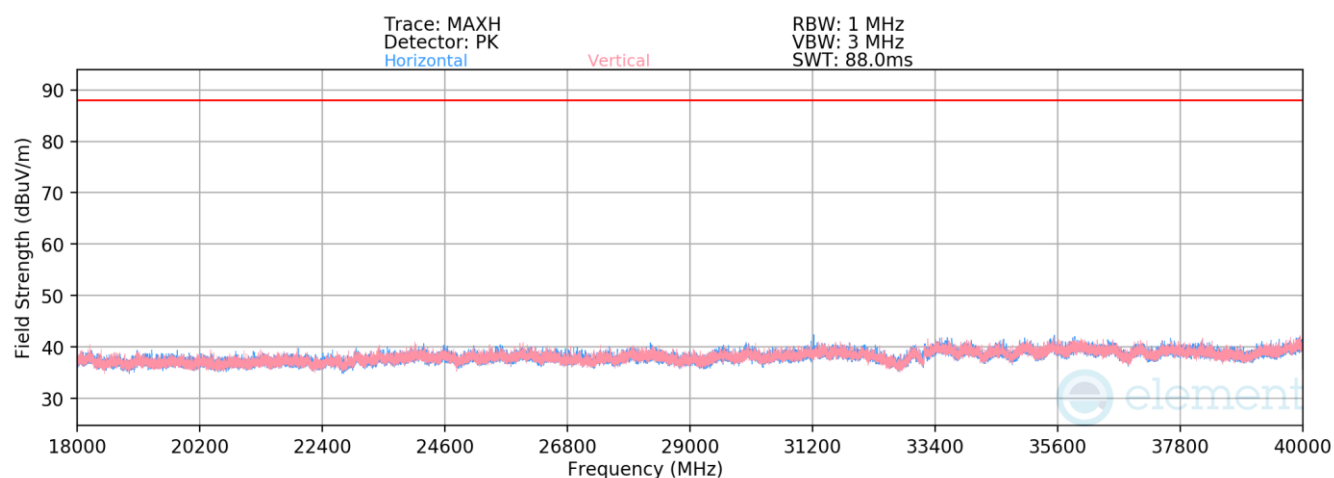

Plot 7-1646. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 1 – RU26)

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 468 of 600

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11910.00	Average	H	-	-	-85.71	20.05	41.34	53.98	-12.64
*	11910.00	Peak	H	-	-	-74.18	20.02	52.84	73.98	-21.14
*	17865.00	Average	H	-	-	-86.11	22.53	43.43	53.98	-10.55
*	17865.00	Peak	H	-	-	-74.87	22.53	54.66	73.98	-19.32

Table 7-232. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 469 of 600

V 10.5 12/15/2021

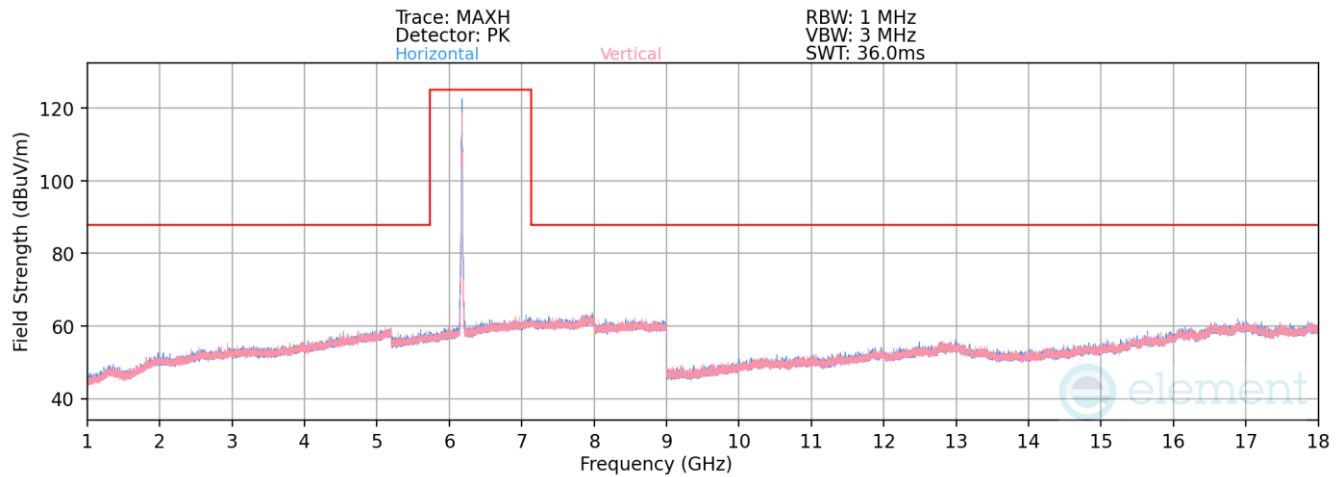

Plot 7-1647. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 45 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12350.00	Average	H	-	-	-85.95	20.69	41.74	53.98	-12.24
*	12350.00	Peak	H	-	-	-74.14	20.69	53.54	73.98	-20.44

Table 7-233. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 470 of 600

V 10.5 12/15/2021

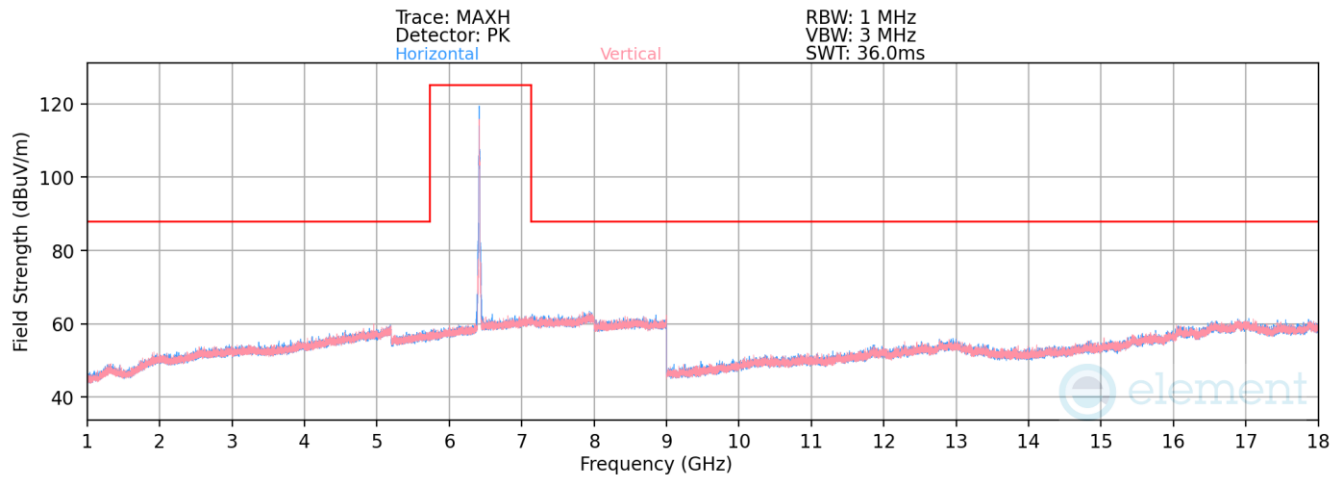

Plot 7-1648. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 93 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-85.95	21.72	42.77	68.23	-25.46
12830.00	Peak	H	-	-	-74.40	21.72	54.32	88.23	-33.91

Table 7-234. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 471 of 600

V 10.5 12/15/2021

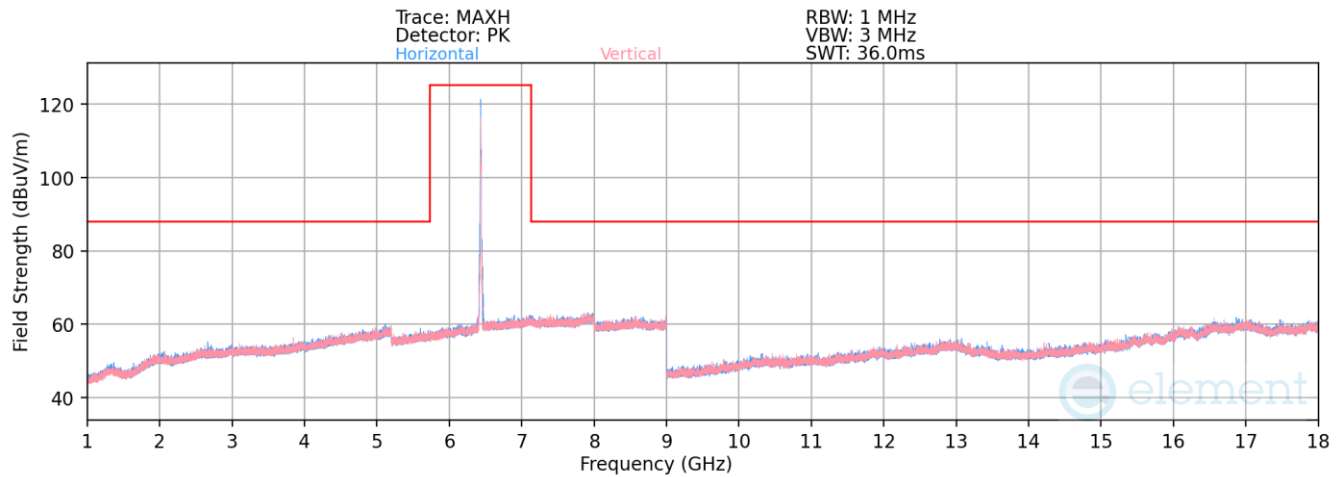

Plot 7-1649. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 97 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-85.56	21.49	42.93	68.23	-25.30
12870.00	Peak	H	-	-	-74.13	21.49	54.36	88.23	-33.87

Table 7-235. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 472 of 600

V 10.5 12/15/2021

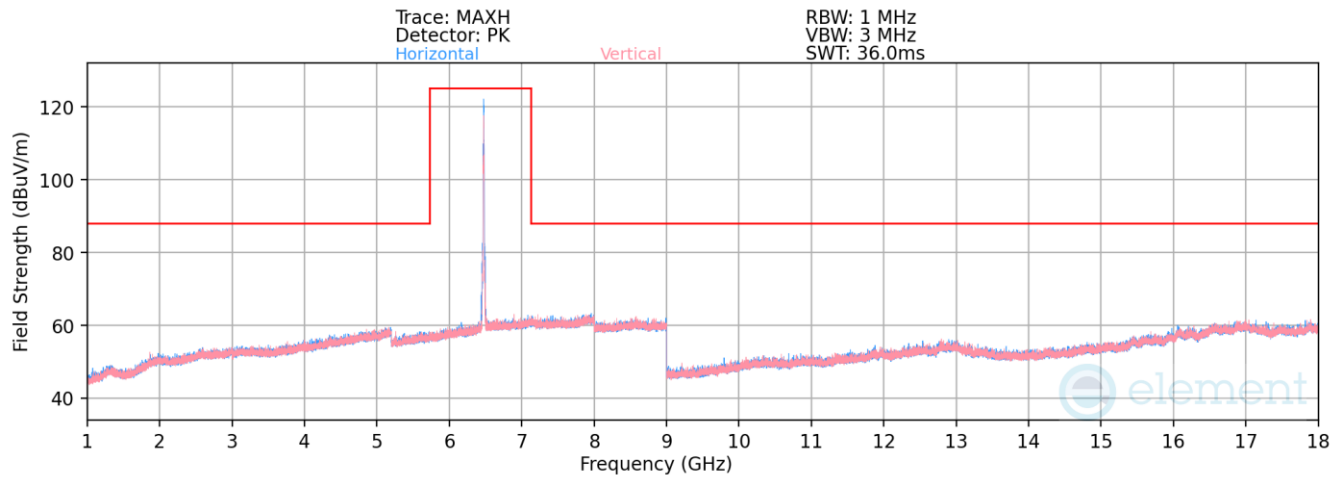

Plot 7-1650. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 105 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.67	21.56	42.89	68.23	-25.34
12950.00	Peak	H	-	-	-73.91	21.47	54.56	88.23	-33.67


Table 7-236. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 473 of 600

V 10.5 12/15/2021

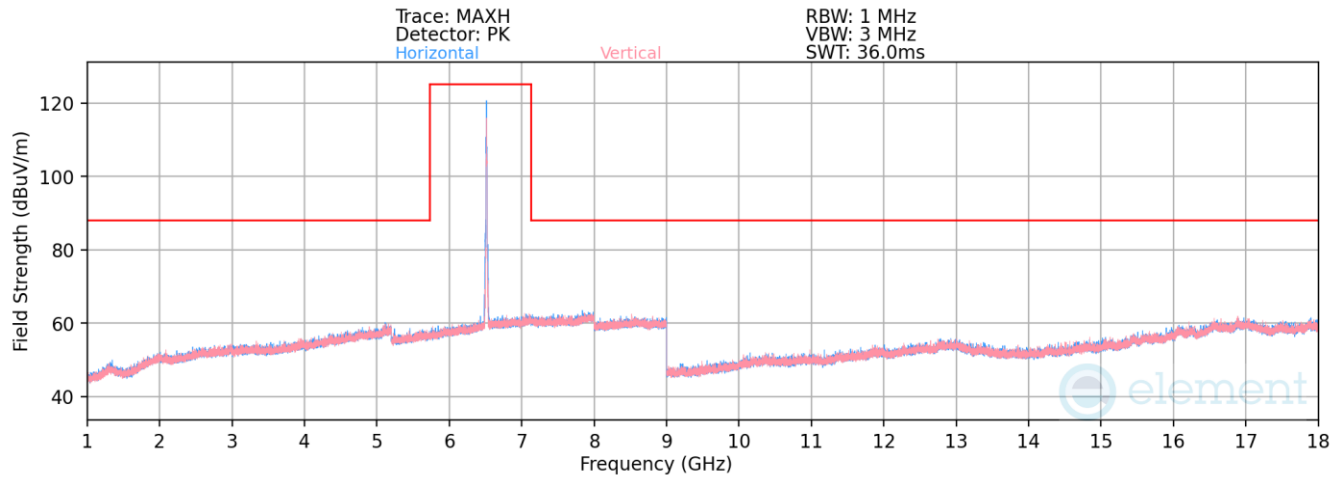

Plot 7-1651. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 113 – RU26)

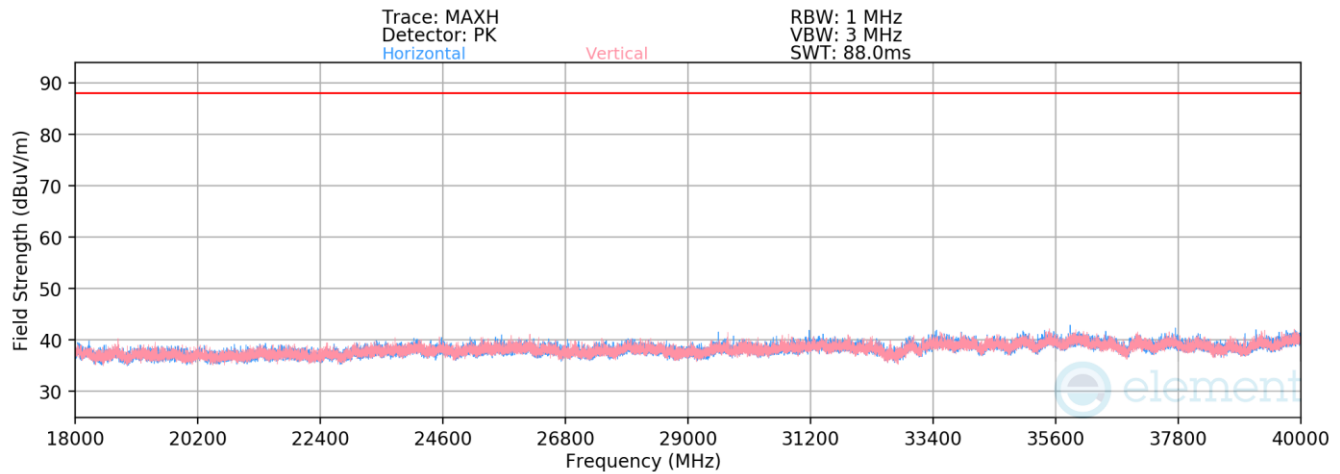

Plot 7-1652. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 113 – RU26)

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 474 of 600

V 10.5 12/15/2021


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.97	21.92	42.95	68.23	-25.28
13030.00	Peak	H	-	-	-74.29	21.84	54.56	88.23	-33.67

Table 7-237. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 475 of 600

V 10.5 12/15/2021

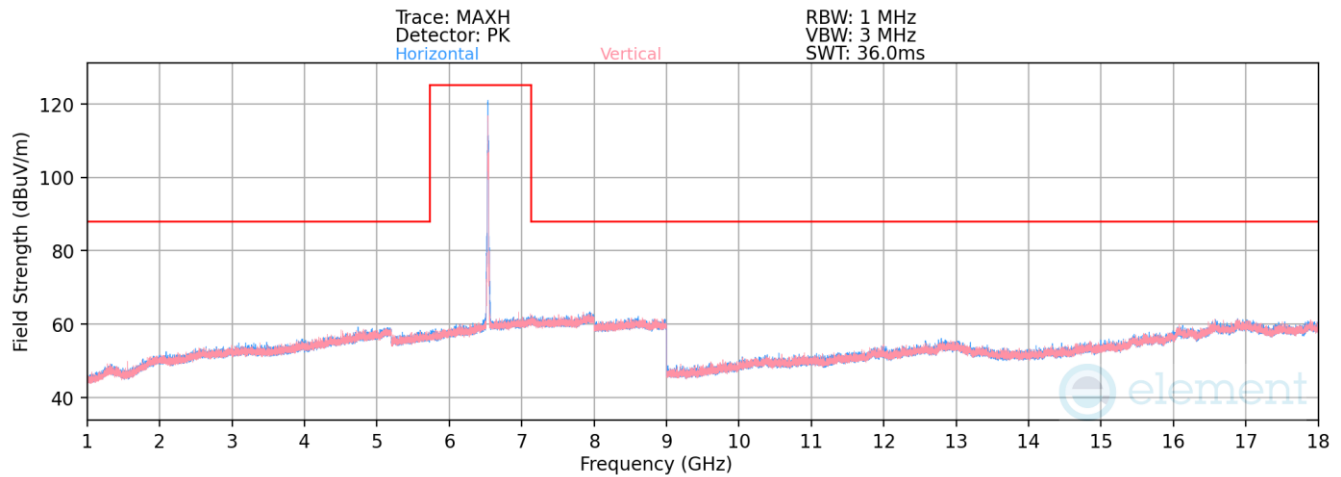

Plot 7-1653. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 117 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.73	21.60	42.87	68.23	-25.36
13070.00	Peak	H	-	-	-74.13	21.60	54.48	88.23	-33.75

Table 7-238. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 476 of 600

V 10.5 12/15/2021

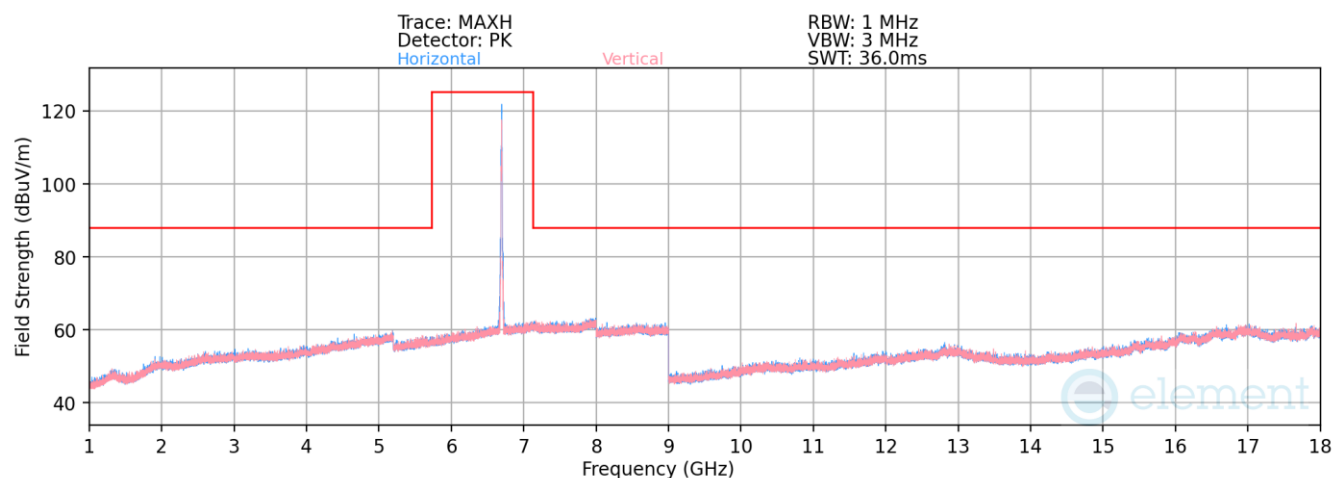

Plot 7-1654. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 149 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-85.87	21.78	42.92	53.98	-11.06
* 13390.00	Peak	H	-	-	-74.45	21.78	54.34	73.98	-19.64


Table 7-239. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 477 of 600

V 10.5 12/15/2021

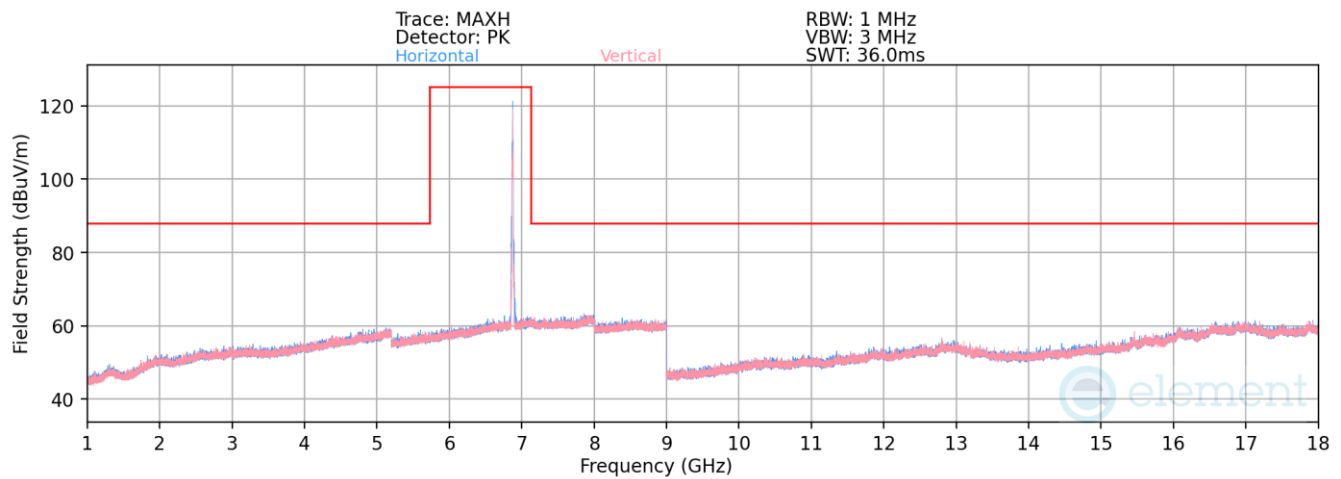

Plot 7-1655. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 185 – RU26)

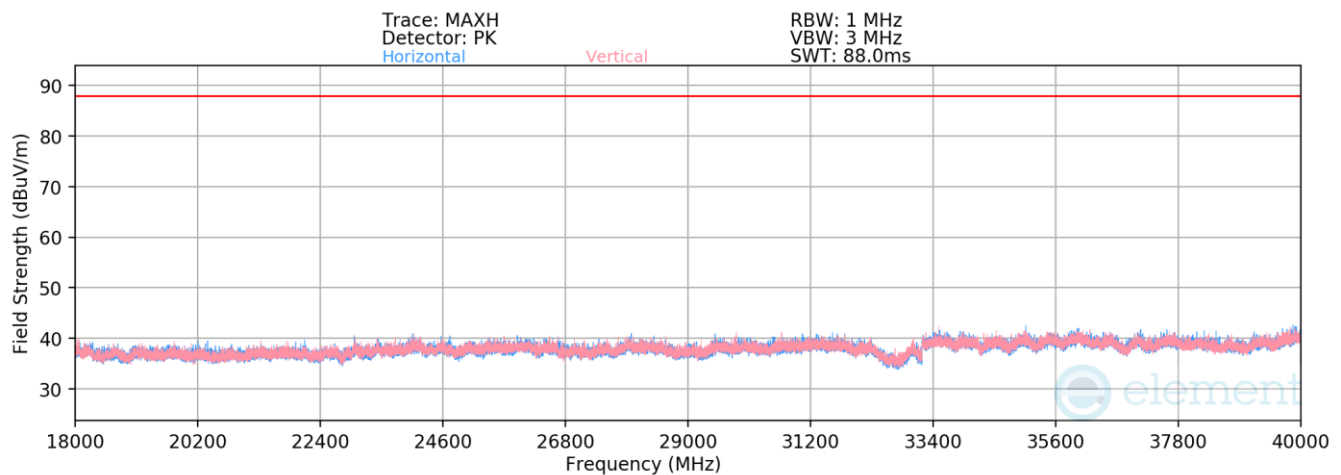

Plot 7-1656. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 185 – RU26)

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 478 of 600

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-86.32	21.35	42.03	68.23	-26.20
13750.00	Peak	H	-	-	-74.69	21.34	53.65	88.23	-34.58

Table 7-240. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 479 of 600

V 10.5 12/15/2021

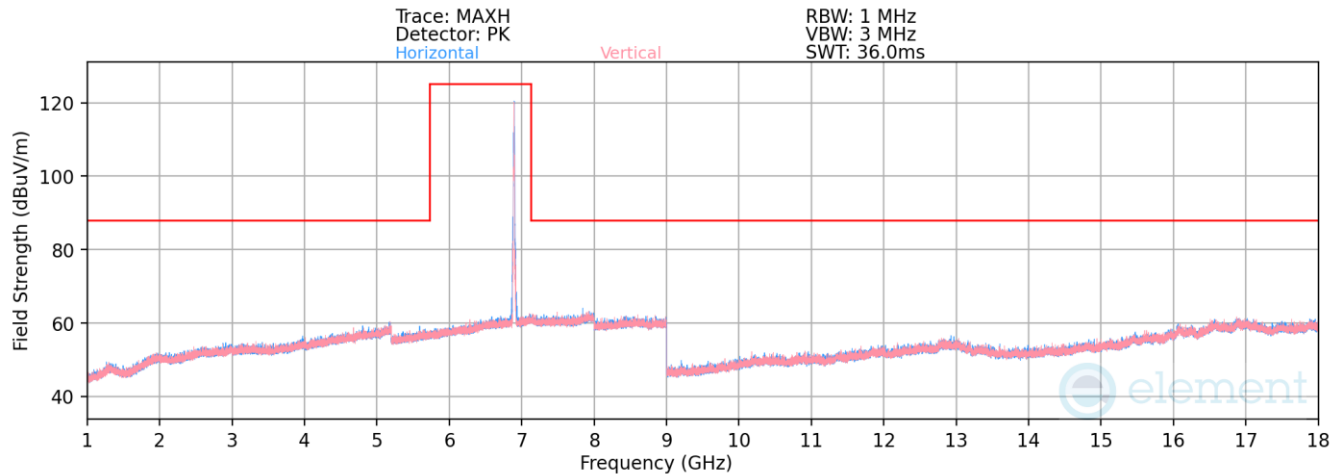

Plot 7-1657. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 189 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-86.51	21.94	42.43	68.23	-25.80
13790.00	Peak	H	-	-	-74.98	21.78	53.81	88.23	-34.42

Table 7-241. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 480 of 600

V 10.5 12/15/2021

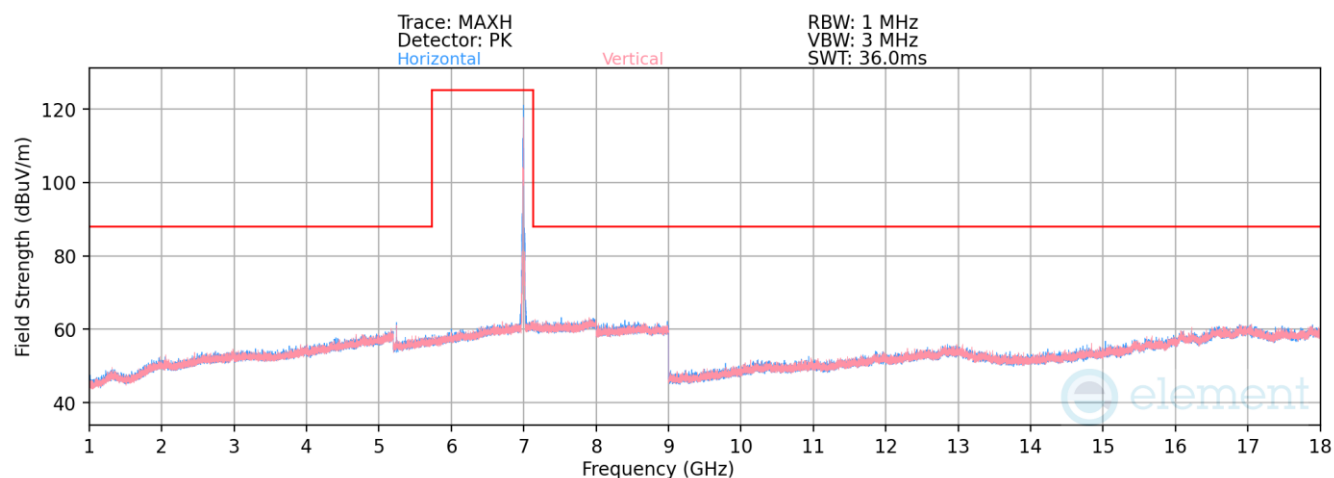

Plot 7-1658. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 209 – RU26)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
5245.00	Average	H	134	248	-73.68	20.25	53.57	68.23	-14.66
5245.00	Peak	H	134	248	-64.12	20.25	63.13	88.23	-25.10
13990.00	Average	H	-	-	-86.77	21.84	42.06	68.23	-26.17
13990.00	Peak	H	-	-	-75.37	21.81	53.44	88.23	-34.79


Table 7-242. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 481 of 600

V 10.5 12/15/2021

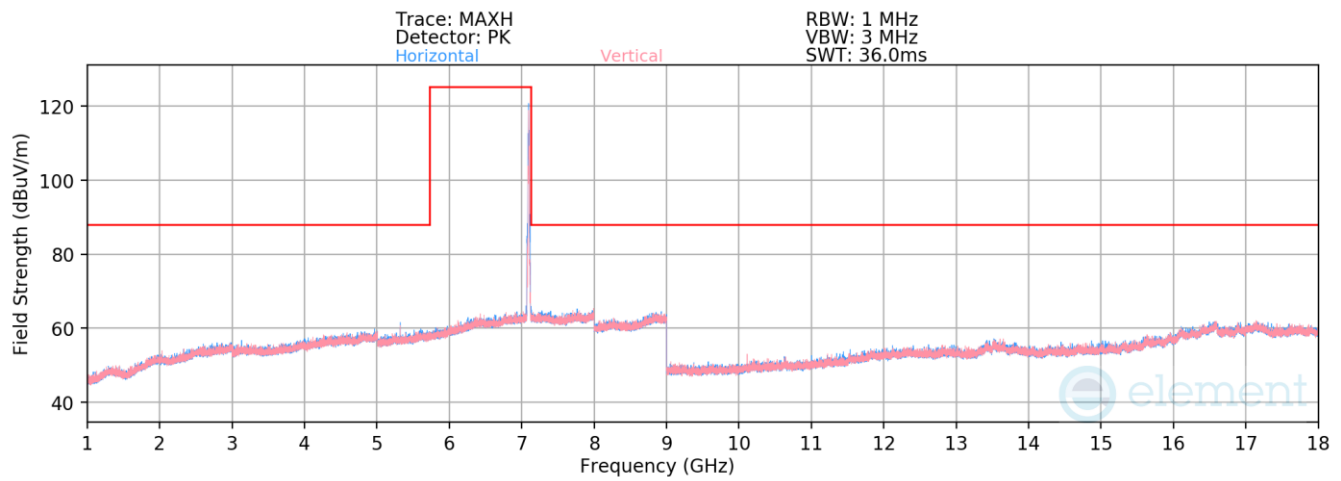

Plot 7-1659. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 229 – RU26)

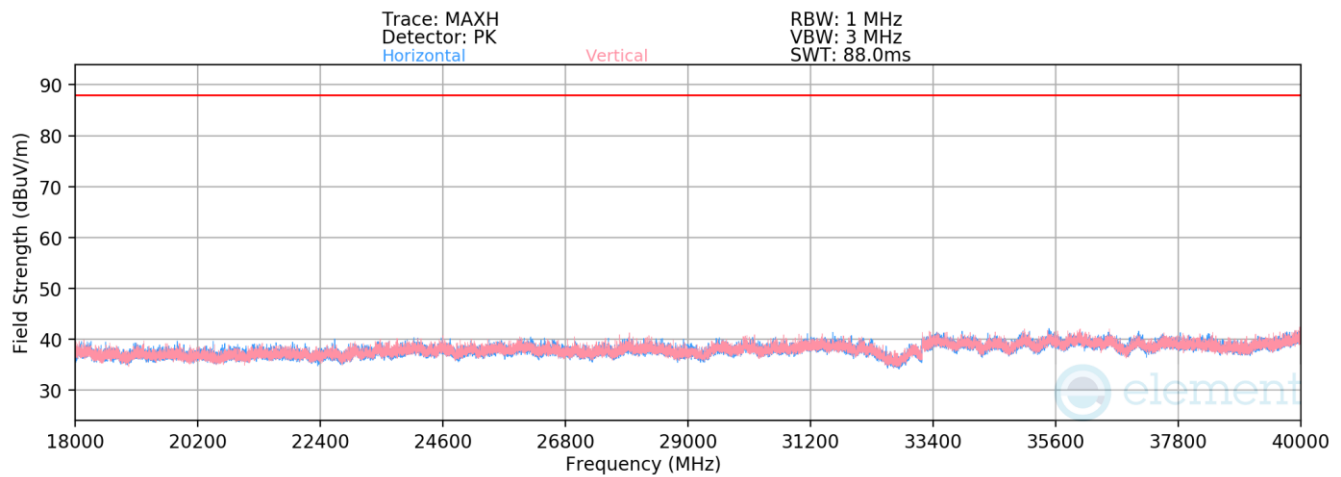

Plot 7-1660. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 229 – RU26)

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 482 of 600

V 10.5 12/15/2021

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7095MHz
 Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5322.00	Peak	H	132	252	-72.57	19.94	54.37	68.23	-13.86
5322.00	Average	H	132	252	-65.04	19.94	61.90	88.23	-26.33
14190.00	Peak	H	-	-	-85.80	22.53	43.73	68.23	-24.50
14190.00	Average	H	-	-	-73.81	22.46	55.65	88.23	-32.58

Table 7-243. Radiated Spurious Emission Measurements SDM Primary – RU26


FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 483 of 600

V 10.5 12/15/2021

RU242

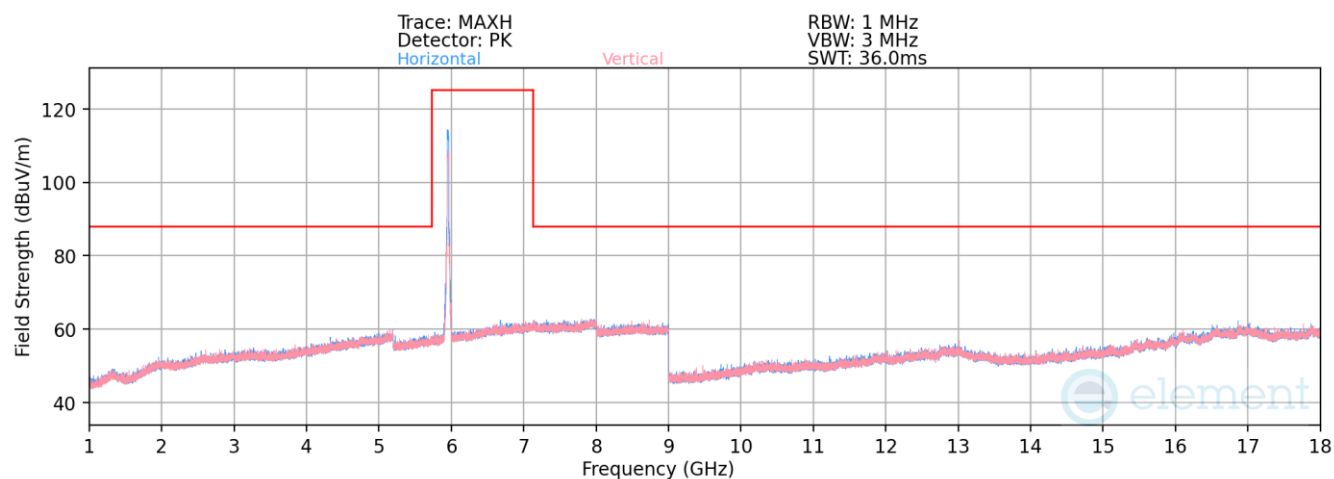

Plot 7-1661. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 1 – RU242)

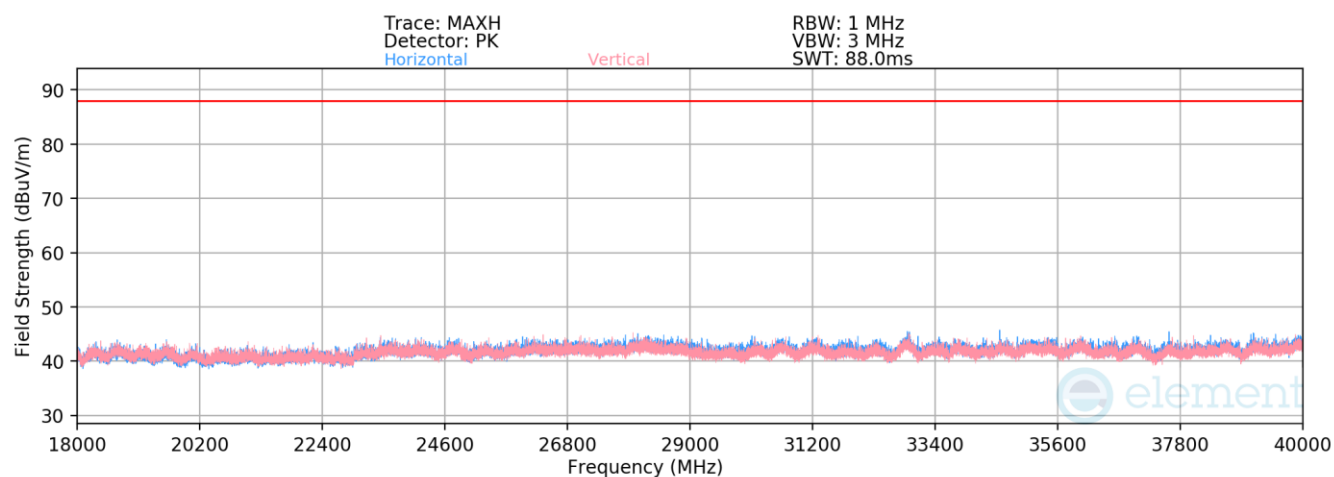

Plot 7-1662. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 1 – RU242)

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 484 of 600

V 10.5 12/15/2021


Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11910.00	Average	H	-	-	-85.93	20.35	41.42	53.98	-12.56
*	11910.00	Peak	H	-	-	-74.35	20.02	52.67	73.98	-21.31
*	17865.00	Average	H	-	-	-86.22	22.53	43.31	53.98	-10.67
*	17865.00	Peak	H	-	-	-74.57	22.53	54.96	73.98	-19.02

Table 7-244. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 485 of 600

V 10.5 12/15/2021

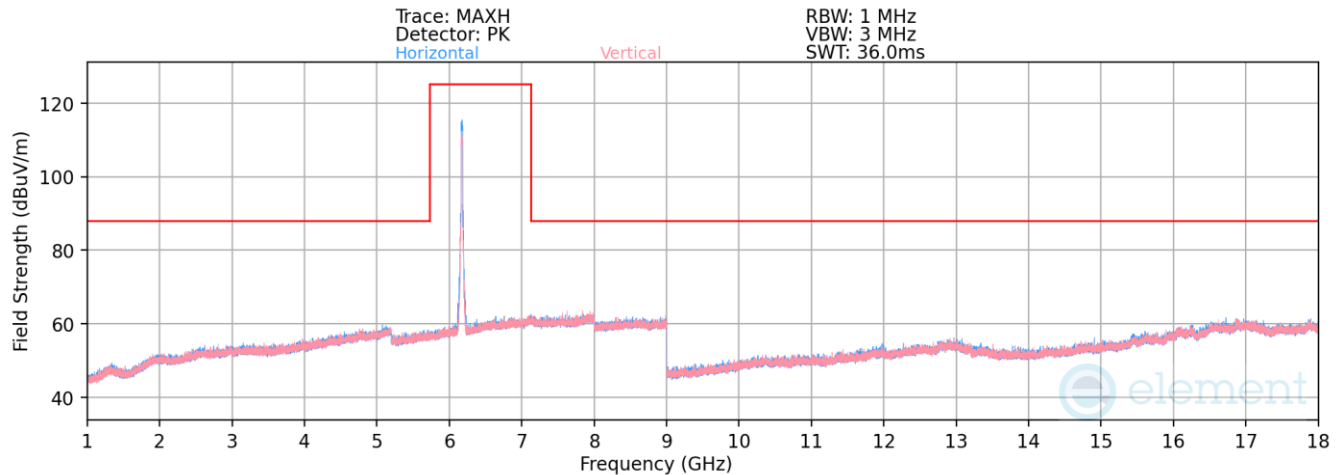

Plot 7-1663. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 45 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-86.09	20.69	41.59	53.98	-12.39
* 12350.00	Peak	H	-	-	-74.21	20.69	53.47	73.98	-20.51

Table 7-245. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 486 of 600

V 10.5 12/15/2021

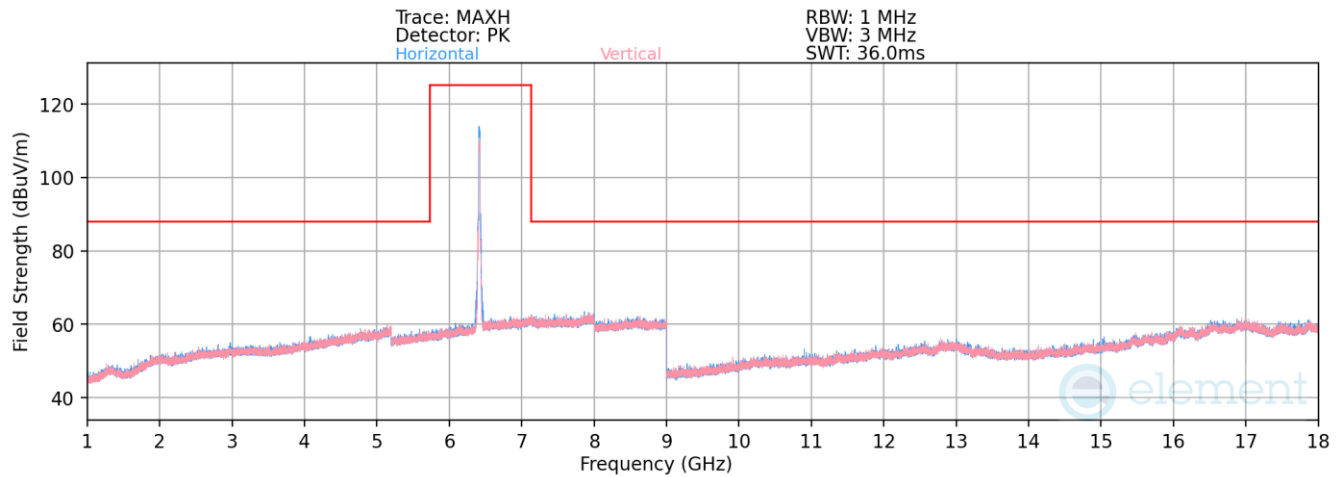

Plot 7-1664. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 93 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-86.21	21.97	42.76	68.23	-25.47
12830.00	Peak	H	-	-	-73.92	21.97	55.05	88.23	-33.18

Table 7-246. Radiated Spurious Emission Measurements SDM PRIMARY – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 487 of 600

V 10.5 12/15/2021

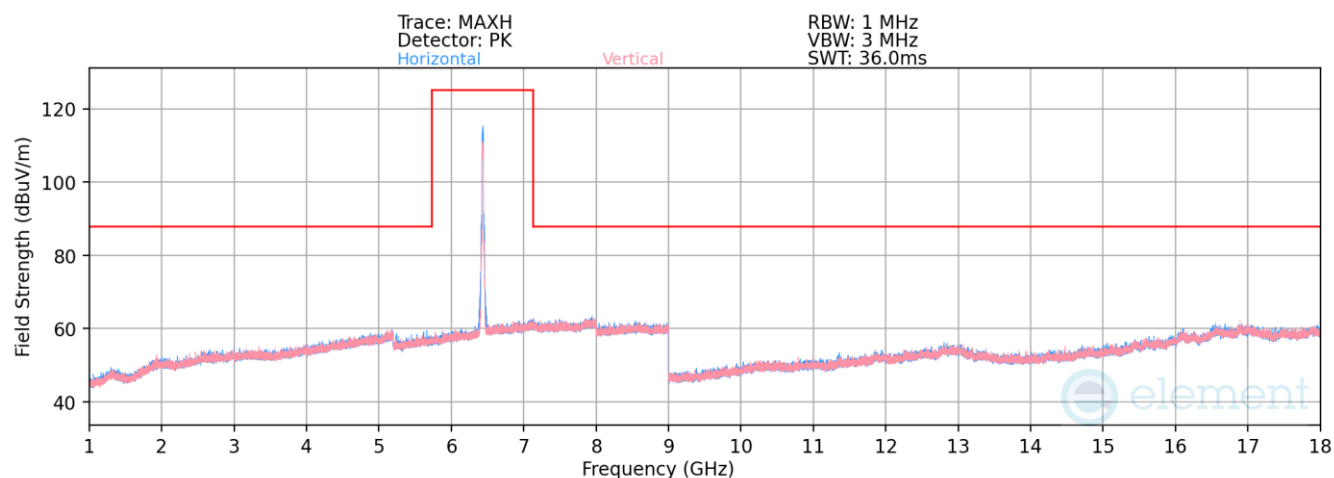

Plot 7-1665. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 97 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-85.26	21.49	43.23	68.23	-25.00
12870.00	Peak	H	-	-	-74.32	21.75	54.43	88.23	-33.80

Table 7-247. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 488 of 600

V 10.5 12/15/2021

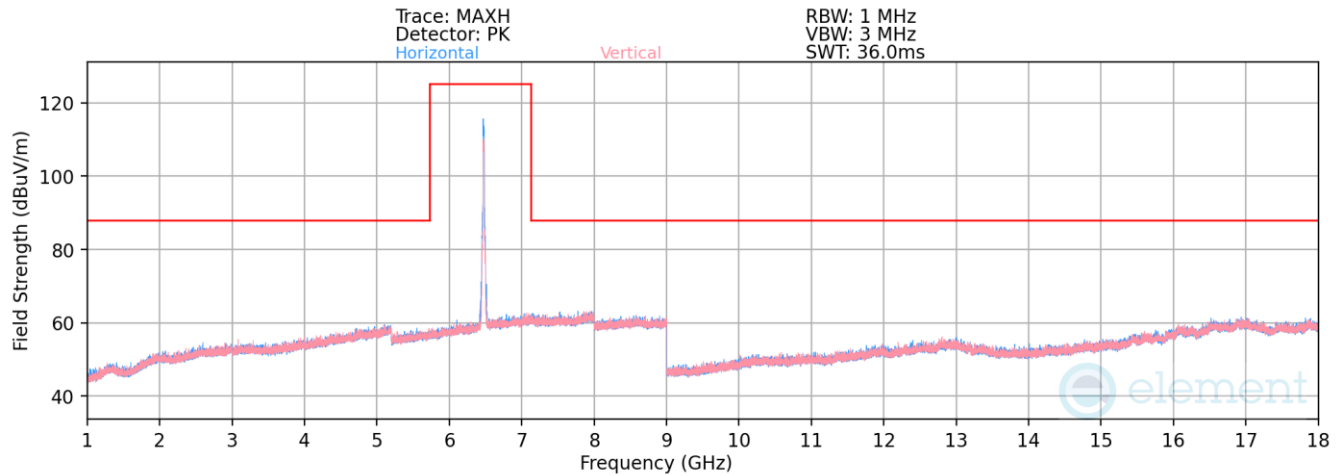

Plot 7-1666. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 105 – RU242)


Mode: 802.11ax
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-85.53	21.47	42.94	68.23	-25.29
12950.00	Peak	H	-	-	-74.02	21.47	54.45	88.23	-33.78


Table 7-248. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA2926 IC: 579C-A2926		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 489 of 600

V 10.5 12/15/2021

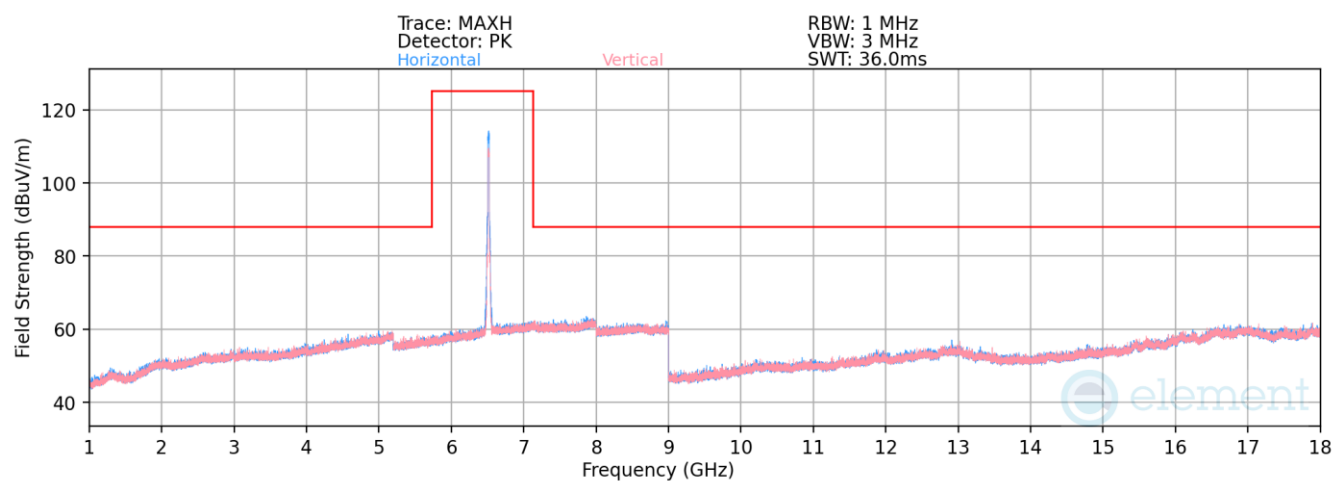

Plot 7-1667. Radiated Spurious Emissions above 1GHz SDM Primary (802.11ax – Ch. 113 – RU242)

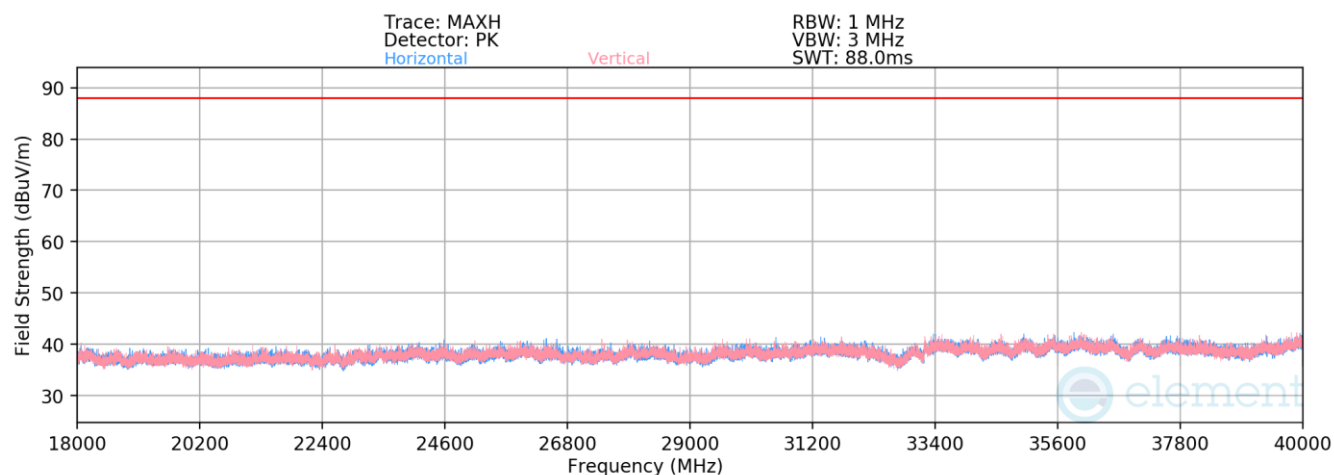

Plot 7-1668. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 113 – RU242)

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 490 of 600

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-85.88	21.89	43.02	68.23	-25.21
13030.00	Peak	H	-	-	-73.36	21.89	55.53	88.23	-32.70

Table 7-249. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA2926 IC: 579C-A2926	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270070-25.BCG	Test Dates: 1/3/2024 - 2/28/2024	EUT Type: Tablet Device	Page 491 of 600

V 10.5 12/15/2021